




City of
Los Banos
At the Crossroads of California

Contract Documents
for
Construction of

**HENRY MILLER AREA STORM DRAIN
AND
L STREET WATERLINE**

MARCH 2015

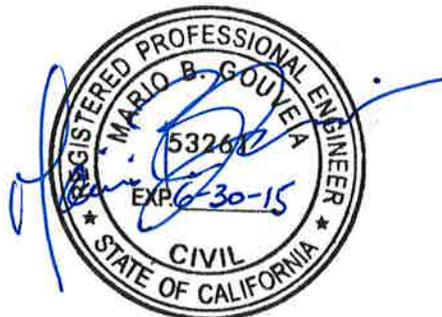

Bid Proposals must be received no later than 2:00 p.m. May 1, 2015
City of Los Banos City Clerk
520 J Street
Los Banos, CA 93635

City of Los Banos
Public Works Department

Table of Contents

Advertisement for Bids

Information for Bidders

Bid

Bid Bond

Sample Forms

- Agreement
- Certificate of Contractor
- Payment Bond
- Performance Bond
- Notice of Award
- Notice to Proceed
- Change Order

General Provisions

1. Terms and Definitions
2. Precedence of Plans, Specifications and Contract Documents
3. Venue
4. Giving Notice
5. Cumulative Remedies
6. Non-Discrimination
7. Non-Discrimination of the Disabled
8. Additional Instructions and Detail Drawings
9. Schedules, Reports and Records
10. Drawings and Specifications
11. Shop Drawings, Product Data and Samples
12. Materials, Services and Facilities
13. Inspection and Testing
14. Substitutions
15. Patents
16. Surveys, Permits and Regulations
17. Protection of Work, Property and Persons
18. Supervision by Contractor
19. Changes in the Work
20. Changes in Contract Price
21. Time for Completion and Liquidated Damages
22. Correction of Work
23. Suspension of Work, Termination and Delay
24. Progress Estimates
25. Progress Payments
26. Prompt Payment
27. Acceptance and Final Payment
28. Quantities and Unit Prices
29. Insurance
30. Contract Security
31. Assignments
32. Indemnification
33. Separate Contracts
34. Subcontracting
35. Employment of Apprentices
36. Payment of Prevailing Wages

37. Registration to Train Apprentices
38. Penalties
39. Engineer's Authority
40. Land and Rights-of-Way
41. Warranty and Guarantee
42. One (1) Year Warranty Period
43. Correction of Defective Work
44. Early Completion
45. Extended Warranties and Guarantees
46. Arbitration
47. Taxes
48. Contractor's Understanding
49. Accidents
50. Safety and Sanitation
51. Climatic Conditions
52. Officials Not to Benefit
53. Clean-Up
54. Notice to OWNER
55. Payment of Withheld Funds
56. Storm Water Pollution Prevention Measures

Special Provisions

1. Requirements
2. Description of Work
3. Commencement, Prosecution and Completion of Work
4. Special Construction Requirements
5. Hours of Work
6. City Permits and Business Licenses
7. Responsibility Regarding Existing Utilities and Private Property
8. Obstructions
9. Materials Furnished By OWNER
10. Materials Furnished By Contractor
11. Schedule of Values, Material List and Substitutions
12. Request for Extension of Time
13. Rights-of-Way
14. Coordination with Other Work
15. Closure of Streets
16. Construction Signs, Barricades, Lights and Flagmen
17. Traffic Control Plan
18. Disposal of Waste Materials
19. Noise control
20. Water Supply
21. Notifications
22. Work Not Listed in Proposal
23. Submittals
24. Bid Item Descriptions

Technical Specifications

1. Demolition
2. Aggregate Base
3. Concrete
4. AC Paving
5. Pipelines General
6. Water Distribution Pipelines
7. Storm Drainage Pipelines

8. Sanitary Sewer Pipelines
9. Thermoplastic
10. Painted Traffic Stripes and Markings

Advertisement For Bids

CITY OF LOS BANOS
520 J Street
Los Banos, California 93635

Separate sealed bids for the Contract Documents for the **Construction of HENRY MILLER AREA STORM DRAIN AND L STREET WATERLINE** will be received by the City of Los Banos at the office of the City Clerk until 2:00 p.m. (Pacific Daylight Savings Time), May 1, 2015 and then at said office publicly opened and read aloud.

The major WORK consists of furnishing and installing approximately 3,365 linear feet of waterline and trench patch, installing 27 water valves, transferring 17 water services, replacing 4 fire hydrant assemblies, connecting to 2 existing fire hydrants, furnishing and installing approximately 3,500 linear feet of storm drain line and trench patch, constructing 14 manholes, constructing 3 catch basins, and installing sewer lateral reconnections in the City of Los Banos.

The time for completion is fifty five (55) working days.

The Contract Documents, in their entirety, can be viewed and/or obtained from the City of Los Banos website at www.losbanos.org or at the following locations:

Central California Builders Exchange, 1244 N. Mariposa, Fresno, CA 93703 (www.cencalbx.com)

Builders Exchange of Stockton, 7500 N. West Lane, Stockton, CA 95210 (www.besonline.com)

Valley Builders Exchange, Inc., 1118 Kansas Avenue, Modesto, CA 95351 (www.valleybx.com)

Builders Exchange of Merced/Mariposa, 415 West 18th Street, Ste. 7, Merced, CA 95340

Dodge Data & Analytics 1-800-393-6343 <http://dodge.construction.com/Plans/>

A payment bond prepared and executed in accordance with California Civil Code Section 3247 and a bond for faithful performance of the contract will be required of the Contractor who is awarded the contract.

The successful Bidder must comply with the latest general prevailing rate of per diem wages as determined by the Director of Industrial Relations, State of California, Department of Industrial Relations and is to be paid to the various craftsmen and laborers required to construct said improvements and is made a part of the Specifications and Contract for said work to which reference is hereby made for further particulars.

No contractor or subcontractor may be listed on a bid proposal for a public works project (submitted on or after March 1, 2015) unless registered with the Department of Industrial Relations pursuant to Labor Code section 1725.5.

No contractor or subcontractor may be awarded a contract for public work on a public works project (awarded on or after April 1, 2015) unless registered with the Department of Industrial Relations pursuant to Labor Code section 1725.5.

This project is subject to compliance monitoring and enforcement by the Department of Industrial Relations. Contractor Registration Information can be found at:

<http://www.dir.ca.gov/Public-Works/PublicWorks.html>

Each Bid shall be accompanied by cashier's or certified check or by a bidder's bond, made payable to the City of Los Banos and executed by a corporate surety licensed to issue surety bonds in the State of California, for an amount equal to at least ten percent (10%) of the amount of said bid and no bid shall be considered unless such cashier's or certified check or bidder's bond is enclosed therewith.

The successful bidder of this project shall have the following current and active California State Contractor's License at the time of the submission of the Bid and throughout the duration of the contract: Class A – General Engineering Contractor or C34 – Pipeline Contractor.

Bidders shall refer to information for Bidders for complete instructions.

The City specifically reserves the right, in its sole discretion, to reject any or all Bids, to re-bid, or to waive inconsequential defects, in bidding not involving time, or quality of the work. The City may reject any and all Bids and waive any minor irregularities in the Bids.

Information for Bidders

BIDS will be received by the City of Los Banos (herein called the "OWNER"), at the office of the City Clerk until 2:00 p.m. (PDST), on May 1, 2015, then at said office, publicly opened and read aloud.

The major WORK consists of furnishing and installing approximately 3,365 linear feet of waterline and trench patch, installing 27 water valves, transferring 17 water services, replacing 4 fire hydrant assemblies, connecting to 2 existing fire hydrants, furnishing and installing approximately 3,500 linear feet of storm drain line and trench patch, constructing 14 manholes, constructing 3 catch basins, and installing sewer lateral reconnections in the City of Los Banos. The time for completion is fifty (55) working days.

Each BID must be submitted in a sealed envelope and addressed to the City of Los Banos at 520 J Street, Los Banos, CA 93635. Each sealed envelope containing a Bid must be plainly marked on the outside as "**HENRY MILLER AREA STORM DRAIN AND L STREET WATERLINE : Attention City Clerk**", and the envelope shall also bear on the outside, the name of the CONTRACTOR, and their address. If forwarded by mail, the sealed envelope containing the BID must be enclosed in another envelope addressed to the City of Los Banos at 520 J Street, Los Banos, CA, 93635, and also clearly state, "**HENRY MILLER AREA STORM DRAIN AND L STREET WATERLINE: Attention City Clerk**".

A complete BID includes the Bid Form, List of Subcontractors, Equal Employment Opportunity, Non-Collusion Affidavit, Debarment and Suspension Certification, Bid Schedule, Statement of Qualifications, Bid Bond with surety, and a copy of a current Contractor's License in the State of California. A signed Addendum, if issued, must also be submitted with the sealed BID. The Total Bid Amount must be filled in, in ink or typewritten, and the BID must be fully completed and executed when submitted unless otherwise indicated. Only one set of original BID forms are required to be submitted. Mistakes must be corrected and the correction inserted; correction must be initialed in ink by person or persons signing the BID. No conditional BIDs will be accepted.

The BID shall be signed by a person or persons legally authorized to bind BIDDER to the Contract. The individual or individuals signing each document shall warrant that they are authorized to bind the BIDDER.

The OWNER may waive any informalities or minor defects or reject any and all BIDS. Any BID may be withdrawn prior to the above scheduled time for the opening of BIDS or authorized postponement thereof. Any BID received after the time and date specified shall not be considered. No BIDDER may withdraw a BID within 30 days after the actual date of the opening thereof. Should there be reasons why the Contract cannot be awarded within the specified period, the time may be extended by mutual agreement between the OWNER and the BIDDER.

Each BID must be accompanied by a BID BOND payable to the OWNER for ten percent (10%) of the total amount of the BID. As soon as the BID amounts have been compared, the OWNER will return the bid security of all except the three lowest responsive and responsible BIDDERS. Once a CONTRACTORS BID has been awarded, the PAYMENT BOND and PERFORMANCE BOND of the successful CONTRACTOR has been received by the OWNER, the bid security of the three remaining lowest responsive and responsible BIDDERS will be returned.

All bonds must be acknowledged before a Notary Public by both the CONTRACTOR and the Surety. Attorneys-in-fact who sign Bid Bonds or Payment Bonds and Performance Bonds must file with each bond a certified and effective dated copy of their power of attorney.

Award and Execution of Contract

The party to whom the Contract is awarded will be required to execute the AGREEMENT, and obtain the PERFORMANCE BOND and PAYMENT BOND along with satisfactory evidence of insurance within ten (10) calendar days from the date when the NOTICE OF AWARD is delivered to the BIDDER. The NOTICE OF AWARD shall be accompanied by the necessary AGREEMENT and BOND forms. In case of failure of the BIDDER to execute the AGREEMENT, the OWNER may, at his option, consider the BIDDER in default, in which case the BID BOND accompanying the BID shall become the property of the OWNER.

A PERFORMANCE BOND and a PAYMENT BOND, each in the amount of 100 percent of the CONTRACT PRICE, with a corporate surety named on the current list of "Surety Companies Acceptable on Federal Bonds" as published in the Treasury Department Circular Number 570, will be required for the faithful performance of the Contract. The PAYMENT BOND must be issued by an admitted surety insurer holding a certificate of authority to transact surety insurance in California issued by the Insurance Commissioner.

All bonds must be acknowledged before a Notary Public by both the CONTRACTOR and the Surety. Attorneys-in-fact who sign Bid Bonds or Payment Bonds and Performance Bonds must file with each bond a certified and effective dated copy of their power of attorney.

The OWNER, within 15 days of receipt of the PERFORMANCE BOND, PAYMENT BOND and AGREEMENT signed by the party to whom the Contract was awarded, shall sign the AGREEMENT and return to such party an executed duplicate of the AGREEMENT. Should the OWNER not execute the AGREEMENT within such period, the BIDDER may, by written notice, withdraw his signed AGREEMENT. Such notice of withdrawal shall be effective upon receipt of the notice by the OWNER.

The NOTICE TO PROCEED shall be issued within 10 days of the execution of the AGREEMENT by the OWNER. Should there be reasons why the NOTICE TO PROCEED has not been issued within such period, the time may be extended by mutually agreed upon, and the CONTRACTOR may terminate the AGREEMENT without further liability on the part of either party.

All applicable laws, ordinances, and the rules and regulations of all authorities having jurisdiction over construction of the PROJECT shall apply to the Contract throughout.

Subcontractors

The SUBCONTRACTORS listed by CONTRACTOR in the BID shall list therein the name and address of each SUBCONTRACTOR to whom the CONTRACTOR proposes to subcontract portions of the work in an amount in excess of one-half of one percent of the total BID or \$10,000, whichever is greater, in accordance with the Subletting and Subcontracting Fair Practices Act, commencing with Section 4100 of the Public Contract Code. The CONTRACTOR'S attention is invited to other provisions of the Act related to the imposition of penalties for a failure to observe its provisions by using unauthorized SUBCONTRACTORS or by making unauthorized substitutions.

Registration with California Department of Industrial Relations (DIR)

A CONTRACTOR or SUBCONTRACTOR shall not be qualified to bid on, be listed in a bid proposal, subject to the requirements of Section 4104 of the Public Contract Code, or engage in the performance of any contract for public work, as defined in this chapter, unless currently registered and qualified to perform public work pursuant to Section 1725.5. It is not a violation of this section for an unregistered contractor to submit a bid that is authorized by Section 7029.1 of the business and Professions Code or by Section 10164 or 20103.5 of the Public Contract Code, provided the

CONTRACTOR is registered to perform public work pursuant to Section 1725.5 at the time the CONTRACT is awarded. Labor Code Section 1771.1(a) requires CONTRACTORS and their SUBCONTRACTORS to possess and maintain such registration with DIR in order to be awarded and to perform on public works projects (regardless of funding source).

Pursuant to Section 1771.4, each CONTRACTOR and SUBCONTRACTOR shall furnish certified payroll records to the Labor Commissioner at least monthly and in a format prescribed by the Labor Commissioner of the DIR. Until such time that the DIR gives awarding agencies direct access to all certified payrolls submitted by CONTRACTORS and SUBCONTRACTORS, CONTRACTOR and his SUBCONTRACTORS are also required to submit copies of payroll records to OWNER on a monthly basis. Information on the above can be found at:

<http://www.dir.ca.gov/Public-Works/PublicWorks.html>

Prevailing Wage

This WORK is subject to prevailing wage requirements. If there is a difference between the minimum wage rates predetermined by the Secretary of Labor and the prevailing wage rates determined by the Director of the Department of Industrial Relations of the State of California for similar classification of labor, the CONTRACTOR and his SUBCONTRACTOR shall not pay less than the higher wage rate. In accordance with the provisions of Section 1773 of the Labor Code of the State of California, the OWNER has obtained from the Director of the Department of Industrial Relations, the general prevailing rate for each craft, classification, or type of workman required for execution of the AGREEMENT. A copy of said prevailing rate of per diem wages is on file in the office of the OWNER, and available from the California Department of Industrial Relations' Internet web site at <http://www.dir.ca.gov/DLSR/PWD>.

The Federal minimum wage rates for this WORK as predetermined by the United States Secretary of Labor may be examined at the offices described above where the Provisions may be seen. Addenda to modify the Federal minimum wage rates, if necessary, will be posted on the internet at www.losbanos.org. Future effective general prevailing wage rates, which have been predetermined are on file with the California Department of Industrial Relations and are referenced but not printed in the general prevailing wage rates.

Pre-Bid Meeting

Prior to submitting a sealed BID, BIDDER will attend a mandatory pre-bid meeting at the project site. The date of the mandatory pre-bid meeting is Tuesday, April 14, 2015. BIDDERS shall meet at the intersection of West I Street and L Street, in Los Banos, California. The start time for the meeting is 10 a.m.. **BIDS will not be considered from bidders who were not physically in attendance at the mandatory pre-bid meeting.**

BIDDERS must satisfy themselves as to the accuracy of the estimated quantities in the Bid Schedule by examination of the site and a review of the DRAWINGS and SPECIFICATIONS including ADDENDA. After BIDS have been submitted, the BIDDER shall not assert that there was misunderstanding concerning the quantities of WORK or the nature of the WORK to be done. The failure or omission of any BIDDER to do any of the foregoing shall not relieve any BIDDER from any obligation with respect to his BID.

The CONTRACT DOCUMENTS contain the provisions required for the construction of the PROJECT. The OWNER will not be responsible for, nor be bound by, any oral instructions, interpretations, or explanations issued by the OWNER or its representatives. Any request for clarifications or questions of the CONTRACT DOCUMENTS shall be made in writing or email and deliverable to:

City of Los Banos Public Works Department
 Attn: Greg Pimentel
 greg.pimentel@losbanos.org
 411 Madison Avenue
 Los Banos, CA 93635

Requests for clarification or questions shall be delivered to the OWNER by 5:00 p.m. PDST on April 22, 2015. Any OWNER response to a request for clarification, questions and answers will be posted to the City's website at www.losbanos.org no later than 5:00 p.m. PDST on April 24, 2015 and if necessary, become a part of the BID as an ADDENDUM.

Proposed timeline of events associated with the awarding of BID:

Release of Advertisement for Bid		April 03, 2015
Pre-Bid Meeting – On Site - Mandatory	10:00 a.m.	April 14, 2015
Deadline to Submit Questions/Clarifications	5:00 p.m.	April 22, 2015
Addendum/Questions/Clarifications posted	5:00 p.m.	April 24, 2015
Bid Opening	2:00 p.m.	May 01, 2015
City Council Awards Bid		May 20, 2015 (tentative)
Issuance of a Notice to Proceed	On or before:	June 1, 2015 (tentative)
Construction to Begin	On or before:	June 11, 2015 (tentative)

Qualification of Bidder

The OWNER may make such investigation as it deems necessary to determine the ability of the BIDDER to provide the services requested, and the BIDDER shall furnish to the OWNER all information and data for this purpose as the OWNER may request. The OWNER reserves the right to reject any BID should the evidence submitted by, or investigation of, the BIDDER fail to satisfy the OWNER that such BIDDER is properly qualified to carry out the obligations of the BID and to complete the requirements contemplated therein.

Governing Law and Venue

This BID, or any Contract that may result from the award of this BID, shall be deemed to be made under, and shall be governed by and construed in accordance with, the laws of the State of California. Any action brought to enforce the terms, or provision of this BID or any Contract that may result from the award of this BID, shall have venue in the County of Merced, State of California.

Mandatory BID Protest Procedure

The lack of prompt procedure to resolve disputes regarding the bidding process would impair the OWNER'S ability to carry out its purpose of contracting this project in a timely manner. Therefore, to the maximum extent authorized by law and notwithstanding any other procedures specified in these CONTRACT DOCUMENTS, all disputes and/or protests regarding the bidding process shall be subject to the following procedure. In submitting a BID to the OWNER for this WORK, the BIDDER agrees to comply with and to be bound by this procedure.

Any bid protest must be submitted in writing to the OWNER before 5:00 p.m. on the fifth (5th) working day following bid opening.

1. The initial protest document must contain a complete statement of the basis for the protest, and all supporting documentation. A non-refundable fee of One Thousand Dollars (\$1,000.00) made payable to the "City of Los Banos" shall accompany the protest documents and will be used by the OWNER to recover costs in evaluating the bid protest. A bid protest submitted without the requisite fee shall not be considered by the OWNER.

2. The party filing the protest must have actually submitted a BID for the WORK. A SUBCONTRACTOR of a party submitting a BID for the WORK may not submit a bid protest.
3. A party may not rely on the bid protest submitted by another BIDDER, but must timely pursue its own protest.
4. The protest must refer to the specific portion of the CONTRACT DOCUMENTS which forms the basis for the protest.
5. The protest must include the name, address and telephone number of the person representing the protesting party.
6. The party filing the protest must concurrently transmit a copy of the initial protest document and any attached documentation to all other parties with a direct financial interest which may be adversely affected by the outcome of the protest. Such parties shall include all other BIDDERS who appear to have a reasonable prospect of receiving an award depending upon the outcome of the protest.
7. The OWNER will give the protested BIDDER five (5) working days after the receipt of the protest to submit a written response. The responding BIDDER shall transmit the response to the protesting BIDDER concurrent with the delivery to the OWNER.
8. The procedure and time limits set forth in this paragraph are mandatory and are the BIDDERS sole and exclusive remedy in the event of bid protest. The BIDDERS failure to comply with these procedures shall constitute a waiver of any right to further pursue the bid protest, including filing a Government Code Claim or legal proceedings.

If the OWNER determines that a protest is frivolous, the protesting BIDDER may be determined to be non-responsive and/or non-responsible and that BIDDER may be determined to be ineligible for future contract awards.

Cancellation of Contract

The OWNER may terminate any Contract derived from this BID as follows:

- WITHOUT CAUSE at any time by giving thirty (30) calendar days written notice to the successful CONTRACTOR;
- WITH CAUSE (Default) at any time by giving ten (10) calendar days written notice to the successful CONTRACTOR. Cancellation for cause shall be at the discretion of the OWNER and shall be, but is not limited to, failure to supply the items, materials, equipment or services specified within the time allowed or within the terms, conditions or provisions of this BID. The successful CONTRACTOR may not cancel any contract derived from this BID, without prior written consent of the OWNER.

Bid Form

TO: City of Los Banos
520 J Street
Los Banos, CA 93635

In compliance with the Invitation for Sealed Bids the undersigned, as BIDDER, hereby offers to provide to the OWNER, in accordance with the terms and conditions in the Provisions set forth in the CONTRACT DOCUMENTS the stated total bid amount quoted on this Bid Form for the WORK of

HENRY MILLER AREA STORM DRAIN AND L STREET WATERLINE

Total Bid Amount: \$ _____

(Total Bid Amount in Written Form)

The undersigned certifies under penalty of perjury under the laws of the State of California and the United States of America, that the above quotation constitutes a bona-fide offer for the WORK, that undersigned is a duly authorized representative of the company listed, that the quotation is in no way sham or collusive, and that the executed AGREEMENT between the CONTRACTOR and OWNER constitutes acceptance of CONTRACTOR'S total bid for the WORK stated in the CONTRACT DOCUMENTS. The undersigned has read the General Provisions, Special Provisions, and Technical Specifications in these CONTRACT DOCUMENTS. The undersigned further certifies, under penalty of perjury that the Non-Collusion Affidavit required by Title 23 United States Code, Section 112 and Public Contract Code Section 7106; and the Title 49 Code of Federal Regulations, Part 29 Debarment and Suspension Certification are true and correct.

The undersigned acknowledges receipt of the following addenda: _____

Signature: _____ Date: _____

Title: _____

Name of Business: _____

Doing business as: (*Circle One*): An Individual A Partnership A Corporation

Business Address: _____

Telephone No.: _____ Fax No.: _____

E-Mail Address: _____

License Number: _____ Class & Expiration Date: _____

Non-Collusion Affidavit
PUBLIC CONTRACT CODE 7106

In conformance with Title 23 United States Code Section 112 and Public Contract Code 7106 the bidder declares that the bid is not made in the interest of, or on behalf of, any undisclosed person, partnership, company, association, organization, or corporation; that the bid is genuine and not collusive or sham; that the bidder has not directly or indirectly induced or solicited any other bidder to put in a false or sham bid, and has not directly or indirectly colluded, conspired, connived, or agreed with any bidder or anyone else to put in a sham bid, or that anyone shall refrain from bidding; that the bidder has not in any manner, directly or indirectly, sought by agreement, communication, or conference with anyone to fix the bid price of the bidder or any other bidder, or to fix any overhead, profit, or cost element of the bid price, or of that of any other bidder, or to secure any advantage against the public body awarding the contract of anyone interested in the proposed contract; that all statements contained in the bid are true; and, further, that the bidder has not, directly or indirectly, submitted his or her bid price or any breakdown thereof, or the contents thereof, or divulged information or data relative thereto, or paid, and will not pay, any fee to any corporation, partnership, company association, organization, bid depository, or to any member or agent thereof to effectuate a collusive or sham bid.

Debarment and Suspension Certification

TITLE 49, CODE OF FEDERAL REGULATIONS, PART 29

The Contractor, under penalty of perjury, certifies that, except as noted below, he/she or any other person associated therewith in the capacity of OWNER, partner, director, officer, and manager:

- Is not currently under suspension, debarment, voluntary exclusion, or determination of ineligibility by any federal agency;
- Has not been suspended, debarred, voluntarily excluded or determined ineligible by any federal agency within the past 3 years;
- Does not have a proposed debarment pending; and
- Has not been indicted, convicted, or had a civil judgment rendered against it by a court of competent jurisdiction in any matter involving fraud or official misconduct within the past 3 years.

If there are any exceptions to this certification, insert the exceptions in the following space.

Exceptions will not necessarily result in denial of award, but will be considered in determining Contractor responsibility. For any exception noted above, indicate below to whom it applies, initiating agency, and dates of action.

Note: The above certifications are part of the BID. Signing this BID on the signature portion thereof shall also constitute signature of these Certifications.

**Bid Schedule
For
HENRY MILLER AREA STORM DRAIN AND L STREET WATERLINE**

BIDDER agrees to perform all the WORK described in the CONTRACT DOCUMENTS for the following unit and lump sum prices and understands that the quantity of WORK shown is approximate only. The schedule shall be completed by the BIDDER with the unit and lump sum prices entered in numerals. The extensions shall be made by the BIDDER. In case of discrepancy between the unit prices and the extension thereof, the unit price shall be considered as correct when evaluating BIDS.

ITEM NO.	ITEM	QUANTITY AND UNIT	UNIT PRICE	AMOUNT
L STREET WATERLINE				
1	Mobilization	1 LS	\$ _____	\$ _____
	<i>* (Item 1 Not to Exceed \$12,000.00)</i>			<i>* (See Note)</i>
2	Traffic Control	1 LS	\$ _____	\$ _____
	<i>** (Item 2 Not to Exceed \$18,000.00)</i>			<i>** (See Note)</i>
3	Furnish and Install 10" Waterline	3,325 LF	\$ _____	\$ _____
4	Furnish and Install 6" Waterline	40 LF	\$ _____	\$ _____
5	Furnish and Install 10" Water Valve	12 EA	\$ _____	\$ _____
6	Furnish and Install 6" Water Valve	15 EA	\$ _____	\$ _____
7	Furnish and Install 4" Water Valve	1 EA	\$ _____	\$ _____
8	Hot Taps	2 EA	\$ _____	\$ _____
9	Furnish & Install Fire Hydrant Assembly	4 EA	\$ _____	\$ _____
10	Transfer Existing Fire Hydrant Connection	2 EA	\$ _____	\$ _____
11	Transfer School Fire Service	1 EA	\$ _____	\$ _____
12	Transfer Existing Residential Water Service	18 EA	\$ _____	\$ _____
13	Remove and Re-Install Sign	1 EA	\$ _____	\$ _____
14	Furnish and Apply Thermoplastic Markings	1 LS	\$ _____	\$ _____
15	Construction Staking	1 LS	\$ _____	\$ _____

HENRY MILLER AREA STORM DRAIN

16	Mobilization	1	LS	\$	\$
	<i>*** (Item 16 Not to Exceed \$18,000.00)</i>				<i>*** (See Note)</i>
17	Traffic Control	1	LS	\$	\$
	<i>**** (Item 17 Not to Exceed \$23,000.00)</i>				<i>**** (See Note)</i>
18	Furnish and Install 36" Storm Drain Pipe	3,198	LF	\$	\$
19	Furnish and Install 18" Storm Drain Pipe	340	LF	\$	\$
21	Furnish and Install 12" Storm Drain Pipe	160	LF	\$	\$
22	Furnish and Install Storm Drain Manhole	11	EA	\$	\$
22	Construct Storm Drain Catch Basin	3	EA	\$	\$
23	Sheeting, Shoring, and Bracing	1	LS	\$	\$
24	Sewer Line Installation and Sewer Service Reconnections	1	LS	\$	\$
25	Water Main and Water Service Adjustments	1	LS	\$	\$
26	Furnish and Apply Thermoplastic and Paint Markings and Striping	1	LS	\$	\$
27	Construction Staking	1	LS	\$	\$
TOTAL:				\$	\$

Note: The representations made herein are made under penalty of perjury. Any information contained in the BID which is proven false shall be considered nonresponsive and this BID shall be rejected.

Bid Bond

We, _____

as CONTRACTOR, and _____

as Surety, jointly and severally, bind ourselves, our heirs, representatives, successors and assigns, as set forth herein, to the **City of Los Banos** (herein called "OWNER") for payment

of the penal sum of _____

_____ Dollars (\$_____),

lawful money of the United States. Contractor has submitted the accompanying Bid Proposal

for the construction of:

HENRY MILLER AREA STORM DRAIN AND L STREET WATERLINE

If the CONTRACTOR is awarded the contract and enters into a written Agreement, in the form prescribed by the OWNER, at the price designated by BID Proposal, and files a PAYMENT BOND and PERFORMANCE BOND with the OWNER, or substitute security in lieu thereof, in the time and manner specified by the OWNER, and carries all insurance in type and amount which conforms to the General Provisions, Special Provisions, and Technical Specifications in these CONTRACT DOCUMENTS and furnishes required certificates and endorsements thereof, then this obligation shall be null and void; otherwise it shall remain in full force and effect.

Forfeiture of this bond, or any deposit made in lieu thereof, shall not preclude the OWNER from seeking all other remedies provided by law to cover losses sustained as a result of the CONTRACTOR'S failure to do any of the foregoing.

CONTRACTOR and Surety agree that if the OWNER is required to engage the services of an attorney in connection with the enforcement of this bond, each shall pay OWNER'S reasonable attorney's fees incurred with or without suit.

Executed on _____, 20____

Contractor

(Seal if Corporation)

By: _____

Title _____

[SIGNATURE SHEET CONTINUES ONTO NEXT PAGE]

Any claims under this bond may be addressed to:

_____ (name and address of Surety)

_____ (name and address of Surety's agent for service of process in California, if different from above)

_____ (phone number of Surety's agent in California)

(Attach Acknowledgment)

Surety

By _____

(Attorney-in-Fact)

Notice: No substitution or revision to this bond form will be accepted. Sureties must be authorized to do business in and have an agent for service of process in California.

All bond forms must be acknowledged before a Notary Public by both the Contractor and the Surety. Attorneys-in-fact who sign bond forms must file with each bond a certified and effective dated copy of their power of attorney.

AGREEMENT

SAMPLE

Note: Particulars left blank in this sample will be filled with project specific information as outlined in these bid documents.

THIS AGREEMENT is dated as of the _____ day of _____ in the year 2015 by and between the **City of Los Banos, a California municipal corporation** ("OWNER") and _____ ("CONTRACTOR").

OWNER and CONTRACTOR, in consideration of the mutual covenants hereinafter set forth, agree as follows:

1. **WORK.** CONTRACTOR shall complete the WORK indicated in OWNER's Contract Documents entitled HENRY MILLER AREA STORM DRAIN AND L STREET WATERLINE.

The WORK is generally described as follows:

- Furnishing and installing approximately 3,365 linear feet of waterline and trench patch, installing 27 water valves, transferring 17 water services, replacing 4 fire hydrant assemblies, connecting to 2 existing fire hydrants, furnishing and installing approximately 3,500 linear feet of storm drain line and trench patch, constructing 14 manholes, constructing 3 catch basins, and installing sewer lateral reconnections in the City of Los Banos.
- CONTRACTOR shall furnish all of the material, supplies, tools, equipment, labor and other services necessary for the construction and completion of the WORK described herein.

2. **CONTRACT TIME.** The CONTRACTOR shall commence the WORK required by the CONTRACT DOCUMENTS within 10 calendar days after the date of the NOTICE TO PROCEED and will complete the same within the time period set forth in the BID, unless the period for completion is extended otherwise by the CONTRACT DOCUMENTS.

3. **LIQUIDATED DAMAGES.** OWNER and CONTRACTOR recognize that time is of the essence of this Agreement and that OWNER will suffer financial loss if the WORK is not completed within the time specified in Paragraph 3 herein, plus any extensions thereof allowed in accordance with Paragraph 21, Time for Completion and Liquidated Damages, of the General Provisions. The parties also recognize the delays, expense and difficulties involved in proving in a legal proceeding the actual loss suffered by OWNER if the WORK is not completed on time. Accordingly, instead of requiring any such proof, OWNER and CONTRACTOR agree that as liquidated damages for delay (but not as a penalty) CONTRACTOR shall pay OWNER Eight Hundred Dollars (\$ 800.00) for each day that passes after the time specified in Paragraph 3 herein.

4. **CONTRACT PRICE.** OWNER shall pay CONTRACTOR for completion of the WORK in accordance with the Contract Documents in current funds the amount set forth in the Bid schedule(s). The CONTRACTOR agrees to perform all of the WORK described in the CONTRACT DOCUMENTS for the unit and lump sum prices set forth in the Bid schedule(s).

5. **PAYMENT PROCEDURES.** CONTRACTOR shall submit Applications for Payment in accordance with Paragraph 24, Progress Estimates, of the General Provisions. Applications for Payment will be processed by OWNER as provided in the General Provisions.

6. CONTRACT DOCUMENTS. The Contract Documents which comprise the entire agreement between OWNER and CONTRACTOR concerning the WORK consist of this Agreement and the following attachments to this Agreement:

- (A) Advertisement For Bids
- (B) Information For Bidders
- (C) Bid
- (D) Bid Bond
- (E) Agreement
- (F) Payment Bond
- (G) Performance Bond
- (H) Notice Of Award
- (I) Notice To Proceed
- (J) Change Order
- (K) General Provisions
- (L) Special Provisions
- (M) Technical Specifications prepared or issued by The City of Los Banos entitled HENRY MILLER AREA STORM DRAIN AND L STREET WATERLINE, dated March, 2015.
- (N) Drawings prepared or issued by The City of Los Banos numbered C-101 through C-127.
- (O) Addenda
No. _____, dated _____ 2015
No. _____, dated _____ 2015

There are no Contract Documents other than those listed in this Paragraph 6. The Contract Documents may only be amended by Change Order as provided in Paragraph 19, Changes in the Work, of the General Provisions.

7. MISCELLANEOUS.

- A. Terms used in this Agreement which are defined in Paragraph 1 of the General Provisions will have the meanings indicated in the General Provisions.
- B. No assignment by a party hereto of any rights under or interests in the Contract Documents will be binding on another party hereto without the written consent of the party sought to be bound; and specifically but without limitation monies that may become due and monies that are due may not be assigned without such consent (except to the extent that the effect of this restriction may be limited by law), and unless specifically stated to the contrary in any written consent to an assignment, no assignment will release or discharge the assignor from any duty or responsibility under the Contract Documents.
- C. OWNER and CONTRACTOR each binds itself, its partners, successors, assigns and legal representatives to the other party hereto, its partners, successors, assigns and legal representatives in respect of all covenants, agreements and obligations contained in the Contract Documents.
- D. The Laws of the State of California shall govern this Agreement. Venue is Merced County. The provisions of this paragraph shall survive expiration or other termination of this Agreement regardless of the cause of such termination.
- E. All bids become property of the OWNER. All bids, including the accepted bid and any

subsequent contract become public records per the requirements of the California Government Code, Sections 6250-6270, "California Public Records Act". Proprietary material must be clearly marked as such. Pricing and service elements of the successful bid are not consider proprietary information. The OWNER will treat all information submitted in a bid as available for public inspection once the County has selected a contractor. If you believe that you have a legally justifiable basis under the California Public Records Act (Government Section 6250 et. seq.) for protecting the confidentiality of any information contained within your bid, you must identify any such information, together with the legal basis of your claim in your bid. In order for the OWNER to assess confidentiality of any such information on your behalf, you must request, execute and submit an OWNER-prepared written agreement to defend and indemnify the OWNER for any liability, costs, and expenses incurred in asserting such confidentiality as part of your bid. The final determination as to whether the OWNER will assert your claim of confidentiality on your behalf shall be sole discretion of the OWNER.

F. This Agreement shall not be interpreted in favor of any Party by virtue of said Party not having prepared this Agreement.

G. If any time period provided for in this Agreement ends on the day other than a Business Day, the time period shall be extended to the next Business Day.

IN WITNESS WHEREOF, OWNER and CONTRACTOR have caused this Agreement to be executed the day and year first above written.

Date

By: _____
Authorized Representative of OWNER

Title: _____

ATTEST:

Lucille L. Mallonee
City Clerk

APPROVED AS TO FORM:

William A. Vaughn
City Attorney

Date

By: _____
Authorized Representative of
CONTRACTOR

Title: _____

(Seal if Corporation)

(Attach Acknowledgement for Authorized Representative of Contractor)

Certificate of Contractor

I, _____
(Name)

certify that I am a/the _____
(Title)

designate sole proprietor, partner in partnership, or corporate officer with Contractor License

Number _____ in the entity named as CONTRACTOR in the foregoing

AGREEMENT. I hereby expressly certify that the name of the entity to which I am associated is

(Company Name)

that this entity is in good standing and has complied with all applicable laws and regulations, and

that I have been expressly authorized by the proper parties in this entity to execute the Agreement

on behalf of the above-named entity.

ATTEST:

Signature: _____

This form must be acknowledged before a Notary Public. The acknowledgement must be attached.

Payment Bond

We, _____

as CONTRACTOR, and _____

as Surety, jointly and severally, bind ourselves, our heirs, representatives, successors and

assigns, as set forth herein, to the **City of Los Banos** (herein called "OWNER") for payment

of the penal sum of _____

_____ Dollars (\$ _____),

lawful money of the United States. OWNER has awarded the Contract and entered into an

Agreement with the CONTRACTOR for the construction of:

HENRY MILLER AREA STORM DRAIN AND L STREET WATERLINE

If CONTRACTOR or any of his SUBCONTRACTORS fails to pay any of the persons named in Section 3181 of the California Civil Code, or amounts due under the Unemployment Insurance Code with respect to work or labor performed under the Contract or during the one-year guarantee period, or for any amounts required to be deducted, withheld, and paid over to the Franchise Tax Board from the wages of employees of the CONTRACTOR and his SUBCONTRACTORS pursuant to Section 13020 of the Unemployment Insurance Code, with respect to such work and labor, then Surety will pay the same in an amount not exceeding the sum specified above, and also will pay, in case suit is brought upon this bond, such reasonable attorney's fees as shall be fixed by the court.

This bond shall insure to the benefit of any of the persons named in Section 3181 of the California Civil Code, so as to give a right of action to them or their assigns in any suit brought upon this bond.

Surety agrees that no change, extension of time, alteration, or addition to the terms of the Contract, or the work to be performed, or the Provisions shall in any way affect its obligation on this bond, and it does hereby waive notice thereof.

CONTRACTOR and Surety agree that should OWNER become a party to any action on this bond that each will also pay OWNER's reasonable attorney's fees incurred therein in addition to the above sum.

[SIGNATURE SHEET BEGINS ON NEXT PAGE]

Executed in four original counterparts on: _____, 20____

Contractor

(Seal if Corporation)

By: _____

Title: _____

(Attach Acknowledgment of Authorized Representative of Contractor)

Any claims under this bond may be addressed to:

_____ (name and address of Surety)

_____ (name and address of Surety's agent for service of process in California, if different from above)

_____ (phone number of Surety's agent in California)

(Attach Acknowledgment)

Surety

By _____
(Attorney-in-Fact)

Notice: No substitution or revision to this bond form will be accepted. Sureties must be authorized to do business in and have an agent for service of process in California.

All bond forms must be acknowledged before a Notary Public by both the CONTRACTOR and the Surety. Attorneys-in-fact who sign bond forms must file with each bond a certified and effective dated copy of their power of attorney.

Performance Bond

We, _____

as CONTRACTOR, and _____

as Surety, jointly and severally, bind ourselves, our heirs, representatives, successors and assigns, as set forth herein, to the **City of Los Banos** (herein called "OWNER") for payment of the penal sum of _____

_____ Dollars (\$ _____),

lawful money of the United States. OWNER has awarded the Contract and entered into an Agreement with the CONTRACTOR for the construction of:

HENRY MILLER AREA STORM DRAIN AND L STREET WATERLINE

The condition of this obligation is such that if the CONTRACTOR shall in all things abide by and well and truly keep and perform the covenants, and agreements in the said CONTRACT Agreement, and any alteration thereof made as therein provided, on his part to be kept and performed at the time and in the manner therein specified, and shall faithfully fulfill the one-year guarantee of all materials and workmanship, and shall indemnify and save harmless the OWNER and the OWNER'S Representative, and their consultants, and each of their directors, officers, employees and agents, as therein stipulated, this obligation shall become null and void, otherwise, it shall be and remain in full force and effect.

The PERFORMANCE BOND shall remain in full effect during the one-year guaranty period following the completion of the WORK.

Surety agrees that no change, extension of time, alteration, or addition to the terms of the General Provisions, Special Provisions, and Technical Specifications in these CONTRACT DOCUMENTS shall in anyway affect its obligation in the bond, and it does hereby waive notice thereof.

CONTRACTOR and Surety agree that if the OWNER is required to engage the services of an attorney in connection with the enforcement of this bond, each shall pay OWNER'S reasonable attorney's fees incurred with or without suit, in addition to the above sum.

[SIGNATURE SHEET BEGINS ON NEXT PAGE]

Executed in four original counterparts on : _____, 20____

Contractor

(Seal if Corporation)

By: _____

Title: _____

(Attach Acknowledgment of Authorized Representative of Contractor)

Any claims under this bond may be addressed to:

_____ (name and address of Surety)

_____ (name and address of Surety's agent for service of process in California, if different from above)

_____ (phone number of Surety's agent in California)

(Attach Acknowledgment)

Surety

By _____
(Attorney-in-Fact)

Notice: No substitution or revision to this bond form will be accepted. Sureties must be authorized to do business in and have an agent for service of process in California.

All bond forms must be acknowledged before a Notary Public by both the Contractor and the Surety. Attorneys-in-fact who sign bond forms must file with each bond a certified and effective dated copy of their power of attorney.

Notice of Award

To: _____

Date: _____
Project: _____

The OWNER has considered the BID submitted by you for the above described WORK dated _____, 20_____.

You are hereby notified that your BID has been accepted for the unit and lump sum prices set forth in the BID Schedule totaling \$_____.

You are required by the Information for Bidders to execute the Agreement and furnish the required CONTRACTOR'S PERFORMANCE BOND and PAYMENT BOND within ten (10) calendar days for the date of this Notice to you.

If you fail to execute said Agreement and to furnish said BONDS within ten days from the date of this Notice, said OWNER will be entitled to consider all your rights arising out of the OWNER'S acceptance of your BID as abandoned and as a forfeiture of your BID BOND. The OWNER will be entitled to such other rights as may be granted by law.

You are required to return an acknowledged copy of this NOTICE OF AWARD to the OWNER.

OWNER

By _____

Title _____

ACCEPTANCE OF NOTICE

Receipt of the above NOTICE OF AWARD

is hereby acknowledged by

(Name of Contractor)

this _____ day of _____, 20_____

By _____

Title _____

Notice To Proceed

To: _____

Date: _____
Project: _____

You are hereby notified to commence WORK in accordance with the Agreement dated _____, 20_____, on or before _____20_____, and you are to complete the Work by _____, 20_____.

You are required to return an acknowledged copy of this NOTICE TO PROCEED to the OWNER.

OWNER

By _____

Title _____

ACCEPTANCE OF NOTICE
Receipt of the above NOTICE TO PROCEED
is hereby acknowledged by
(Name of Contractor)

this _____ day of _____, 20_____

By _____

Title _____

Change Order

Order No. _____

Date: _____

Agreement Date: _____

PROJECT: _____

OWNER: _____

CONTRACTOR: _____

The following changes are hereby made to the CONTRACT DOCUMENTS:

Justification:

Change to CONTRACT PRICE:

Original CONTRACT PRICE: \$ _____

Current CONTRACT PRICE adjusted by previous
CHANGE ORDER: \$ _____

The CONTRACT PRICE due to this CHANGE ORDER
will be (increased) (decreased) by: \$ _____

The new CONTRACT PRICE including this
CHANGE ORDER will be: \$ _____

Change to CONTRACT TIME:

The CONTRACT TIME will be (increased) (decreased)
by calendar days. _____

The date for completion of all WORK will be: _____

The undersigned hereby agrees to the above-described amendment of the Contract.

CONTRACTOR

OWNER

This Change Order shall become a part of the Contract Documents only upon signature of both parties.

General Provisions

1. Terms and Definitions

Wherever used in the Contract Documents, the following terms shall have the meanings indicated, which shall be applicable to both the singular and plural thereof:

Addenda - Written or graphic instruments issued prior to the execution of the Agreement which modify or interpret the Contract Documents, Drawings and Specifications, by additions, deletions, clarifications or corrections.

ANSI – American National Standards Institute, current designation as of the Bid date unless otherwise indicated.

ASME – American Society of Mechanical Engineers, current designation as of the Bid date unless otherwise indicated.

ASTM – American Society for Testing Materials, current designation as of the Bid date unless otherwise indicated.

AWWA – American Water Works Association, current designation as of the Bid date unless otherwise indicated.

Bid - The offer or proposal of the Bidder submitted on the prescribed form setting forth the prices for the Work to be performed.

Bidder - Any person, firm or corporation submitting a Bid for the Work.

Bonds - Bid, Performance and Payment Bonds and other instruments of security, furnished by the Contractor and his surety in accordance with the Contract Documents.

Change Order - A written order to the Contractor authorizing an addition, deletion or revision in the Work within the general scope of the Contract Documents, or authorizing an adjustment in the Contract Price or Contract Time.

Completion - That date as certified by the Engineer when the construction of the Project or a specified part thereof is sufficiently completed, in accordance with the Contract Documents, so that the Project or specified part can be utilized for the purposes for which it is intended.

Contract Documents - the **Contract**, including Advertisement for Bids, Information for Bidders, Bid, including Bid Representations and Certifications, Bid Bond, **Agreement**, Payment Bond, Performance Bond, Notice Of Award, Notice To Proceed, Change Order, General Conditions, Special Conditions, Specifications, Drawings, and Addenda.

Contract Price – The total monies payable to the Contractor under the terms and conditions of the Contract Documents.

Contract Time – The number of calendar days stated in the Contract Documents for the completion of the Work.

Contractor – The person, firm or corporation with whom the OWNER has executed the Agreement.

Drawings – The part of the Contract Documents which shows the characteristics and scope of the Work to be performed and which have been prepared or approved by the Engineer.

Engineer – City Engineer of the City of Los Banos, acting either directly or through properly authorized agents, such agents, acting within the scope of the particular duties entrusted to them.

Field Order – A written order effecting a change in the Work not involving an adjustment in the Contract Price or an extension of the Contract Time, issued by the Engineer to the Contractor during construction.

IEEE – Institute of Electrical and Electronics Engineers, current designation as of the Bid date unless otherwise indicated.

NEMA – National Electrical Manufacturers Association, current designation as of the Bid date unless

otherwise indicated.

Notice Of Award – The written notice of the acceptance of the Bid from the OWNER to the successful Bidder.

Notice To Proceed – Written communication issued by the OWNER to the Contractor authorizing him to proceed with the Work and establishing the date of commencement of the Work.

Owner – City of Los Banos.

Production Data – All illustrations, standard schedules, performance charts, instructions, brochures, diagrams and other information furnished by the Contractor to illustrate a material, product or system for some portion of the Work.

Project – The undertaking to be performed as provided in the Contract Documents.

REA – Rural Electrification Association, current designation as of the Bid date unless otherwise indicated.

Samples – Physical examples which illustrate materials, equipment or workmanship, and establish standards by which the Work will be judged.

Shop Drawings – All drawings, diagrams, schedules and other data which are specifically prepared for the Work by the Contractor, a SUBCONTRACTOR, manufacturer, supplier or distributor, to illustrate some portion of the Work.

Specifications – A part of the Contract Documents consisting of written descriptions of a technical nature of materials, equipment, construction systems, standards and workmanship.

Standards - City of Los Banos Standard Specifications, The Standard Specifications of the Department of Transportation of the State of California (Caltrans) dated 2010 and subsequent updates to that 2010 edition, and The Standard Plans of the Department of Transportation of the State of California (Caltrans) dated 2010 and subsequent updates to this 2010 edition.

Subcontractor – An individual, firm or corporation having a direct contract with the Contractor or with any other Subcontractor for the performance of a part of the WORK at the site.

Supplier – Any person or organization who supplies materials or equipment for the Work, including that fabricated to a special design, but who does not perform labor at the site.

Work – All labor necessary to produce the construction required by the Contract Documents, and all materials and equipment incorporated or to be incorporated in the Project.

Written Notice – Any notice to any party of the Agreement relative to any part of this Agreement in writing and considered delivered and the service thereof completed, when posted by certified or registered mail to the said party at his last given address, or delivered in person to said party or his authorized representative on the WORK.

2. Order of Precedence of Contract Documents

In resolving conflicts resulting from errors or discrepancies in any of the CONTRACT DOCUMENTS, the order of precedence shall be as follows:

1. Permits from other agencies as may be required by law
2. Change orders
3. Agreement
4. Addenda
5. Contractor's Bid (Bid Form)
6. Notice Inviting Bids
7. Instructions to Bidders
8. Supplementary General Conditions
9. General Conditions
10. Special Provisions
11. Drawings
12. Referenced Standard Specifications

If the conflicts cannot be resolved by the precedence prescribed above, the most stringent requirements shall prevail.

3. Venue

CONTRACTOR, and any Subcontractor, Supplier and any other person or organization performing any part of WORK, agree that each of them will waive jurisdiction and venue and shall submit to the jurisdiction of the courts of the State of California in the County of Merced, regardless of residence or domicile, with respect to any actions or suits at law or in equity arising under or related to the bidding, award or performance of the WORK or with regard to any matter whatsoever arising out of or relating to the validity, construction, interpretation or reinforcement of the AGREEMENT as against OWNER or any of their consultants, and/or any of their respective directors, officers, employees, representatives or agents.

4. Giving Notice

Whenever any provision of the CONTRACT DOCUMENTS requires the giving of written notice, it will be deemed to have been validly given if delivered in person to the individual or to a member of the firm or to an officer of the corporation for whom it is intended, or if delivered at or sent by registered or certified mail, postage prepaid, to the last business address known to the giver of the notice.

5. Cumulative Remedies

The duties and obligations imposed by these General Provisions and the rights and remedies available hereunder to the parties hereto, and, in particular but without limitation, the warranties, guarantees and obligations imposed upon CONTRACTOR by the General Provisions and all of the rights and remedies available to OWNER thereunder are in addition to, and are not to be construed in any way as a limitation of, any rights and remedies available to any or all of them which are otherwise imposed or available by laws or regulations, by special warranty or guarantee or by other provisions of the CONTRACT DOCUMENTS, and the provisions of this paragraph will be as effective as if repeated specifically in the CONTRACT DOCUMENTS in connection with each particular duty, obligation, right and remedy to which they apply.

6. Non-discrimination

During the performance of the PROJECT, CONTRACTOR and SUBCONTRACTORS shall not unlawfully discriminate against any employee or applicant for employment because of race, color, ancestry, religion, sex, national origin, marital status, age, medical condition (cancer related), physical handicap (including AIDS), or sexual orientation. Equal employment extends, but is not limited to recruitment, compensation, benefits, layoff, termination, and all other conditions of employment. CONTRACTOR and SUBCONTRACTORS shall ensure that the evaluation/treatment of their employees and applicants for employment are free of such discrimination. CONTRACTOR and Sub-contractors shall comply with the provisions of the Fair Employment and Housing Act (Government Code, Section 12900 et seq.) and the applicable regulations promulgated there under (California Administrative Code, Title 2, Section 7285.0 et seq.). The applicable regulations of the Fair Employment and Housing Commission implementing Government Code, Section 12900, set forth in Chapter 5 of Division 4 of Title 2 of the California Administrative Code and incorporated into this Contract Agreement by reference and made a part hereof as if set forth in full.

CONTRACTOR and any SUBCONTRACTORS shall give written notice of their obligations under this clause to labor organizations with which they have a collective bargaining or other agreement.

CONTRACTOR shall include the nondiscrimination and compliance provisions of the clause in all subcontracts to perform Work under the Contract.

CONTRACTOR shall grant access by representative of the Department of Fair Employment and Housing and the OWNER upon reasonable notice at any time during normal business hours, but in no case less than twenty-four (24) hours notice, to such of its books, records, accounts, other sources of information and its facilities as said OWNER shall require to ascertain compliance with this clause.

7. Non-discrimination of the Disabled

The OWNER will not aid or perpetuate discrimination against a qualified disabled individual by funding as an agency, organization, or person that discriminates on the basis of handicap in providing aid, benefit, or service to beneficiaries of the program or activity. The OWNER is committed to provide access to all OWNER services, programs, and meetings open to the public for people with disabilities. In this regard the OWNER and all of its vendors and CONTRACTOR will take all reasonable steps to ensure that disabled individuals have the maximum opportunity for the same level of aid, benefit, or service as any other individual.

8. Additional Instructions and Detail Drawings

The CONTRACTOR may be furnished additional instructions and detail drawings by the Engineer, as necessary to carry out the Work required by the CONTRACT DOCUMENTS. The additional drawings and instructions thus supplied will become a part of the CONTRACT DOCUMENTS. The CONTRACTOR shall carry out the Work in accordance with the additional detail drawings and instructions.

9. Schedules, Reports and Records

The CONTRACTOR shall submit to the OWNER such schedules, reports, records and other data as the OWNER may request concerning Work performed or to be performed.

Prior to the first partial payment estimate, the CONTRACTOR shall submit schedules showing the order in which he proposed to carry on the Work, including dates at which he will start the various parts of the Work, estimated date of completion of each part and, as applicable:

- A. A detailed cost breakdown of the WORK under each bid item awarded. The breakdown, after receiving favorable review by the ENGINEER, will become the basis for partial payment determination. Elements of WORK shall be grouped by building, structure, pipeline, system, etc. Within each grouping, work shall be itemized by readily measurable quantities of work completed in place. For example, concrete should be in units of cubic yard including form work and reinforcing steel. Mobilization costs, bond and insurance costs, and overhead costs shall not be prorated over items of WORK. In the event the

cost breakdown is not favorably reviewed by the ENGINEER, another cost breakdown shall be submitted that is mutually acceptable to the CONTRACTOR and the ENGINEER.

- B. The dates at which special detail drawings will be required; and respective dates for submission of SHOP DRAWINGS, the beginning of manufacture, the testing and the installation of materials, supplies and equipment. The CONTRACTOR shall also submit a schedule of payments that he anticipates he will earn during the course of the WORK.

10. Drawings and Specifications

The intent of the DRAWINGS and SPECIFICATIONS is that the CONTRACTOR shall furnish all labor, materials, tools, equipment, and transportation necessary to complete the PROJECT in an acceptable manner, ready for use, occupancy or operation by the OWNER.

In case of conflict between the DRAWINGS and SPECIFICATIONS, the SPECIFICATIONS shall govern. Figure dimensions on DRAWINGS shall govern over scale dimensions and detailed DRAWINGS shall govern over general DRAWINGS.

Any discrepancies found between the DRAWINGS and SPECIFICATIONS and site condition or any inconsistencies or ambiguities in the DRAWINGS or SPECIFICATIONS shall be immediately reported to the ENGINEER, in writing, who shall promptly correct such inconsistencies or ambiguities in writing. Work done by the CONTRACTOR after his discovery of such discrepancies, inconsistencies or ambiguities shall be done at the CONTRACTOR's risk.

The OWNER will furnish to the CONTRACTOR, free of charge, six copies of DRAWINGS and SPECIFICATIONS for the WORK. The CONTRACTOR shall keep one copy of all current DRAWINGS and SPECIFICATIONS on the job site, in good order, available to the ENGINEER and his representatives.

All DRAWINGS, SPECIFICATIONS, and copies thereof furnished by the OWNER are the property of the OWNER. They are not to be used on other work, and, with the exception of the signed Contract set, are to be returned to the OWNER on request, at the completion of the WORK.

11. Shop Drawings, Product Data and Samples

The CONTRACTOR shall review, approve and submit to the ENGINEER all SHOP DRAWINGS, PRODUCTION DATA and SAMPLES as may be necessary for prosecution of the WORK and as required by the CONTRACT DOCUMENTS. The CONTRACTOR shall review and approve all SHOP DRAWINGS, PRODUCTION DATA and SAMPLES prior to submitting them to the ENGINEER. By approving and submitting SHOP DRAWINGS, PRODUCTION DATA and SAMPLES, the CONTRACTOR represents that he has determined and verified all materials, measurements and criteria related thereto, and that he has checked and coordinated the information contained within such submittals with the requirements of the CONTRACT DOCUMENTS. Any SHOP DRAWING, PRODUCTION DATA or SAMPLE submitted to the ENGINEER without having been approved by the CONTRACTOR will be returned unreviewed to the CONTRACTOR.

For each item where SHOP DRAWINGS, PRODUCTION DATA or SAMPLES are required, the CONTRACTOR shall submit a minimum of six approved sets. The ENGINEER shall review all SHOP DRAWINGS, PRODUCTION DATA and SAMPLES and retain three sets after his review. The remaining sets shall be returned to the CONTRACTOR with actions defined as follows:

- A. NO EXCEPTIONS TAKEN – Accepted subject to its compatibility with future submissions and additional partial submissions for portions of the WORK not covered in this submission.
- B. MAKE CORRECTIONS NOTED – Same as NO EXCEPTIONS TAKEN except that minor corrections as noted shall be made by the CONTRACTOR.
- C. REVISE AND RESUBMIT – Rejected because of major inconsistencies or errors which shall be resolved by the CONTRACTOR prior to subsequent review by the Engineer.

- D. REJECTED – Submitted material does not conform to CONTRACT DOCUMENTS in major respect.

The ENGINEER'S review is only for general conformance with the design concept of the project and general compliance with the information given in the CONTRACT DOCUMENTS. It shall not include review of quantities, dimensions, weights or gauges, fabrications processes, construction methods, coordination with other trades, or construction safety precautions, all of which are the responsibility of the CONTRACTOR.

The ENGINEER shall not be responsible for any deviations from the CONTRACT DOCUMENTS not brought to the attention of the ENGINEER in writing by the CONTRACTOR and acknowledged in writing by the ENGINEER.

Portions of the WORK requiring SHOP DRAWINGS, PRODUCTION DATA and SAMPLES shall not begin until the submission has been favorably reviewed by the ENGINEER. A copy of each favorably reviewed SHOP DRAWING, PRODUCT DATA and SAMPLE shall be kept in good order by the CONTRACTOR at the site and shall be available to the ENGINEER.

12. Materials, Services and Facilities

It is understood that, except as otherwise specifically stated in the Contract Documents, the CONTRACTOR shall provide and pay for all materials, labor, tools, equipment, water, light, power, transportation, supervision, and all other services and facilities of any nature whatsoever necessary to execute, complete, and deliver the Work within the specified time.

Materials and equipment shall be so stored as to insure the preservation of their quality and fitness for the Work. Stored materials and equipment to be incorporated in the WORK shall be located so as to facilitate prompt inspection.

Manufactured articles, materials and equipment shall be applied, installed, connected, erected, used, cleaned and conditioned as directed by the manufacturer.

Materials, supplies and equipment shall be in accordance with samples submitted by the CONTRACTOR and reviewed by the Engineer.

Materials, supplies or equipment to be incorporated into the WORK shall not be purchased by the CONTRACTOR or any SUBCONTRACTOR subject to a chattel mortgage or under a conditional sale contract or other agreement by which an interest is retained by the seller.

13. Inspection and Testing

All materials and equipment used in the construction of the PROJECT shall be subject to adequate inspection and testing in accordance with generally accepted standards, as required and defined in the CONTRACT DOCUMENTS.

The CONTRACTOR shall provide, at his expense, the necessary testing and inspection services required by the CONTRACT DOCUMENTS, unless otherwise provided.

The OWNER shall provide all other inspections and testing services not required by the CONTRACT DOCUMENTS. If the CONTRACT DOCUMENTS, laws, ordinances, rules, regulations or orders of any public authority having jurisdiction specifically require any WORK to be inspected, tested, approved by someone other than the CONTRACTOR, the CONTRACTOR will give the ENGINEER timely notice of readiness. The CONTRACTOR will then furnish the ENGINEER the required certificates of inspection, testing or approval.

Neither observations by the ENGINEER, nor inspections, tests or approvals by persons other than the CONTRACTOR shall relieve the CONTRACTOR from his obligations to perform the WORK in accordance with the requirements of the CONTRACT DOCUMENTS.

The ENGINEER and his representatives will at all times have access to the WORK. In addition, authorized representatives and agents of the OWNER and appropriate Federal or State agencies shall be permitted to inspect all work, material, payrolls, records of personnel, invoices of materials, and other

relevant data and records. The CONTRACTOR will provide proper facilities for such access and observation of the WORK and also for any inspection or testing thereof.

If any WORK is covered contrary to the written request of the ENGINEER, it must, if requested by the ENGINEER be uncovered of his observation and replaced at the CONTRACTOR's expense.

If any WORK has been covered which the ENGINEER has not specifically requested to observe prior to it being covered, or if the ENGINEER considers it necessary or advisable that covered WORK be inspected or tested by others, the CONTRACTOR, at the ENGINEER'S request, will uncover expose or otherwise make available for observation, inspection or testing as the ENGINEER may require, that portion of the WORK in question, furnishing all necessary labor, materials, tools, and equipment. If it is found that such WORK is not found to be defective, the CONTRACTOR will be allowed an increase in the CONTRACT PRICE of an extension of the CONTRACT TIME, or both, directly attributable to such uncovering, exposure, observation, inspection, testing and reconstruction and an appropriate Change Order shall be issued.

14. Substitutions

Whenever a material, article or piece of equipment is identified on the DRAWINGS or SPECIFICATIONS by reference to brand name or catalogue number, it shall be understood that this is referenced for the purpose of defining the performance of other salient requirements and that other products of equal capacities, quality and function shall be considered. The CONTRACTOR may recommend the substitution of a material, article or piece of equipment of equal substance and function for those referred to in the CONTRACT DOCUMENTS by reference to brand name or catalogue number, and if, in the opinion of the ENGINEER, such material, article, or piece of equipment is of equal substance and function to that specified, the ENGINEER may approve its substitution and use by the CONTRACTOR. The CONTRACTOR warrants that if substitutes are approved, no major changes in the function or general design of the PROJECT will result. Incidental changes or extra component parts required to accommodate the substitute will be made by the CONTRACTOR without a change in the CONTRACT PRICE or CONTRACT TIME.

15. Patents

The CONTRACTOR shall pay all applicable royalties and license fees. He shall defend all suits or claims for infringement of any patent rights and save the OWNER harmless from loss on account thereof, except that the OWNER shall be responsible for any such loss when a particular process, design, or the product of a particular manufacturer or manufacturers is specified, but if the CONTRACTOR has reason to believe that the design, process or product specified is an infringement of a patent, he shall be responsible for such loss unless he promptly gives such information to the ENGINEER.

16. Surveys, Permits and Regulations

The CONTRACTOR will furnish lines and grades as required for the construction of the WORK. The CONTRACTOR shall make a general check of all lines, dimensions and elevations and shall make all necessary rechecks during the progress of the WORK to avoid errors in construction. The CONTRACTOR shall be responsible for proper dimensions and fittings of all items of WORK being performed by him. Should any discrepancy be found in lines, dimensions or elevations, they shall be reported to the ENGINEER immediately. Staking shall be bid, measured and paid on a per-lump-sum basis.

The CONTRACTOR shall protect all existing property and survey monuments, including survey control monuments for this WORK. Where it is necessary to disturb existing property, survey of control monuments in order to permit the prosecution to the WORK within the permanent and construction of right-of-way, such monuments shall be reset by the OWNER. Such monuments shall not be disturbed during the prosecution of the WORK unless the CONTRACTOR has given the OWNER a minimum of 72 hours notice of the CONTRACTOR'S intent to disturb such monuments during the prosecution of his WORK.

The CONTRACTOR shall carefully preserve benchmarks, reference points and stakes and, in case of

willful or careless destruction, he shall be charged with the resulting expense and shall be responsible for any mistakes that may be caused by their unnecessary loss or disturbance.

Permits and licenses of a temporary nature necessary for the prosecution of the WORK shall be secured and paid for by the CONTRACTOR. Permits, licenses and easements for permanent structures or permanent changes in existing facilities shall be secured and paid for by the OWNER, unless otherwise specified. The CONTRACTOR shall give all notices and comply with all laws, ordinances, rules and regulations bearing on the conduct of the WORK as drawn and specified. If the CONTRACTOR observes that the CONTRACT DOCUMENTS are at variance therewith, he shall promptly notify the ENGINEER in writing, and any necessary changes shall be adjusted as provided in Paragraph 19 of these General Provisions, Changes in the Work.

17. Protection of Work, Property and Persons

The CONTRACTOR shall be responsible for initiating, maintaining and supervising all safety precautions and programs in connection with the WORK. He will take all necessary precautions for the safety of, and shall provide the necessary protection to prevent damage, injury or loss to all employees on the WORK and other persons who may be affected thereby, all the WORK and all materials or equipment to be incorporated therein, whether in storage on or off the site, and other property at the site or adjacent thereto, including trees, shrubs, pavements, roadways, structures and utilities not designated for removal, relocation or replacement in the course of construction.

The CONTRACTOR shall comply with all applicable laws, ordinances, rules, regulations and orders of any public body having jurisdiction. He shall erect and maintain, as required by the conditions and progress of the WORK, all necessary safeguards for safety and protection. He shall notify owners of adjacent utilities when prosecution of the WORK may affect them. The CONTRACTOR shall remedy all damages, injury or loss to any property caused, directly or indirectly, in whole or in part, by the CONTRACTOR, any SUBCONTRACTOR or anyone directly or indirectly employed by any of them or anyone for whose acts any of them may be liable, except damage or loss attributable to the fault of the CONTRACT DOCUMENTS or to the acts or omissions of the OWNER or the ENGINEER or anyone employed by either of them or anyone for whose acts either of them may be liable, and not attributable, directly or indirectly, in whole or in part, to the fault or negligence of the CONTRACTOR.

In emergencies affecting the safety of persons or the WORK or property at the site or adjacent thereto, the CONTRACTOR, without special instruction or authorization from the ENGINEER or OWNER, shall act to prevent threatened damage, injury or loss. He will give the ENGINEER prompt WRITTEN NOTICE of any significant changes in the WORK or deviations from the CONTRACT DOCUMENTS caused thereby, and a CHANGE ORDER shall thereupon be issued covering the changes and deviations involved.

18. Supervision by Contractor

The CONTRACTOR shall supervise and direct the WORK. He shall be solely responsible for the means, methods, techniques, sequences and procedures of construction. The CONTRACTOR shall employ and maintain on the WORK, a qualified supervisor or superintendent who shall have been designated in writing by the CONTRACTOR as the CONTRACTOR'S representative at the site. The supervisor shall be present on the site at all times as required to perform adequate supervision and coordination of the WORK.

19. Changes in the Wok

The OWNER may at any time, as the need arises, order changes within the scope of the WORK without invalidating the AGREEMENT. If such changes increase or decrease the amount due under the CONTRACT DOCUMENTS, or in the time required for performance of the WORK, an equitable adjustment shall be authorized by written CHANGE ORDER.

The ENGINEER may also, at any time, by issuing a FIELD ORDER, make changes in the details of the WORK. The CONTRACTOR shall proceed with the performance of any changes in the WORK so ordered by the ENGINEER unless the CONTRACTOR believes that such FIELD ORDER entitles him to

a change in CONTRACT PRICE or CONTRACT TIME, or both, in which event he shall give the ENGINEER WRITTEN NOTICE thereof within seven (7) days after the receipt of the ordered change, and the CONTRACTOR shall not execute such changes pending the receipt of an executed CHANGE ORDER or further instruction from the OWNER.

20. Changes in Contract Price

The CONTRACT PRICE may be changed only by a CHANGE ORDER. The value of any WORK covered by a CHANGE ORDER or of any claim for increase or decrease in the CONTRACT PRICE shall be determined by one or more of the following methods in the order of precedence listed below:

- A. Unit prices previously approved.
- B. An agreed lump sum.
- C. If a lump sum or unit price cannot be mutually agreed upon, the CONTRACTOR shall be entitled to the sum of the following costs of doing the extra work:
 1. Direct Labor Costs. Charges for cost of all the labor furnished and used by the CONTRACTOR shall be made for manual classifications up to and including general foreman. It will not include charges for Assistant Superintendents, Superintendents, Office Personnel, Timekeepers, and Maintenance and Mechanics. The time charged to extra work shall be subject to the daily approval of the ENGINEER and evidence of such daily approval shall be submitted with the billing. Labor rates used to calculate the costs shall be those so designated in the Advertisement for Bids. No time or charges will be allowed, except when the men are actually engaged in the proper, efficient, and diligent performance or completion of the extra work as authorized. Overtime shall not be worked without prior approval by the ENGINEER.
 2. Equipment Costs. Charges for the rental and operation of the equipment furnished and used by the CONTRACTOR shall be made for all prime construction and automotive equipment. It will not include charges for equipment or tools with a new cost of \$1,000.00 or less. Equipment time charges must be subject to the daily approval submitted with the billing. The equipment rental and operation rates used shall be those agreed upon by the ENGINEER and the CONTRACTOR prior to commencement of the extra work. No time or charges will be allowed except when equipment is actually being used for the proper and efficient performance or completion of the extra work as authorized.
 3. Material Costs. Charges for the cost of materials furnished by the CONTRACTOR shall be made providing such furnishing was specifically authorized in the extra work order and the actual use verified by the ENGINEER. Charges must be net cost to the CONTRACTOR delivered at the job, and vendor's invoice must accompany the billing along with verification of use of such materials by the ENGINEER.
 4. Tools, Supplies, Overhead, Supervision and Profit. A charge for tools, supplies, overhead, supervision and profit will be allowed in the amount of 15% of the total Direct labor Costs, and Material Costs, as defined above.

Any extra work performed hereunder shall be subject to all of the provisions of the Contract and the CONTRACTOR'S sureties shall be bound with reference thereto as under the Contract.

21. Time for Completion and Liquidated Damages

The date of beginning and the time for completion of the WORK are essential conditions of the CONTRACT DOCUMENTS and the WORK embraced shall be commenced on a date specified in the NOTICE TO PROCEED.

Time is of the essence in this agreement. The CONTRACTOR shall proceed with the WORK at such a rate of progress to ensure full completion within the CONTRACT TIME. It is expressly understood and agreed, by and between the CONTRACTOR and the OWNER, that the CONTRACT TIME for the completion of the WORK described herein is a reasonable time.

The parties hereto agree that it is extremely difficult and impractical in this case to determine the actual damages the OWNER will suffer if the CONTRACTOR fails to complete the WORK within the CONTRACT TIME and for said reason, if the CONTRACTOR shall fail to complete the WORK within the CONTRACT TIME, or extension of time granted by the OWNER, then the CONTRACTOR will pay to the OWNER the amount for liquidated damages as specified in the AGREEMENT for each calendar day that the CONTRACTOR shall be in default after the time stipulated in the CONTRACT DOCUMENTS. The time for completion of the WORK shall be extended, and the CONTRACTOR shall not be charged with liquidated damages or any excess cost when the delay in completion of the WORK is due to the following, and the CONTRACTOR has promptly given WRITTEN NOTICE of such delay to the ENGINEER:

- A. To any preference, priority or allocation order duly issued by the OWNER.
- B. To unforeseeable caused beyond the control and without the fault or negligence of the CONTRACTOR, including but not restricted to, acts of God or of the public enemy, acts of the OWNER, acts of another CONTRACTOR in the performance of a contract with the OWNER, fires, floods, epidemics quarantine restrictions, strikes, freight embargoes, and climatic conditions which, in the opinion of the ENGINEER, make prosecution of the WORK unreasonably difficult.
- C. To any delays of SUBCONTRACTORS occasioned by any of the causes specified in the above paragraphs.

22. Correction of Work

The CONTRACTOR shall promptly remove from the premises all WORK rejected by the ENGINEER for failure to comply with the CONTRACT DOCUMENTS, whether incorporated in the construction or not, and the CONTRACTOR shall promptly replace and re-execute the WORK in accordance with the CONTRACT DOCUMENTS and without expense to the OWNER and shall bear the expense of making good all WORK of other contractors destroyed or damaged by such removal or replacement.

20. Suspension of Work, Termination and Delay

The OWNER may, at any time and without cause, suspend the WORK or any portion thereof for a period of not more than ninety days, or such further time as agreed upon by the CONTRACTOR, by WRITTEN NOTICE to the CONTRACTOR and the ENGINEER, which notice shall fix the date on which WORK shall be resumed. The CONTRACTOR will resume that WORK on the date so fixed. The CONTRACTOR will be allowed an increase in the CONTRACT PRICE or an extension of the CONTRACT TIME, or both, directly attributable to any such suspension.

If the CONTRACTOR is adjudged as bankrupt or insolvent, or if he makes a general assignment for the benefit of his creditors, or if a trustee or receiver is appointed for the CONTRACTOR or for any of his property, or if he files a petition to take advantage of any debtor's act or to reorganize under the bankruptcy or applicable laws, or if he repeatedly fails to supply sufficient skilled workmen or suitable materials or equipment, or if he fails to make prompt payments to SUBCONTRACTORS or for labor, materials or equipment or if he disregards laws, ordinances, rules, regulations or orders of any public body having jurisdiction over the WORK or if he disregards the authority of the ENGINEER, or if he otherwise violates any provision of the CONTRACT DOCUMENTS, then the OWNER may, without prejudice to any other right or remedy and after giving the CONTRACTOR and his surety a minimum of ten (10) days from delivery of a WRITTEN NOTICE, terminate the services of the CONTRACTOR, and finish the WORK by whatever method he may deem expedient. In such case the CONTRACTOR shall not be entitled to receive any further payment until the WORK is finished. If the unpaid balance, the CONTRACTOR shall pay the difference to the OWNER. Such costs incurred by the OWNER will be determined by the ENGINEER and incorporated in a CHANGE ORDER.

Where the CONTRACTOR'S services have been so terminated by the OWNER, said termination shall not affect any right of the OWNER against the CONTRACTORS then existing or which may thereafter accrue. Any retention or payment of monies by the OWNER due the CONTRACTOR will not release the CONTRACTOR from compliance with the CONTRACT DOCUMENTS.

After ten (10) days from delivery of a WRITTEN NOTICE to the CONTRACTOR and the ENGINEER, the OWNER may without cause and without prejudice to any other right or remedy, elect to abandon the PROJECT and terminate the CONTRACT. In such case, the CONTRACTOR shall be paid for all WORK executed and any expense sustained plus reasonable profit.

If, through an act or fault of the CONTRACTOR, the WORK is suspended for a period of more than ninety (90) days by the OWNER or under an order of court or other public authority, or the ENGINEER fails to act on any request for payment within thirty (30) days after it is submitted, or the OWNER fails to pay the CONTRACTOR substantially the sum approved by the ENGINEER or awarded by arbitrators within thirty (30) days of its approval and presentation, then the CONTRACTOR may, after the (10) days from delivery of a WRITTEN NOTICE to the OWNER and the ENGINEER stop the WORK until he has been paid all amounts then due, in which event and upon resumption of the WORK, CHANGE ORDERS shall be issued for adjusting the CONTRACT PRICE or extending the CONTRACT TIME or both to compensate for the costs and delays attributable to the stoppage of the WORK.

24. Progress Estimates

On or about the last day of the calendar month, the CONTRACTOR will, except as hereinafter provided, make in writing and certify to the OWNER an estimate which, in his opinion, is just and fair of the amount and value of the work completed by the CONTRACTOR up to that time in the performance of the Contract. In case of work for which unit prices are named in the Contract, the estimate shall be computed on the basis of said unit prices. In the case of work for which a lump sum is named in the Contract, the ENGINEER may use a breakdown of the lump sum price submitted by the CONTRACTOR, provided that such breakdown is submitted within 15 calendar days after the execution of the Agreement in a form acceptable to the ENGINEER. No payment will be made to the CONTRACTOR until such schedule has been submitted to and reviewed by the Engineer. To the figure thus arrived at shall be added any amounts due the CONTRACTOR for extra work and the amount of any approved claims for extra costs to the date of the Progress Estimate the retained percentage hereinafter provided for shall be deducted from the total thus computed; and from the remainder, there shall be further deducted any amounts due the OWNER from the CONTRACTOR for supplies or materials furnished or services rendered and any other amounts that may be due the OWNER under the terms of the Contract. In preparing estimates for partial payment, consideration shall be given to delivery on the site of pipe, and fittings which will become a part of the finished construction work and for which payment in full has been made by the CONTRACTOR, but no consideration will be given to preparatory work done or other materials on hand. From the balance thus determined shall be deducted the amount of all previous payments and the remainder shall constitute the partial estimate for that month. Such partial estimates shall not be required to be made by strict measurement, but may be made by measurement or by estimation or partly by one method and partly by the other and it shall be sufficient if they are approximate only. Partial estimates may be withheld or reduced if, in the opinion of the ENGINEER, the CONTRACTOR is not diligently and efficiently endeavoring to comply with the intent of the Contract.

25. Progress Payments

The OWNER will make payments on account of the Contract as follows: Not later than the 30th day of the month following the month in which the Contract is awarded, and the 30th day of each calendar month thereafter, the OWNER will pay to the CONTRACTOR 95% of the amount earned by the CONTRACTOR during the preceding month at the rate of prices set forth in the Contract, based on the estimate of the ENGINEER.

The retention will be held by the OWNER until 35 days following filing of the Notice of Completion.

26. Prompt Payment

The CONTRACTOR shall promptly pay all SUBCONTRACTORS and suppliers within ten (10) days of receipt of any progress payment, final payment or retention paid by the OWNER to the CONTRACTOR. CONTRACTOR shall advise all SUBCONTRACTORS and suppliers that all second-tier

SUBCONTRACTORS and suppliers must be paid within then (10) days of their receipt of payment from the CONTRACTOR.

27. Acceptance and Final Payment

Upon receipt of WRITTEN NOTICE from the CONTRACTOR that the WORK is ready for final inspection and acceptance, the ENGINEER will promptly make such inspection, and when he finds the WORK acceptable under the Contract, and the Contract fully performed, he will promptly issue a final certificate, over his own signature, stating that the WORK required by this Contract has been completed. The OWNER then shall issue a formal Notice of Completion, and the entire balance found to be due shall be paid to the CONTRACTOR by the OWNER 35 days from the date of recording by the OWNER of the Notice of Completion of all Work covered by this Contract.

Before issuance of the Notice of Completion, the CONTRACTOR shall submit evidence satisfactory to the OWNER that all payrolls, material bills, and other indebtedness connected with the WORK have been paid, or if not paid, then the CONTRACTOR shall submit evidence of the status of any unpaid indebtedness.

The making and acceptance of the final payment shall constitute a waiver of all claims by the OWNER except the following:

- A. those arising from unsettled liens;
- B. those arising from faulty work appearing within 12 months after the date of filing of the Notice of Completion;
- C. those arising from failure to meet the requirements of the CONTRACT DOCUMENTS or the SPECIFICATIONS; or,
- D. those arising from manufacturers' guarantees.

The acceptance by CONTRACTOR of the final payment referred to in this paragraph 27 herein, shall be a release of OWNER from all claims of liability to CONTRACTOR for anything done or furnished for, or relating to, the WORK or for any act or neglect of OWNER or of any person relating to or affecting the WORK, except demands against OWNER for the remainder, if any, of the amounts kept or retained under the provisions of Paragraph 25, Progress Payments, herein; and excepting pending, unresolved claims.

28. Quantities and Unit Prices

The quantities noted in the schedule are approximation for comparing BIDS, and no claim shall be made against the OWNER for excess or deficiency therein. Payment at the unit prices set forth in the schedule will constitute payment in full for the completed WORK and will include materials, supplies, labor, tools, machinery, and all other expenditures incident to satisfactory compliance with the Contract, unless otherwise specifically provided.

The quantities of WORK performed will be computed for payment by the ENGINEER on the basis of measurements taken by the ENGINEER, and these measurements shall be final and binding.

29. Insurance

The CONTRACTOR shall not commence Work under this Contract Agreement until he has obtained all the insurance required under this section and such insurance has been approved by the OWNER, nor shall the CONTRACTOR allow any SUBCONTRACTOR to commence Work on his subcontract until the insurance required of the SUBCONTRACTOR has been so obtained and approved. All insurance required under this section shall be maintained at the expense of the CONTRACTOR continuously during the life of the Contract up to the date of acceptance of the Work by the OWNER.

Commercial General Liability and Automobile Liability Insurance – The CONTRACTOR shall provide and maintain the following commercial general liability and automobile liability insurance:

- A. Coverage – Coverage for commercial general liability and automobile liability insurance

shall be at least as broad as the following:

1. Insurance Services Office Commercial General Liability coverage (Occurrence Form CG 0001)
 2. Insurance Service Office Form Number CA 0001 (ed. 1/87) covering Automobile Liability, Code 1 (any auto)
- B. Limits – The CONTRACTOR shall maintain limits no less than the following:
1. General Liability – Two million dollars (\$2,000,000) per occurrence for bodily injury, personal injury and property damage. If Commercial General Liability Insurance or other form with a general aggregate limit is used, either the general aggregate limit shall apply separately to the project/location (with the ISO CG 2501 or insurer's equivalent endorsement provided to the OWNER) or the general aggregate limit shall be twice the required occurrence limit.
 2. Automobile Liability – One million dollars (\$1,000,000) per accident for bodily injury and property damage combine single limit.
- C. Required provisions – The general liability and automobile liability policies are to contain, to be endorsed to contain the following provisions:
1. The OWNER and its directors, officers, employees, agents and volunteers are to be covered as insured as respects: liability arising out of activities performed by or on behalf of the CONTRACTOR, products and completed operations of the CONTRACTOR, premises owned, occupied or used by the CONTRACTOR, or automobiles owned, leased, hired or borrowed by the CONTRACTOR. The coverage shall contain no special limitations on the scope of protection afforded to the OWNER and its directors, officers, employees, agents, and volunteers.
 2. For any claims related to this Work, the CONTRACTOR's insurance shall be the primary insurance as respects the OWNER and its directors, officers, employees, agents and volunteers. Any insurance, pooled coverage or self-insurance maintained by the OWNER and its directors, officers, employees, agents and volunteers shall not contribute to it.
 3. Any failure to comply with reporting or other provisions of the policies including breaches of warranties shall not affect coverage provided to the OWNER and their directors, officers, employees, agents and volunteers.
 4. The CONTRACTOR's insurance shall apply separately to each insured against whom claim is made or suit is brought, except with respect to the limits of the insurer's liability.
 5. Each insurance policy required by this clause shall be endorsed to state that coverage shall not be suspended, voided, canceled by either party, reduced in coverage or in limits except after thirty (30) days prior written notice by certified mail, return receipt requested, has been given to the OWNER.
- D. Deductibles and Self-Insured Retentions – Any deductible or self-insured retention must be declared to and approved by the OWNER. At the option of the OWNER, either the insurer shall reduce or eliminate such deductibles or self-insured retentions.
- E. Acceptability of Insurers – Insurance is to be placed with insurers having a current A.M. Best's rating of no less than A-: VII or equivalent.

Workers' Compensation and Employer's Liability Insurance – The CONTRACTOR and all SUBCONTRACTORS shall cover or insure under the applicable laws relating to workers' compensation insurance, all of their employees working on or about the construction site, regardless of whether such coverage or insurance is mandatory or merely elective under law, and the CONTRACTOR shall defend, protect and save harmless the OWNER and its directors, officers, employees, agents and volunteers from and against all claims, suits, and actions arising from any failure of the CONTRACTOR or any SUBCONTRACTOR to maintain such insurance. Before beginning Work, CONTRACTOR shall furnish to the OWNER satisfactory proof that CONTRACTOR has taken out for the period covered by the Work under this Contract, full compensation insurance for all persons employed directly by CONTRACTOR or through SUBCONTRACTORS in carrying out the Work contemplated under this Contract, all in accordance with the "Workers' Compensation and Insurance Act," Division IV of the Labor Code of the State of California and any Acts amendatory thereof.

The CONTRACTOR shall provide employer's liability insurance in the amount of, at least, \$1,000,000 per accident for bodily injury and disease.

The CONTRACTOR shall provide the OWNER with a certificate of Workers' Compensation and Employers liability insurance coverage.

In signing the Agreement, CONTRACTOR makes the following certification required by Section 1861 of the Labor Code:

"I am aware of the provisions of Section 3700 of the Labor Code which requires each employer to be insured against liability for workmen's compensation or to undertake self insurance in accordance with the provisions of that code, and I will comply with such provisions before commencing the performance of the Work of this Contract."

Evidences and Cancellation of Insurance – Prior to execution of the Agreement, the CONTRACTOR shall file with the OWNER evidence of insurance from an insurer or insurers certifying to the coverage of all insurance required herein. Such evidence shall include original copies of the ISO CG 2010 (or insurer's equivalent) signed by the insurer's representative and certificate of insurance (Accord Form 25-S or equivalent). All evidence of shall be certified by a properly authorized officer, agent or qualified representative of the insurer and shall certify the names of the insured, any additional primary insurers, where appropriate, the type and amount of the insurance, the location and operations to which the insurance applies, the expiration date, and that the insurer will give by certified mail, written notice to the OWNER at least thirty (30) days prior to the effective date of any cancellation, lapse or material change in the policy.

The CONTRACTOR shall, upon demand of the OWNER, deliver to the OWNER all such policy or policies of insurance and the receipts for payment of premiums thereon; and should the CONTRACTOR neglect to obtain and maintain in force any such insurance or deliver such policy or policies and receipts to the OWNER, then it shall be lawful for the OWNER to obtain and maintain such insurance, and the CONTRACTOR hereby appoints the OWNER the true and lawful attorney-in-fact to do all things necessary for this purpose. All money paid by the OWNER for insurance premiums under the provisions of this article shall be charged to the CONTRACTOR.

30. Contract Security

The CONTRACTOR shall, within ten (10) days after the receipt of the NOTICE OF AWARD, furnish the OWNER with a Performance Bond and a Payment Bond in penal sums equal to 100% of the CONTRACT PRICE, conditioned upon the performance by the CONTRACTOR of all undertakings, covenants, terms, conditions and agreements of the CONTRACT DOCUMENTS, and upon the prompt payment by the CONTRACTOR to all persons supplying labor and materials in the prosecution of the WORK provided by the CONTRACT DOCUMENTS. Such bonds shall be executed by the CONTRACTOR and corporate bonding company licensed to transact such business in the state in which the WORK is to be performed and named on the current list of "Surety Companies Acceptable Federal Bonds" as published in the Treasury Department Circular Number 570. The expense of these bonds shall be borne by the CONTRACTOR. If at any time a surety on any such bond is declared a bankrupt or

loses its right to do business in the state in which the WORK is to be performed or is removed from the list of Surety Companies accepted on Federal bonds, CONTRACTOR shall within ten (10) days after notice from the OWNER to do so, substitute an acceptable bond (or bonds) in such form and sum and signed by such other surety or sureties as may be satisfactory to the OWNER. The premiums on such bond (s) shall be paid by CONTRACTOR. No further payments shall be deemed due nor shall be made until the new surety or sureties shall have furnished an acceptable bond to the OWNER.

Attached to the bonds shall be the original, or a certified copy, of the unrevoked appointment, power of attorney, bylaws or other instrument which entitles and authorizes the person to execute the bond to do so, a certified copy of the certificate of authority or the insurer issued by the Insurance Commissioner of the county in which the OWNER is located which would state that the certificate of authority of the insurer (the bonding company) has not been surrendered, revoked, cancelled, annulled, or suspended.

The Performance Bond shall remain in full force and effect during the Guaranty period of 12 months from the date of acceptance of the work by the OWNER.

If requested by the OWNER or ENGINEER, copies of the insurer's most recent annual statement and quarterly statement filed with the Department of Insurance pursuant to Article 10 (commencing with Section 900) of Chapter 1 of Part 2 of Division 1 of the Insurance Code, shall be provided to the OWNER or ENGINEER within 10 calendar days of the insurer's receipt of the request to submit the statements.

31. Assignments

Neither the CONTRACTOR nor the OWNER shall sell, transfer, assign or otherwise dispose of the Contract or any portion thereof, or of his right, title or interest therein, or his obligation thereunder, without written consent of the other party.

32. Indemnification

CONTRACTOR shall indemnify and hold harmless and defend the OWNER and the ENGINEER and their directors, officers, employees, agents or volunteers, and each of them from and against:

- A. Any and all claims, demands, causes of action, damages, costs, expenses, losses or liabilities, in law or in equity, of every kind and nature whatsoever for, but not limited to, injury to or death of any person including OWNER and/or ENGINEER and/or CONTRACTOR, or any directors, officers, employees, agents volunteers of the OWNER, ENGINEER or CONTRACTOR, and damages to or destruction of property of any person, including but not limited to, OWNER, ENGINEER and/or CONTRACTOR and their directors, officers, employees, agents or volunteers arising out of or in any manner directly or indirectly connected with the work to be performed under this agreement, however caused regardless of any negligence of the OWNER of the ENGINEER of their directors, officers, employees, agents, or volunteers, except the sole negligence of willful misconduct or active negligence of the OWNER or the ENGINEER or their directors, officers, employees, agents or volunteers:
- B. Any and all actions, proceedings, damages, costs, expenses, penalties or liabilities in law or equity, of every kind or nature whatsoever, arising out of , resulting from or on account of the violation of any governmental law or regulation, compliance with which is the responsibility of CONTRACTOR.

CONTRACTOR shall defend, at CONTRACTOR'S own cost, expense and risk, any and all such aforesaid suits, actions or other legal proceedings of every kind that may be brought or instituted against the OWNER and the ENGINEER or their directors, officers, employees, agents or volunteers.

CONTRACTOR shall pay and satisfy any judgment, award or decree that may be rendered against the OWNER and their directors, officers, employees, agents, or volunteers in any such suit, action or other legal proceedings.

CONTRACTOR shall reimburse the OWNER and their directors, officers, employees, agents and/or volunteers, for any and all legal expenses and costs incurred by them in connection therewith or in

enforcing the indemnity herein provided.

CONTRACTOR agrees to carry insurance for this purpose as set out in the specifications. See Paragraph 29 of these General Provisions for insurance specifications and coverage. CONTRACTOR'S obligation to indemnify shall not be restricted to insurance proceeds, if any, received by the OWNER and the ENGINEER or their directors, officers, employees, agents and/or volunteers.

33. Separate Contracts

The OWNER reserves the right to let other contracts in connection with this PROJECT. The CONTRACTOR shall afford other contractors reasonable opportunity for the introduction and storage of their materials and the execution of their WORK, and shall properly connect and coordinate his WORK with theirs. If the proper execution or results of any part of the CONTRACTOR'S work depend upon the work of any other contractor, the CONTRACTOR shall inspect and promptly report to the ENGINEER any defects in such WORK that render it unsuitable for such proper execution and results.

The OWNER may perform additional WORK related to the PROJECT by himself, or he may let other contracts containing provisions similar to these. The CONTRACTOR will afford the CONTRACTORS who are parties to such contracts (or the OWNER, if he is performing the additional WORK himself), reasonable opportunity for the introduction and storage of materials and equipment and the execution of WORK, and shall properly connect and coordinate his WORK with theirs.

In the performance of additional WORK by other contractors or the OWNER is not noted in the CONTRACT DOCUMENTS prior to the execution of the Agreement, written notice thereof shall be given to the CONTRACTOR prior to starting any such additional WORK. If the CONTRACTOR believes that the performance of such additional expense or entitles him to an extension of the CONTRACT TIME, he may make a claim therefore as provided in Items 16 and 17 of these General Provisions.

34. Subcontracting

The CONTRACTOR may utilize the services of specialty SUBCONTRACTORS on those parts of the WORK which, under normal contracting practices, are performed by specialty SUBCONTRACTORS.

The CONTRACTOR shall be fully responsible to the OWNER for the acts and omissions of his SUBCONTRACTORS, and of persons either directly or indirectly employed by them, as he is of the acts and omissions of persons directly employed by him.

The CONTRACTOR shall cause appropriate provisions to be inserted in all contracts relative to the WORK to bind SUBCONTRACTORS to the CONTRACTOR by the terms of the CONTRACT DOCUMENTS in so far as applicable to the WORK of SUBCONTRACTORS and to give the CONTRACTOR the same power as regards terminating any subcontract that the OWNER may exercise over the CONTRACTOR under any provision of the CONTRACT DOCUMENTS.

Nothing contained in this CONTRACT shall create any contractual relation between any SUBCONTRACTOR and the OWNER.

CONTRACTOR shall include all SUBCONTRACTORS as insured under its policies or shall furnish separate certificates and endorsements for each SUBCONTRACTOR. All coverage for SUBCONTRACTORS shall be subject to all of the requirements stated herein.

35. Employment of Apprentices

The CONTRACTOR and any SUBCONTRACTOR under him shall comply with the requirements of Sections 1777.5 and 1777.6 of the Labor Code in the employment of apprentices. The responsibility for compliance with the provisions of said Section 1777.5 for all apprenticeship occupations shall rest with the CONTRACTOR. Information relative to apprenticeship standards, wage schedules and other requirements may be obtained from the Division of Apprenticeship Standards, 455 Golden Gate Avenue, San Francisco, California, or from its branch offices.

36. Payment of Prevailing Wages

The CONTRACTOR and all SUBCONTRACTORS under him shall pay all laborers, workmen and mechanics on all work included in this contract no less than the general prevailing rate of per diem wages for work performed, (to-wit, within the limits of the City), and no less than the general prevailing rate of per diem wages for legal holiday and overtime work in said locality, which per diem wages shall not be less than the stipulated rate contained in a schedule thereof which has been ascertained and determined by the Council to be the general prevailing rate of per diem wages for each craft or type of workman or mechanic needed to execute this contract, and which is now on file with the City Clerk, as set forth in the Notice to Bidders, and by reference it is incorporated herein and made a part hereof.

The CONTRACTOR shall forfeit, as a penalty to the OWNER, two hundred dollars (\$200.00) for each laborer, workman or mechanic employed for each calendar day or portion thereof such laborer, workman or mechanic is paid less than the said stipulated rates for any work done under this contract by him or by any SUBCONTRACTOR under him in violation of Articles 1 and 2 of Chapter 1 Part 7 of Division 11 of the Labor Code of the State of California, and said sums and amounts which shall have been so forfeited pursuant to the herein paragraph and the said terms of said Labor Code shall be withheld and retained from payments due to the CONTRACTOR under said contract, pursuant to this contract and the said terms of said Labor Code; but no sum shall be so withheld, retained or forfeited except from the final payment without a full investigation by either the Division of Labor Law Enforcement of the State Department of Industrial Relations or by said Council.

The difference between such stipulated prevailing wage rates and the amount paid to each workman for each calendar day, or a portion thereof, for which each workman was paid less than the stipulated prevailing wage rate shall be paid to each workman by the CONTRACTOR. The CONTRACTOR shall comply with the provisions of Section 1775 of the Labor Code of the State of California.

The CONTRACTOR and his SUBCONTRACTORS shall submit certified payroll information electronically to the Department of Industrial Relations as well as a hard copy of said certified payrolls to the OWNER on a monthly basis.

37. Registration to Train Apprentices

Pursuant to Labor Code Section 1777.5, all CONTRACTORS shall file with the appropriate Joint Apprenticeship Training Committee, a DAS-140 form registering to train apprentices. This requirement to register to train apprentices is mandated by Section 1777.5 whether or not you are signatory to or a party of any approved training program. Only those programs approved by the California Apprenticeship Council are applicable to accept DAS-140 registration forms.

If the CONTRACTOR is approved to train apprentices, then apprentices must be called in a ratio not less than one apprentice hour for each five journeyman hours.

However, if the entire contract may be completed within 20 working days or the entire contract (nor subcontracts) is less than thirty thousand (\$30,000), then the CONTRACTOR is exempt from requesting apprentices under Labor Code Section 1777.5.

In addition, all CONTRACTORS are required to make appropriate training contributions as set forth in the prevailing wage determination to each appropriate JATC, or in the alternative, to the California Apprenticeship Council. Payments shall be made not less than monthly, calculated and paid by the fifteenth of each month, for work performed that prior month.

The address for the applicable Joint Apprenticeship Training Committee and for the California Apprenticeship Council can be obtained by calling the Division of Apprenticeship Standards.

38. Penalties

Failure to pay the appropriate prevailing wage can result in penalties being assessed as follows:

- A. Up to \$50.00 per day per worker for each and every violation; and,

- B. debarment from future public works for a period not to exceed three years.
- C. \$50.00 per day per worker for each failure to comply with the payment of overtime for all hours worked in excess of 8 in one day or 40 in one week.

Failure to register to train apprentices or failure to pay the appropriate training contribution can result in penalties being assessed as follows:

- A. \$100.00 per day for each day of violation; and,
- B. debarment from future public works for a period not to exceed three years.

39. Engineers Authority

The ENGINEER shall act as the OWNER'S representative. He shall decide questions which may arise as to quality and acceptability of materials furnished and WORK performed. He shall interpret the intent of the CONTRACT DOCUMENTS in a fair and unbiased manner. The ENGINEER will make visits to the site and determine if the WORK is proceeding in accordance with the CONTRACT DOCUMENTS.

The CONTRACTOR will be held strictly to the intent of the CONTRACT DOCUMENTS in regard to the quality of materials, workmanship and execution of the WORK. Inspections may be made at the factory or fabrication plant of the source of material supply.

The ENGINEER will not be responsible for the construction means, controls, techniques, sequences, procedures, or construction safety.

40. Land and Rights-of-Way

Prior to issuance of the NOTICE TO PROCEED, the OWNER shall obtain all land and rights-of-way necessary for carrying out and for the completion of the WORK to be performed pursuant to the CONTRACT DOCUMENTS, unless otherwise mutually agreed.

The OWNER shall provide to the CONTRACTOR information which delineates and describes the lands owned and rights-of-way acquired.

The CONTRACTOR shall provide, at his own expense and without liability to the OWNER, any additional land and access thereto that the CONTRACTOR may desire for temporary construction facilities, or for storage of materials.

41. Warranty and Guarantee

CONTRACTOR warrants and guarantees to OWNER that all work will be in accordance with the Contract Documents and will not be defective. Prompt notice of defects known to OWNER shall be given to CONTRACTOR. All defective work, whether or not in place, may be rejected, corrected or accepted as provided in Paragraph 19, Changes in the Work, of these General Provisions. Defective work may be rejected even if approved by prior inspection.

42. One (1) Year Warranty Period

The warranty period shall commence when the Notice of Completion is issued, at notice of beneficial occupancy or at notice of partial utilization of the work to be warranted has been issued, or a later date if so specified in the AGREEMENT, or mutually agreed to, and extend until one (1) year after that date or whatever longer period may be prescribed by laws or regulations or by the terms of any applicable special guarantee or specific provision of the CONTRACT DOCUMENTS.

43. Correction of Defective Work

If within the designated warranty period, or such longer period as may be required by Laws or Regulations, the WORK, or any part of the WORK, is discovered to be defective, CONTRACTOR shall promptly, without an adjustment in CONTRACT PRICE and in accordance with OWNER's written instructions, either correct that defective WORK, or if it has been rejected by OWNER, remove it from the site and replace it with non-defective WORK. If circumstances warrant it, including but not limited to, in an

emergency, OWNER may have the defective WORK corrected or the rejected WORK removed and replaced. In that event, CONTRACTOR shall not be allowed to recover any associated costs, and he shall reimburse OWNER for all direct, indirect and consequential costs of OWNER, and OWNER shall be entitled to an appropriate decrease in CONTRACT PRICE, to withhold a set-off against amount recommended for payment, or make a claim on CONTRACTOR's bond if CONTRACTOR has been paid in full. Where defective WORK (and damage to other WORK resulting therefrom) has been corrected, removed or replaced during the warranty period, the one (1) year warranty period with respect to such WORK will be extended for an additional period of one (1) year after such correction or removal and replacement has been satisfactorily completed.

44. Early Completion

The one (1) year warranty period will not begin until the Notice of Completion is filed. If CONTRACTOR completes the WORK or portions thereof prior to this time, he shall preserve the equipment and/or facilities by developing and implementing a preventive maintenance program in compliance with manufacturer's recommendations to maintain the equipment and/or facilities unless OWNER has issued a notice of beneficial occupancy or notice of partial utilization for the warranted WORK. At start up, CONTRACTOR will be required to get his equipment and/or facilities ready to put into service.

45. Extended Warranties and Guarantees

OWNER may at its sole discretion extend the one (1) year warranty period up to twenty-four (24) months, in which case CONTRACTOR shall maintain the warranties and guarantees. If such extension of the one (1) year warranty period causes an increase in the cost of the warranties and guarantees provided by CONTRACTOR, an adjustment in Contract Price shall be made as provided by the CONTRACT DOCUMENTS.

46. Arbitration

With the prior approval of the OWNER and the CONTRACTOR, all claims, disputes and other matters in question arising out of, or relation to, the CONTRACT DOCUMENTS or the breach thereof, except for claims which have been waived by the making and acceptance of final payment as provided by Item 24 of these General Provisions, may be decided by arbitration in accordance with the Arbitration Rules of the American Arbitration Association. If entered into, the agreement to arbitrate shall be specifically enforceable under the prevailing arbitration law. The award rendered by the arbitrators shall be final, and judgment may be entered upon it in any court having jurisdiction thereof.

Notice of the request for arbitration shall be filed in writing with the other party to the CONTRACT DOCUMENTS and with the American Arbitration Association, and a copy shall be filed with the ENGINEER. The request for arbitration shall set forth specifically the dispute to be arbitrated. Acceptance by the other party of the request to arbitrate shall constitute the agreement to arbitrate and arbitration shall proceed forthwith. No legal proceedings other than to enforce arbitration shall be commenced on any issue covered by the arbitration agreement.

The CONTRACTOR shall carry on the WORK and maintain the progress schedule during any arbitration proceedings, unless otherwise mutually agreed in writing.

47. Taxes

The CONTRACTOR shall pay all sales, consumer, use and other similar taxes required by the law of the place where the WORK is performed.

48. Contractor's Understanding

It is understood and agreed that the CONTRACTOR has, by careful examination, satisfied himself as to the nature and extent of the WORK, the character, quality, and quantity of the materials to be encountered, the character of the equipment and facilities needed preliminary to and during the prosecution of the WORK, the general and local conditions, and all other matters which can in any way affect the WORK under this Contract. No verbal agreement or conversation with any officer, agent or

employee of the ENGINEER or the OWNER, either before or after the execution of this Agreement, shall affect or modify any of the terms or obligations herein contained.

49. Accidents

The CONTRACTOR shall provide, at the site, such equipment and medical facilities as are necessary to supply first-aid service to anyone who may be injured in connection with the WORK. The CONTRACTOR must promptly report in writing to the ENGINEER all accidents whatsoever arising out of, or in connection with the performance of the WORK, whether on or adjacent to the site which causes death, personal injury, or property damages, giving full details and statements of witnesses. In addition, if death or serious injuries or serious damages are caused, the accident shall be reported immediately by telephone or messenger to both the ENGINEER and the OWNER. If any claim is made by anyone against the CONTRACTOR or any SUBCONTRACTOR on account of any accident, the CONTRACTOR shall promptly report the facts in writing to the ENGINEER, giving full details of the claim.

50. Safety and Sanitation

The CONTRACTOR shall provide adequate safety and sanitation facilities according to State laws and local ordinances.

The CONTRACTOR will assume sole and complete responsibility for job site conditions during the course of construction of the project, including safety of all persons and equipment. This responsibility shall apply continuously and not be limited to normal working hours.

51. Climatic Conditions

The ENGINEER may order the CONTRACTOR to suspend any WORK that may be subject to damage by climatic conditions. The CONTRACTOR may suspend WORK if climatic conditions are such that the CONTRACTOR is unable to work. In such case, the CONTRACTOR, within seven days, shall request in writing a CHANGE ORDER to extend the CONTRACT TIME.

52. Officials Not To Benefit

No official of the OWNER shall receive any benefit that may arise by reason of this Contract.

53. Clean-Up

During the progress of the WORK, the CONTRACTOR shall maintain the site and related structures and equipment in a clean, orderly condition and free from unsightly accumulations of rubbish. Upon completion of the WORK, the CONTRACTOR shall remove from the vicinity of the WORK all plants, buildings, rubbish, unused materials, concrete forms, temporary bridging, and other like material, belonging to him or used under his direction during construction, and in the event of his failure to do so, the same may be removed by the OWNER after 10 calendar days notice to the CONTRACTOR at the expense of the CONTRACTOR, and his surety or sureties shall be liable therefore.

As part of the final clean-up, the CONTRACTOR shall dress up and grade the right-of-way to match existing ground surfaces, and shall remove therefrom all weeds and other growth. Where the construction has crossed yards or driveways, they shall be restored to a condition equivalent to the condition existing prior to the construction as determined by the ENGINEER.

No direct payment will be made to the CONTRACTOR for any clean-up work, but all compensation therefore shall be included in the prices bid in the schedule for the various items of work.

54. Notice To Owner

In the event this contract involves digging trenches or excavations that extend deeper than four feet below the surface, the CONTRACTOR shall promptly, and before the following conditions are disturbed, notify OWNER, in writing, of any:

- A. Material that the CONTRACTOR believes may be material that is hazardous waste, as

defined in Section 25117 of the Health Safety Code, that is required to be removed to a Class I, Class II, or Class III disposal site in accordance with provisions of existing law;

- B. Subsurface or latent physical conditions at the site differing from those indicated;
- C. Unknown physical conditions at the site of any unusual nature, different materially from those ordinarily encountered and generally recognized as inherent in work of the character provided for in the contract.

OWNER shall promptly investigate the conditions. If OWNER finds that the conditions do materially so differ, or do involve hazardous waste, and cause a decrease or increase in the CONTRACTOR'S cost of, or the time required for, performance of any part of the WORK, OWNER shall issue a CHANGE ORDER under the procedures described in the contract.

In the event a dispute arises between OWNER and CONTRACTOR whether the conditions materially differ, or involve hazardous waste, or cause a decrease or increase in the CONTRACTOR'S cost of, or time required for, performance of any part of the WORK, the CONTRACTOR, shall not be excused from any scheduled completion date provided for by the contract, but shall proceed with all WORK to be performed under the contract. The CONTRACTOR shall retain any and all rights provided either by contract or by law which pertain to the resolution of disputes and protests between CONTRACTOR and OWNER.

55. Payment of Withheld Funds

The OWNER shall retain 5% of each payment from CONTRACTOR and shall make prompt and regular incremental acceptances of portions, as determined by the OWNER, of the Contract Agreement Work, and pay retention to the CONTRACTOR based on these acceptances. The CONTRACTOR, or SUBCONTRACTOR, shall return all monies withheld in retention from a SUBCONTRACTOR within 30 days after receiving payment for Work satisfactorily completed and accepted including incremental acceptances of portions of the Contract Agreement Work by the OWNER. Federal law (49CFR26.29) requires that any delay or postponement of payment over 30 days may take place only for good cause and with the OWNER's prior written approval. Any violation of this provision shall subject the violating CONTRACTOR or SUBCONTRACTOR to the penalties, sanctions and other remedies specified in Section 7108.5 of the Business and Professions Code. These requirements shall not be construed to limit or impair any contractual, administrative, or judicial remedies otherwise available to the CONTRACTOR or SUBCONTRACTOR in the event of a dispute involving late payment or nonpayment by the CONTRACTOR, deficient subcontract performance, or noncompliance. When the Work is complete, the OWNER will issue a Notice of Completion to the County. The OWNER will pay all retention funds to the CONTRACTOR thirty-five (35) Days after Notice of Completion has been recorded.

56. Storm Water Pollution Prevention Measures

Storm Water Pollution Prevention Measures shall be performed in accordance with the provisions in Section 13-3, "Storm Water Pollution Prevention Plan," of the Standard Specifications.

A. GENERAL

In compliance with the State and Federal regulations regarding storm water management during construction, the CONTRACTOR shall not allow any debris, waste materials or pollutants, originating from the CONTRACTOR's operations, to enter the storm drainage system, which leads to contamination of local creeks and ponding basins.

The CONTRACTOR shall properly dispose of all wastes and excess materials in a legal manner to the satisfaction of the OWNER.

B. SELECTIVE BMPS FOR STORM WATER POLLUTION PREVENTION

As applicable to the project or directed by the Engineer, the CONTRACTOR shall implement any or all of the following Best Management Practices (BMPs):

1. Material Handling and Storage

a. Nonhazardous Materials

i. Designated Delivery and Storage Area

The CONTRACTOR shall propose areas in the vicinity of or within the project site or within the CONTRACTOR's staging site, which are suitable for material delivery and storage. To the maximum extent practicable, these areas shall be away from gutters, catch basins, drainage courses or creeks. The CONTRACTOR shall submit the proposed areas to and shall obtain the approval from the Engineer in writing prior to bringing in materials.

ii. Storage of Granular Materials

The CONTRACTOR shall store granular materials at least ten feet (10') away from any inlet or curb return and shall prevent the granular materials from entering the storm drain system, drainage courses or creeks. During wet weather or when rain is forecast within 24 hours, the CONTRACTOR shall cover granular materials with a tarpaulin and surround the material with sandbags or other approved heavy objects.

b. Hazardous Materials

i. Hazardous materials include, but are not limited to, petroleum products, antifreeze, paints, thinners, solvents, pesticides, herbicides and various other toxic chemicals.

ii. The CONTRACTOR shall propose, within the project site or the CONTRACTOR's staging site, an area that is suitable for hazardous material delivery and storage. To the maximum extent practicable, the area shall be away from inlets, gutters, drainage courses or creeks. The CONTRACTOR shall submit the proposed area to and shall obtain approval from the Engineer in writing prior to bringing in hazardous materials.

iii. The CONTRACTOR shall label and store all hazardous materials and hazardous wastes in accordance with secondary containment regulations, the City of Los Banos Hazardous Materials Storage Ordinance and all applicable Merced County, State and Federal laws and regulations.

iv. The CONTRACTOR shall keep all hazardous materials or waste in containers and fully covered to avoid contamination of storm runoff.

v. The CONTRACTOR shall keep an accurate, up-to-date inventory, including Materials Safety Data Sheets (MSDSs), of hazardous materials and hazardous wastes stored on-site to assist emergency response personnel in the event of a hazardous material incident.

2. Hazardous Material Usage

a. The CONTRACTOR shall follow all local, State and Federal policies, laws and regulations governing the use of hazardous materials.

b. The CONTRACTOR shall use only Category III pesticides for pest control. If Category III pesticides are unavailable, have been tried but proven ineffective, or when it is necessary to prevent a pest outbreak that poses an immediate threat to public health or significant economic loss, the City may consider allowing the use of Category II pesticides with a dose of up to LD50 (a dose that kills 50 percent of the targeted pest population in the laboratory)

provided that the risk to the applicator and impact to the environment can be justified. Use of Category I pesticides is prohibited.

c. Apply pesticides at the appropriate time to maximize their effectiveness and minimize the likelihood of discharging nondegraded pesticides into storm water system, drainage courses and creeks.

d. Mix only as much material as is necessary for treatment. Calibrate application equipment prior to and during use to ensure desired application rate. Do not mix or load pesticides adjacent to storm drain system, drainage courses or creeks.

e. The CONTRACTOR shall not overapply herbicides, pesticides or fertilizers and shall follow the manufacturer's instructions regarding uses, protective equipment, ventilation, flammability and mixing of chemicals. Over-application of a pesticide is a "label violation" subject to an enforcement action by the Merced County Agriculture Department.

f. When rain is forecast within 24 hours or during wet weather, the CONTRACTOR shall not apply chemicals in outside areas unless otherwise allowed by the Engineer in writing.

3. Integrated Pest Management Methods

The CONTRACTOR shall employ, in place of pesticides, integrated pest management methods including:

- a. No control
- b. Physical or mechanical methods
- c. Least toxic chemicals (insecticidal soaps and oil, etc.)

4. Vehicle and Equipment Cleaning, Maintenance and Fueling

a. Cleaning

The CONTRACTOR shall not clean or wash vehicles or equipment on-site or in the streets. If allowed by the Engineer in writing, cleaning and washing shall be performed in a designated and bermed area approved by the Engineer using water only. No soaps, solvents, degreasers, steam cleaning equipment or similar methods are permitted. The CONTRACTOR shall not allow wash water to flow into streets, gutters, storm drain system, drainage courses or creeks.

b. Maintenance and Fueling

i. The CONTRACTOR shall perform maintenance and fueling of vehicles or equipment in a designated, bermed area or over a drip pan that will prevent waste, leaks or spills from entering streets, gutters, storm drain system, drainage courses or creeks.

ii. The CONTRACTOR shall inspect all vehicles and equipment arriving on-site for leaking fluids and shall promptly repair leaking vehicles and equipment. Drip pans shall be used to catch leaks until repairs can be made. Shut-off valves on equipment must be working properly.

5. Spill Prevention and Control

a. If hazardous materials are used on the project, the CONTRACTOR shall keep a stockpile of spill clean-up materials, such as rags or absorbents, readily accessible on-site.

b. Above-ground storage tanks and their installations shall comply with

City, State and Federal requirements.

c. The CONTRACTOR shall immediately contain and prevent spills or leaks from entering storm drain system, drainage courses or creeks and shall properly clean up and dispose of the spills or leaks. The CONTRACTOR shall not wash the spills or leaks into streets, gutters, storm drain system, drainage courses or creeks and shall not bury the spills or leaks.

d. In case of a hazardous material spillage, the CONTRACTOR shall immediately call 911 and shall handle the spilled material in accordance with the requirements of 6, "Disposal of Hazardous Waste," below.

6. Disposal of Hazardous Waste

a. Unless the CONTRACTOR is a licensed hazardous waste handler, the CONTRACTOR shall contract with a licensed hazardous waste handler to remove and dispose of hazardous waste materials unless the waste quantities to be transported are below threshold limits for transportation as specified in the State and Federal regulations.

b. The CONTRACTOR shall arrange for regular hazardous waste collection to comply with limits for storage of hazardous waste.

c. The CONTRACTOR may dispose of dry, empty paint cans, buckets, paintbrushes, rollers, rags and drop cloths in the trash.

d. The CONTRACTOR shall dispose of hazardous waste at facilities authorized for treatment, storage and disposal of hazardous waste only.

7. Street Sweeping

At the end of each day or as directed by the Engineer, the CONTRACTOR shall sweep roadways of all debris and excess materials attributed to the CONTRACTOR's operations.

8. Water Usage

a. The CONTRACTOR shall use the least amount of water necessary for dust control and street sweeping operations.

b. The CONTRACTOR shall not use water to flush dust and debris down the street in place of street sweeping.

9. Dumpsters and Portable Sanitary Facilities

a. If dumpsters or portable sanitary facilities are used, they shall be stationed at least ten feet (10') away from storm drain facilities.

b. The CONTRACTOR shall arrange for regular waste collection to keep dumpsters and portable sanitary facilities from overflowing and shall regularly inspect these facilities for leaks. If a leak is discovered, the CONTRACTOR shall arrange for the repair or replacement of facilities that leak. The CONTRACTOR shall not wash the dumpsters or portable sanitary facilities on-site.

10. Earthwork

The CONTRACTOR shall maximize the control of erosion and sediment by using the Best Management Practices for erosion and sedimentation control described in the California Storm Water Best Management Practice Handbook—Construction Activity or ABAG Manual of Standards for Erosion and Sediment Control Measures.

11. Dewatering

- a. The CONTRACTOR shall route water through a control device, such as a sediment trap, sediment basin or Baker tank, to remove settleable solids prior to discharging the water into the storm drain system. Refer to the California Storm Water Management Practice Handbook for these sediment control measures.
- b. Approval of the control device shall be obtained in advance from the Engineer.
- c. Filtration of the water following the control device may be required on a case-by-case basis.
- d. If the Engineer determines that the dewatering operation would not generate an appreciable amount of settleable solids, the control device may be waived.

12. Saw Cutting

- a. During saw cutting or grinding operation, use as little water as possible.
- b. During saw cutting, the CONTRACTOR shall cover or barricade catch basins using filter fabric, straw bales, sandbags or fine gravel dams to keep slurry out of the storm drain system. When protecting a catch basin, the CONTRACTOR shall ensure that the entire opening of the catch basin is covered. Refer to California Storm Water Best Management Practice Handbook for these control measures.
- c. The CONTRACTOR shall shovel, absorb or vacuum saw cut slurry and pick up the waste as the work progresses prior to moving to the next location, as specified elsewhere in these specifications or as directed by the Engineer.
- d. If saw cut slurry enters catch basins, the CONTRACTOR shall, at the CONTRACTOR's cost, clean up the storm drain system immediately.

13. Concrete, Grout and Mortar Related Work

- a. Material Handling
 - i. The CONTRACTOR shall avoid mixing excess amounts of fresh concrete or cement mortar on-site.
 - ii. The CONTRACTOR shall store concrete, grout and mortar away from storm drain facilities or drainage courses and shall ensure that these materials do not enter the storm drain system.
- b. Washing of Concrete Truck and Tools
 - i. The CONTRACTOR shall not wash out concrete trucks or equipment into streets, gutters, storm drain system, drainage courses or creeks.
 - ii. The CONTRACTOR shall perform washing of concrete trucks and tools off-site or in a designated area on-site where the water will flow onto dirt or into a temporary pit in a dirt area. The CONTRACTOR shall let the water percolate into the soil and dispose of the hardened concrete in a trash container. If a suitable dirt area is not available, the CONTRACTOR shall collect the wash water and dispose of it off-site.

14. Asphalt Concrete Paving

- a. Project Site Management

- i. When rain is forecast within 24 hours or during wet weather, the Engineer may prevent the CONTRACTOR from paving.
- ii. The Engineer may direct the CONTRACTOR to protect drainage courses by using earth dike, straw wattle or sandbag to trap and filter sediment. Refer to California Storm Water Best Management Practice Handbook for these control measures.
- iii. The CONTRACTOR shall place drip pans or absorbent material under paving equipment when not in use.
- iv. The CONTRACTOR shall cover catch basins and manholes when paving or applying prime coat, tack coat, seal coat, fog seal or slurry seal.
- v. If the paving operation includes an on-site mixing plant, the CONTRACTOR shall comply with Merced County NPDES General Industrial Activities Storm Water Permit requirements.
- vi. The CONTRACTOR shall preheat, transfer or load hot bituminous material away from storm drain system, drainage courses or creeks.

b. Paving Waste Management

The CONTRACTOR shall not sweep or wash down excess sand (placed as part of a sand seal or to absorb excess oil) into streets, gutters, storm drain system or creeks but shall collect the sand and dispose of it off-site. The CONTRACTOR shall not wash fresh asphalt concrete pavement.

15. Painting

a. General

- i. The CONTRACTOR shall remove as much excess paint as possible from brushes, rollers and other tools before starting cleanup.
- ii. The CONTRACTOR shall conduct cleaning of painting equipment and tools in a designated area approved by the Engineer.
- iii. The CONTRACTOR shall not allow wash water from cleaning of painting equipment and tools into streets, gutters, storm drain system, drainage courses or creeks.

b. Water-Based Paint

To the maximum extent practicable, the CONTRACTOR shall dispose of wash water from water cleaning of brushes, rollers and other tools used in water-based painting work to the sanitary sewer or direct wash water onto dirt area and spade in.

c. Oil-Based Paint

The CONTRACTOR shall dispose of waste thinner and solvent and sludge from cleaning of brushes, rollers and other tools used in oil-based painting work as hazardous waste and the CONTRACTOR shall handle the waste as described in Section 6, "Disposal of Hazardous Waste," above. To the maximum extent practicable, the CONTRACTOR shall filter paint thinner and solvents for reuse.

16. Thermoplastic

- a. The CONTRACTOR shall transfer and load hot thermoplastic away from drainage systems or drainage courses or creeks.
- b. The CONTRACTOR shall sweep thermoplastic grindings into plastic bags. Yellow thermoplastic grindings may require special handling as they may contain

paint.

C. CONTRACTOR TRAINING AND AWARENESS

1. The CONTRACTOR shall train all employees and SUBCONTRACTORS on the storm water pollution prevention requirements contained in these specifications.
2. The CONTRACTOR shall inform SUBCONTRACTORS of the storm water pollution prevention contract requirements and include appropriate subcontract provisions to ensure that these requirements are met.
3. The CONTRACTOR shall post warning signs in areas treated with chemicals.

D. BMP IMPLEMENTATION

The CONTRACTOR shall be responsible throughout the duration of the construction period for installing and maintaining the applicable BMPs and for removing and legally disposing of temporary control measures. Unless otherwise directed by the Engineer or specified elsewhere in these specifications, the CONTRACTOR's responsibility for BMP implementation shall continue throughout any temporary suspension of work ordered in conformance with the provisions in Section 8-1.06, "Suspensions," of the Standard Specifications.

Throughout the rainy season, all soil-disturbed areas of the site shall be fully protected with soil stabilization and sediment control device approved by the Engineer at the end of the same day the soil is disturbed unless fair weather is predicted the next day and the protective measures are exempt by the Engineer. The CONTRACTOR shall monitor the weather forecast on a daily basis and inform the Engineer of the forecast. The National Weather Service forecast shall be used for this purpose. If precipitation is predicted for the following day, construction schedule shall be altered as required to install appropriate BMPs or to ensure that the already installed BMPs are in good operating condition prior to the onset of rain.

E. BMP MAINTENANCE

To ensure proper implementation and effectiveness of the BMPs, the CONTRACTOR shall regularly inspect and maintain the deployed BMPs throughout the construction site. The CONTRACTOR shall identify corrective actions and the time needed to address any deficient BMPs or reinstate any BMPs that have been discontinued. The CONTRACTOR shall keep written records of all BMP inspections, maintenance and corrective actions.

The frequency of the BMP inspection shall be as follows:

1. Prior to a forecast storm;
2. After any precipitation that causes runoff;
3. At 24-hour intervals during extended rain events; and
4. Routinely, at a minimum of once every week.

If the CONTRACTOR or the Engineer identifies a deficiency in the deployment or functioning of a BMP, the deficiency shall be corrected immediately. If requested by the CONTRACTOR and approved by the Engineer in writing, the deficiency may be corrected at a later time or date but the corrective action shall not be later than the onset of the subsequent rain event. The correction of deficient BMPs shall be at no additional cost to the City.

F. RESPONSIBILITIES, CONSEQUENCES, AND REMEDIES

1. Conformance with the provisions of this section or other requirements in various other sections of these specifications shall not relieve the CONTRACTOR from the CONTRACTOR's responsibilities as provided in various relevant articles of Section 7, "Legal Relations and Responsibilities to the Public," of the Standard Specifications, and as specified herein.
2. For purposes of this section, costs and liabilities include, but are not limited

to, fines, penalties and damages, whether assessed against the City or the CONTRACTOR, including those levied under the Federal Clean Water Act and the State Porter-Cologne Water Act.

3. If solid or liquid materials or waste, hazardous or otherwise, or pollutants originating from the CONTRACTOR's operation enter the storm drain system or water courses, the CONTRACTOR will be required to thoroughly clean up the affected storm drain facilities and water courses to the satisfaction of the Engineer. If the CONTRACTOR fails to clean up the affected facilities as required, the City will issue a stop-work order and take necessary actions to effect the cleanup of the affected facilities.
4. The CONTRACTOR shall be responsible for all costs, including fines, the City's cost of defense, the cost of cleanup by others ordered by the City, and liabilities imposed by law as a result of the CONTRACTOR's failure or negligence in complying with the requirements specified herein.
5. In accordance with the provisions of Section 7-1.05, "Indemnification," of the standard Specifications if the CONTRACTOR fails to accept or reject a tender of defense and indemnity within fifteen (15) calendar days, the City may, in addition to the remedies authorized by law, retain any sum due the CONTRACTOR until disposition has been made of all claims or suits for damages or until the CONTRACTOR accepts or rejects the tender of defense, whichever occurs first.

G. PAYMENT

Full compensation for storm water pollution control shall be considered as included in the payment for various other items of work and no additional compensation will be made therefore.

Special Provisions

1. Requirements

It is required that there be constructed and completed in accordance with the CONTRACT DOCUMENTS for "Construction of **HENRY MILLER AREA STORM DRAIN AND L STREET WATERLINE** " for the City of Los Banos, all WORK as described in these CONTRACT DOCUMENTS.

2. Description of Work

The principal components of the WORK to be performed under these CONTRACT DOCUMENTS include the following:

The major work consists of furnishing and installing approximately 3,365 linear feet of waterline and trench patch, installing 27 water valves, transferring 17 water services, replacing 4 fire hydrant assemblies, connecting to 2 existing fire hydrants, furnishing and installing approximately 3,500 linear feet of storm drain line and trench patch, constructing 14 manholes, constructing 3 catch basins, and installing sewer lateral reconnections in the City of Los Banos. **The time for completion is 55 working days.**

Any incidental WORK not described in the CONTRACT DOCUMENTS which is necessary to complete the WORK shall be furnished and installed as part of this CONTRACT at no additional cost to the OWNER. The WORK shall be complete and ready for service to the satisfaction of the OWNER. The CONTRACTOR shall have had the opportunity to inspect the site and observe actual working conditions during the mandatory pre-bid meeting.

3. Commencement, Prosecution and Completion of Work

The CONTRACTOR shall commence WORK and shall complete all of the WORK in accordance with the schedule and within the time stated in the BID. The capacity of the CONTRACTOR'S construction plant, sequence of operations, method of operations, and the forces employed shall at all times during the continuance of the Contract, be subject to the approval of the ENGINEER and shall be such as to ensure the completion of the WORK within the time specified.

4. Special Construction Requirements

Construction on L Street between Iowa Avenue and Illinois Avenue shall be completed during the time that the school is on summer break (June 8 through August 7, 2015).

5. Hours of Work

Construction work shall be completed between the hours of 7:00 a.m. and 9:00 p.m. Monday through Friday using normal construction practices. No WORK shall be performed on Saturday or Sunday. The CONTRACTOR may request to the OWNER to perform construction outside of these specified hours.

6. City Permits and Business Licenses

The CONTRACTOR will not need an Encroachment Permit from the Public Works Department prior to start of construction. The CONTRACTOR and all SUBCONTRACTORS working within the city limits of Los Banos shall apply for and have issued a Business License from the City of Los Banos (209-827-7000) prior to commencement of WORK.

7. Responsibility Regarding Existing Utilities and Private Property

The existence and location of public and private utilities indicated on the DRAWINGS are not guaranteed and any additional utilities and facilities not shown on the DRAWINGS shall be investigated and protected by the CONTRACTOR. The CONTRACTOR shall be held responsible for damage to and for maintenance and protection of existing pipelines, public utilities, drives, curbs and gutters, sidewalks, and fences. Excavation in the vicinity of existing public utility structures, underground electrical or telephone cable, oil or gas pipelines, and waterlines shall be carefully done by hand. The CONTRACTOR shall adequately

protect all adjoining property and structures from damage, whether within or without of the OWNER furnished rights-of-way, and shall be fully responsible for any damage to adjoining property and structures which may result from WORK done under this Contract. The CONTRACTOR shall use extreme care during construction to prevent damage from dust to crops and adjacent property. The CONTRACTOR shall sprinkle the areas where the passage of operation of vehicles and equipment creates a dust problem, or take other preventive measures as directed by the ENGINEER. The CONTRACTOR shall furnish all labor, equipment, materials and means required to control dust which is in any way a result of the CONTRACTOR'S operations.

The CONTRACTOR shall be responsible for all damage or injury which may result to any property, outside of the construction right-of-way or within the right-of-way where so noted, from the CONTRACTOR'S operations hereunder, or otherwise, from the performance of the Agreement by said CONTRACTOR or any of his SUBCONTRACTORS or employees.

The CONTRACTOR shall attempt to maintain access to the residential and commercial driveways within the construction area at all times during working hours and shall provide access during non-working hours, weekends and holidays.

Payment for all WORK specified above shall be included in the unit or lump sum prices bid in the schedule for the various items of WORK.

8. Obstructions

The CONTRACTOR shall notify the ENGINEER and the appropriate regional notification center for operators of subsurface installations at least 3 working days, but not more than 14 calendar days, prior to performing any excavation or other work close to any underground pipeline, conduit, duct, wire or other structure. Failure to contact the notification center prohibits excavation. Regional notification centers include but are not limited to the following:

<u>NOTIFICATION CENTER</u>	<u>TELEPHONE</u>
Underground Service Alert Northern California (USA) www.usanorth811.org	811 or 1-800-642-2444 or 1-800-227-2600
Underground Service Alert Southern California (USA) www.digalert.org	811 or 1-800-422-4133
South Shore Utility Coordinating Council (DIGS)	1-800-541-3447
Western Utilities Underground Alert, Inc.	1-800-424-3447

9. Materials Furnished By OWNER

No labor, material, or other facilities shall be provided by the OWNER unless otherwise indicated on the DRAWINGS or in the CONTRACT DOCUMENTS.

10. Materials Furnished By Contractor

Unless otherwise stipulated, the CONTRACTOR shall provide and pay for all materials, labor, water, tools, equipment, light, power, transportation, and other facilities necessary for the execution and completion of the WORK.

11. Schedule of Values, Material List and Substitutions

Prior to the commencement of WORK, and within 10 days following the signing of the Contract by the CITY and the CONTRACTOR, the CONTRACTOR shall submit 7 copies of a Schedule of Values for all lump

sum bid items in the Proposal and a *complete* list of equipment and materials to be furnished, including all substitutions proposed to the Engineer for approval. Partial or incomplete material lists will not be considered. No substitutions will be considered thereafter. Only one request for substitution will be considered on each item of material or equipment.

12. Request for Extension of Time

All extension of time requests shall be made in writing to the ENGINEER within seven (7) calendar days from the delay occurrence date. In the case of continuing cause of delay, only one claim is necessary.

13. Rights-of-Way

The CONTRACTOR shall not be entitled to extra compensation for hardships and increased cost caused by the WORK being adjacent to telephone-telegraph lines and guy wires, power lines and guy wires, buildings, fences, pipelines, ditches, roadways, and other obstacles which may physically restrict or limit the use of construction equipment. In some cases, such physical confinement may necessitate special methods of construction of the WORK. If the CONTRACTOR desires to utilize additional area, he shall obtain the necessary approvals from the landowner. No additional compensation shall be paid to the CONTRACTOR for the cost of obtaining additional right-of-way or for the inability to obtain such.

14. Coordination with Other Work

Other work including but not necessarily restricted to relocation of power and telephone poles, installation of a gas line and relocation of water meters may be in progress near or at the construction site at the time the CONTRACTOR is in performance of the WORK specified herein. The CONTRACTOR shall coordinate his WORK with that of others so that prosecution of all WORK will proceed smoothly.

15. Closure of Streets

The CONTRACTOR will be allowed to temporarily close the streets to vehicular traffic between the hours of 7:00 a.m. and 5:00 p.m. on the days when critical construction operations are occurring. All street closure and detour dates shall be coordinated with and approved by the ENGINEER no later than 10 working days prior to the earliest proposed closures and detours. Proposed street closure and detour dates shall be submitted to the ENGINEER a minimum of 15 working days prior to the earliest proposed closures and detours.

16. Construction Signs, Barricades, Lights and Flagmen

The CONTRACTOR shall furnish, erect and maintain adequate barricades, lights, signs and other devices and take other protective measures to prevent damage to the public. The CONTRACTOR shall also furnish adequate warning to the public of dangerous conditions to be encountered. Where one lane of a public road is closed, the CONTRACTOR shall furnish flagmen at each end of the closed lane to control traffic in the open lane. The CONTRACTOR shall also furnish adequate warning to the public of dangerous conditions to be encountered.

17. Traffic Control Plan

It is the CONTRACTOR'S sole responsibility to establish and implement a Traffic Control Plan conforming to Sections 7-1.08, "Public Convenience" 7-1.09, "Public Safety", and Section 12, "Construction Area Traffic Control Devices", of the Caltrans Standard Specifications. Nothing in these CONTRACT DOCUMENTS shall be construed as relieving the CONTRACTOR from his responsibility.

The Traffic Control Plan shall be prepared, stamped and signed by a professional engineer registered in California, and three copies provided to the ENGINEER for review and concurrence before the CONTRACTOR is issued a NOTICE TO PROCEED.

Payment for the preparation and implementation of the Traffic Control Plan shall be made at the applicable lump sum price bid in the Bid Schedule.

18. Disposal of Waste Materials

Waste material shall be disposed of in accordance with local regulatory requirements. Provide watertight conveyance for liquid, semi-liquid or saturated solids which tend to bleed during transport. Liquid loss from transported materials is not permitted, whether being delivered to construction site or hauled away for disposal. Fluid materials hauled for disposal must be specifically acceptable at selected disposal site.

19. Noise Control

Conduct operations to cause least annoyance to residents in vicinity of WORK, and comply with applicable local ordinances. Equip compressors, hoists, and other apparatus with mechanical devices necessary to minimize noise and dust. Equip compressors with silencers on intake lines. Equip gasoline or oil-operated equipment with silencers or mufflers on intake and exhaust lines.

20. Water Supply

Water will be available to the CONTRACTOR in performance of the Work without charge from all OWNER fire hydrants. Prior to the use of any hydrant the CONTRACTOR shall notify the OWNER and obtain and install a meter furnished by the Public Works Department on the fire hydrant. It will be the CONTRACTOR's responsibility to convey the water to the Work site. Regardless of the method of conveyance chosen, it shall not be cause for closure of any streets nor shall it create a nuisance to nearby residents. An air gap shall be maintained between the hose or pipe discharge to prevent possible backflow in the event of distribution system pressure loss. The CONTRACTOR shall pay a deposit for the use of the fire hydrant meter. The deposit may be refunded in full if the fire hydrant meter is returned undamaged.

21. Notifications

The OWNER will notify the CONTRACTOR in writing of any non-compliance with the foregoing provisions or of any environmentally objectionable acts and corrective action to be taken. State or local agencies responsible for verification of certain aspects of the environmental protection requirements shall notify the CONTRACTOR in writing, through the OWNER, of any non-compliance with State or local requirements. The CONTRACTOR shall, after receipt of such notice from the OWNER or from the regulatory agency through the OWNER, immediately take corrective action. Such notice, when delivered to the CONTRACTOR or his authorized representative at the site of the Work, shall be deemed sufficient for the purpose. If the CONTRACTOR fails or refuses to comply promptly, the OWNER may issue an order stopping all or part of the Work until satisfactory corrective action has been taken. No part of the time lost due to any such stop orders shall be made the subject of a claim for extension of time or for excess costs or damages by the CONTRACTOR unless it is later determined that the CONTRACTOR was in compliance.

22. Work Not Listed in Proposal

It is the intent of the plans, specifications and contract documents to provide for the construction of completed and finished facilities and works of improvement unless otherwise specifically provided. Except for authorized changes in the work, payment for said complete and finished facilities and works of improvement will be made only on the basis of the contract items of work listed in the proposal. All other work, including the furnishing of plants, labor, materials, tools, equipment, and incidentals, provided for in the plans, specifications and contract documents, or required for the proper completion of the work as a whole, for which no separate payment has been provided shall be a supplementary obligation of the CONTRACTOR and payment therefore shall be considered included in the prices paid for the various contract items of work listed in the proposal.

23. Submittals

The CONTRACTOR shall submit to the ENGINEER a minimum of six sets of the following submittals for review and approval:

1. Water Pipeline and Appurtenances (Fittings, Couplings, Saddles)

2. Water Service Tubing and Appurtenances
3. Storm Drain Pipeline and Appurtenances (Fittings, etc.)
4. Manholes
5. Sewer Lateral Piping and Appurtenances
6. Aggregate Base
7. Concrete Mix Design
8. Asphalt Concrete Mix Design
9. Reinforcing Steel

Within 10 days after the Effective Date of the Agreement, and before starting to perform any WORK, the CONTRACTOR shall submit to the ENGINEER for review and approval:

1. A Work Schedule indicating the times for starting and completing the various stages of the Work. No PROGRESS PAYMENT shall be made to CONTRACTOR until an acceptable schedule has been submitted to the ENGINEER.
2. Traffic Control Plan.
3. Notice to Residents in English and Spanish.
4. A Schedule of Values.
5. A Complete list of equipment and materials to be furnished.
6. City of Los Banos Business License

If more than TWO submittals for a single item are required because of incorrect or insufficient data, or the submittal is unacceptable, or because the CONTRACTOR wishes to change previously approved material, then all costs incurred by the OWNER for the additional review shall be deducted from monies due the CONTRACTOR.

A Revised Work Schedule shall be submitted within 5 days of request by the ENGINEER. No future PROGRESS PAYMENT shall be made to CONTRACTOR until an acceptable schedule has been submitted to the Engineer.

24. Bid Item Descriptions

The intent of bid item descriptions is to assist the Contractor in preparing the bid. Bid item descriptions may not address the entire scope of work under each item and do not relieve the Contractor's obligation to perform the entire work in conformance with the Contract Documents.

Work set forth in the Bid Schedule/s for this project will be paid on a unit price or lump sum basis. Unit prices and lump sum prices for each item shall include full compensation for completing the work as described, including materials, labor, and equipment and all appurtenant work necessary for the completion of the work for that item.

BID SCHEDULE

“L” STREET WATERLINE

Item 1 - Mobilization - This is a lump sum item for work related to moving of equipment, supplies, personnel and incidentals to the project site, setting up facilities for the performance of the work, and for removing all of the above items upon completion of construction. This item also includes compensation for bonds, insurance and permits. The bid amount for this item shall not exceed \$12,000.00.

Item 2 - Traffic Control – This is a lump sum item for preparing and implementing a traffic control plan for all work on the project per Caltrans Standard Specifications and in accordance with the project plans and technical specifications. The bid amount for this item shall not exceed \$18,000.00.

Item 3 - Furnish and Install 10-Inch Waterline– This is a unit price item for furnishing and installing 10-inch PVC C900 Class 150 and Class 200 pipe, fittings, bends, couplings, and thrust blocks paid per linear foot of water pipeline completed in place. The work includes sawcutting pavement and concrete, trench excavation, dewatering, changes in vertical alignment to avoid utility conflicts (lowering and/or raising waterline), backfilling, compacting, connecting to existing water mains, testing, placement of aggregate base, asphalt concrete trench repairs, concrete work, disconnecting, placing plugs, and abandoning the existing waterline in place, abandoning water valves in place, and all other work required to complete in place the waterline as shown on the plans and in accordance with the technical specifications.

Item 4 - Furnish and Install 6-Inch Waterline – This is a unit price item for furnishing and installing 6-inch PVC C900 Class 150 pipe, fittings, bends, couplings, and thrust blocks paid per linear foot of water pipeline completed in place. The work includes sawcutting pavement and concrete, trench excavation, dewatering, changes in vertical alignment to avoid utility conflicts (lowering and/or raising waterline), backfilling, compacting, connecting to existing water mains, testing, placement of aggregate base, asphalt concrete trench repairs, concrete work, disconnecting, placing plugs, and abandoning the existing waterline in place, abandoning water valves in place, and all other work required to complete in place the waterline as shown on the plans and in accordance with the technical specifications.

Item 5 - Furnish and Install 10-Inch Water Valve– This is a unit price item for furnishing and installing 10-inch diameter gate valves and valve boxes paid per each unit installed. Work includes excavation, backfill and compacting, installing valve riser, pipe connections, asphalt concrete trench repairs, and all other work required to complete the water valve as shown on the plans and in accordance with the technical specifications, excluding two 10-inch water valves associated with the hot tap connections.

Item 6 - Furnish and Install 6-Inch Water Valve – This is a unit price item for furnishing and installing 6-inch diameter gate valves and valve boxes paid per each unit installed. Work includes excavation, backfill and compacting, installing valve riser, pipe connections, asphalt concrete trench repairs, and all other work required to complete the water valve as shown on the plans and in accordance with the technical specifications, excluding water valves associated with new fire hydrant assembly, transferring existing fire hydrants to new main, and transferring the school fire service.

Item 7 - Furnish and Install 4-Inch Water Valve – This is a unit price item for furnishing and installing 4-inch diameter gate valves and valve boxes paid per each unit installed. Work includes excavation, backfill and compacting, installing valve riser, pipe connections, asphalt concrete trench repairs, and all other work required to complete the water valve as shown on the plans and in accordance with the technical specifications.

Item 8 - Hot Taps – This is a unit price item for hot tapping to existing waterlines. Work includes

trenching, hot tap connection, furnishing and installing water hot tapping valve, backfill, asphalt concrete trench repairs and all other work required to complete hot tap connections as shown on the plans and in accordance with technical specifications.

Item 9 - Furnish and Install Fire Hydrant Assembly – This is a unit price item for furnishing and installing fire hydrant barrel, bury, piping, water valve, and connection to water main. The work includes trenching, backfilling, compaction, connection to new water main, testing, concrete work, removing and disposing existing pipe sections as required to clear the area for installation of the new fire hydrant assembly, asphalt concrete trench repairs, and completing all other work required to complete the fire hydrant assembly as shown on the plans and in accordance with the technical specifications.

Item 10 - Transfer Existing Fire Hydrant Connection – This is a unit price item for connecting existing fire hydrant services to new waterline paid per each tie-in completed. The work includes trenching, backfilling, compacting, cutting, removing and disposing of existing service as required to complete the tie-in, furnishing and installing 6-inch pipe, fittings, couplings, water valves, testing, asphalt concrete trench repairs, and completing all other work required to complete the fire hydrant service transfers as shown on the plans and in accordance with the technical specifications.

Item 11 - Transfer School Fire Service – This is a unit price item for furnishing and installing 6-inch service line from existing meter to new waterline paid per unit of each transfer completed. The work includes trenching, backfilling, compacting, asphalt concrete trench repairs, concrete work, cutting and disposing of existing service as required to complete the tie-in, furnishing and installing 6-inch pipe, fittings, coupling, water valve, testing, asphalt concrete trench repairs, and all other work required to complete the school fire service transfer as shown on the plans and in accordance with the technical specifications.

Item 12 - Transfer Existing Residential Water Services – This is a unit price item for connecting all existing water services to the new waterline paid per each tie-in completed. The work includes trenching, backfilling, compacting, asphalt concrete trench repairs, concrete work, connecting new service line form existing water meter to new water main, service saddle, corporation stop, asphalt concrete trench repairs, and other work required to complete the water service transfers as shown on the plans and in accordance with the technical specifications.

Item 13 - Remove and Re-Install Sign – This is a unit price item for removing and relocating an existing sign paid per unit complete in place. The work includes removal and disposal of posts and footings, and installation of the existing sign legend/street name sign on a new post, and completing all other work required to complete the relocation of signs as shown on the plans and in accordance with technical specifications.

Item 14 - Furnish and Apply Thermoplastic Markings – This is a lump sum item for applying thermoplastic markings in place including any necessary removal by grinding and vacuuming, and completing all other work required to complete thermoplastic markings as shown on the plans and in accordance with the technical specifications.

Item 15 – Construction Staking – This is a lump sum item for construction staking/surveying services.

BID SCHEDULE –

HENRY MILLER AREA STORM DRAIN

Item 16 -Mobilization - This is a lump sum item for work related to moving of equipment, supplies, personnel and incidentals to the project site, setting up facilities for the performance of the work, and for removing all of the above items upon completion of construction. This item also includes compensation for bonds, insurance and permits. The bid amount for this item shall not exceed

\$18,000.00.

Item 17 -Traffic Control – This is a lump sum item for preparing and implementing a traffic control plan for all work on the project per Caltrans Standard Specifications and in accordance with the project plans and technical specifications. The bid amount for this item shall not exceed \$23,000.00.

Item 18 -Furnish and Install 36-Inch Storm Drain Pipe – This is a unit price item for furnishing and installing 36-inch RCP paid per linear foot in place. The work includes trenching, backfilling, compacting, sawcutting, placement of aggregate base, asphalt concrete trench repairs, and completing all other work required to complete the storm drain line as shown on the plans and in accordance with the technical specifications.

Item 19 -Furnish and Install 18-Inch Storm Drain Pipe – This is a unit price item for furnishing and installing 18-inch RCP paid per linear foot in place. The work includes trenching, backfilling, compacting, sawcutting, placement of aggregate base, asphalt concrete trench repairs, and completing all other work required to complete the storm drain line as shown on the plans and in accordance with the technical specifications.

Item 20 – Furnish and Install 12-Inch Storm Drain Pipe – This is a unit price item for furnishing and installing 12-inch RCP paid per linear foot in place. The work includes trenching, backfilling, compacting, sawcutting, placement of aggregate base, asphalt concrete trench repairs, and completing all other work required to complete the storm drain line as shown on the plans and in accordance with the technical specifications.

Item 21 -Furnish and Install Storm Drain Manhole – This is a unit price item for furnishing and installing 48-inch diameter manholes paid per unit installed. The work includes excavation, backfilling, compacting, pipe connections, asphalt concrete trench repairs, and completing all other work required to complete the manholes in place as shown on the plans and in accordance with the technical specifications.

Item 22 -Construct Storm Drain Catch Basin – This is a unit price item for constructing storm drain catch basins. The work includes demolition, trenching, backfill, sawcutting, placement of aggregate base, concrete removal and repairs, asphalt concrete removal and repairs, connections, and completing all other work required to complete the catch basins in place as shown on the plans and in accordance with the technical specifications.

Item 23 -Sheeting, Shoring, and Bracing – This is a lump sum item for providing sheeting, shoring, bracing, or equivalent method of worker protection as required by OSHA and for any other applicable state law.

Item 24 -Sewer Line Installation and Sewer Service Reconnections – This is a lump sum item for all sewer adjustments as required for construction and installation of the storm drain line. The work includes furnishing and installing approximately 775 linear feet of 6-inch SDR-35 pipe, 8 linear feet of 10-inch C-900 pipe, 8 linear feet of 6-inch C-900, furnishing and installing three sewer clean outs, two sewer manholes, temporary bypass, fittings, transferring and connecting 8 sewer laterals, connection to two existing sewer lines, sawcutting, trenching, backfilling, compacting, placement of aggregate base, asphalt concrete removal and replacement, concrete work, and completing all other work required for sewer work as shown on the plans and in accordance with the technical specifications.

Item 25 -Water Main and Water Service Adjustments – This is a lump sum item for adjusting all water mains and water services as required for construction and installation of the storm drain line. The work shall include all costs for demolition and for furnishing and placing all water main pipe and adjusting water services, bends, fittings, thrust blocks, minor concrete work, pipe appurtenances, connections, encasement, sawcutting of pavement and/or concrete, trench excavation, backfill, including replacement of asphalt road surfacing and aggregate base material, and all other materials and work required for the Work.

It is estimated that 5 water main crossings and 6 water services will need to be adjusted. Water service adjustments may range from lifting existing service poly without having to replace it to a complete replacement of the poly from the corporation stop at the service saddle to the angle valve at the meter.

Item 26 -Furnish and Apply Thermoplastic and Paint Markings and Striping – This is a lump sum item for applying thermoplastic and paint markings and striping in place including any necessary removal by grinding and vacuuming, and completing all other work required to complete thermoplastic and paint markings and striping as shown on the plans and in accordance with the technical specifications.

Item 27 – Construction Staking – This is a lump sum item for construction staking/surveying services.

TECHNICAL PROVISIONS

SECTION 1 DEMOLITION

1. GENERAL

Demolition shall consist of sawcutting, demolishing, removing and disposing of concrete, base and native material, pavement, valves, fences, trees, pipes, abandoning catch basins, storm drain siphons, and all other items required to be removed as shown on the plans and as required for construction.

All items to be demolished and/or removed shall become the property of the Contractor unless otherwise stated in the Drawings or as directed by the Owner, and shall be removed from the project site and properly disposed of in a timely manner.

Demolition items shall not be measured for payment.

Payment of items to be demolished shall be included in the applicable unit or lump sum prices in the Bid Schedule for which demolition is appurtenant.

END OF SECTION

SECTION 2 AGGREGATE BASE

1. GENERAL

The Contractor shall furnish, spread and compact the aggregate base to the grades, depths and neat lines shown on the Drawings.

2. MATERIALS

Aggregate base shall be Class 2, 3/4-inch maximum size and shall conform to Section 26, "Aggregate Bases," of the State of California, Department of Transportation Standard Specifications.

Aggregate base shall be non-recycled (virgin).

3. CONSTRUCTION

Following excavation of the native material, the subbase shall be graded and the top 6-inches of native material compacted to the specified relative compaction as determined by ASTM Designation D-1557. The finished surface of the grading plane shall not be more than 0.05 feet above the grade shown on the Drawings at any point.

Spreading and compaction of aggregate base shall be in accordance with Section 26 of the State Standard Specifications except as specified herein.

Water may be introduced into the aggregate base prior to spreading in sufficient quantities to prevent segregation and non-uniform thickness of spread.

The use of dump trucks is not precluded if the desired final results can be satisfactorily obtained. Other approved spreading and equipment which will produce the desired results may be used.

4. TESTING

Field density tests shall be made of each compacted layer (subbase and aggregate base) as directed by the Engineer. When these tests indicate that the density of any layer of fill or portion thereof is less than the specified density, that layer shall be reworked until the required density has been obtained.

Field density tests (compaction testing) shall be performed by a geotechnical laboratory retained by the Owner and under the supervision of a registered geotechnical engineer.

5. MEASUREMENT AND PAYMENT

Aggregate base shall not be measured for payment. Payment shall be included in the applicable unit or lump sum prices bid for which aggregate base is appurtenant to and shall include all compensation for furnishing and placing the aggregate base complete in place, any additional surface preparation, and all other work required to complete the aggregate base work as specified or as directed by the Engineer.

Initial compaction testing will be paid by the Owner. Retesting of areas that failed the initial testing will be paid for by the Contractor.

END OF SECTION

SECTION 3 CONCRETE

1. GENERAL

The Contractor shall furnish all labor, equipment and materials, including cement, sand and coarse aggregate, water, admixtures, curing compound, reinforcement, tools, form work and other materials necessary for construction of all concrete Work. Concrete work includes concrete repairs, construction of catch basins and manholes, and all other concrete work items shown on the Drawings. Concrete materials shall conform to the provisions in Section 90, "Portland Cement Concrete" of the State Standard Specifications and these special provisions.

2. CONSTRUCTION

Concrete shall develop a minimum 28-day compressive strength of 3,500 psi. The net water-cement ratio of the concrete (exclusive of water within or absorbed by the aggregates) shall not exceed 0.55, by mass. A minimum of 5.5 sacks of cement to each cubic yard of concrete shall be used. The slump shall not exceed 4 inches. The Engineer reserves the right to alter the required slump whenever, in his judgment, the quality of the Work would be improved.

The amount of air entraining agent shall be such as will affect the entrainment of 3% to 5% of air, by volume of the concrete at the time of discharge from the mixer. All tests for concrete and concrete materials and associated procedures therefore will be made by the Engineer and such tests shall conform to the latest ASTM Designation.

Concrete shall have a light to medium broom finish.

Steel reinforcement shall conform to the provisions in Section 52 "Reinforcement", of the Standard Specifications and these Special Provisions.

3. MEASUREMENT AND PAYMENT

Concrete shall not be measured for payment. Payment shall be included in the applicable lump sum and unit prices bid in the Bid Schedule for which concrete is appurtenant to.

Payment at the applicable price shall include all compensation for forming, placement of steel reinforcement, doweling, aggregate base, and furnishing and placing concrete required for construction valley gutters, curb and gutter, sidewalk, and all other required work required to complete the concrete work as specified.

END OF SECTION

SECTION 4 AC PAVING

1. GENERAL

AC paving consists of all work necessary to furnish and place a layer of asphalt concrete over an aggregate base as shown on the Drawings. AC Paving for trench repairs consists of asphalt concrete pavement repair of trench areas for pipe, valves, catch basins, manholes, water services, and sewer services. AC paving also includes all other areas where AC paving is required for prosecution of the work.

2. MATERIALS

Asphalt concrete surfacing shall consist of a mixture of mineral aggregate and paving grade asphalt mixed at a central mixing plant and spread and compacted to form a uniform layer. The specification grade of the asphalt shall be PG64-10. Asphalt concrete surfacing shall be Type B, ½-inches maximum size. Asphalt concrete shall conform to Section 39 of the State of California, Department of Transportation Standard Specifications. Paint binder shall be SSI furnished and applied in accordance with the provisions in Section 94, "Asphalt Emulsions", of the State Standard Specifications.

3. SPREADING AND COMPACTING

Spreading and compacting of the asphalt surfacing shall be in accordance with Section 39 of the State Standard Specifications except that a three-axle roller is not required and pneumatic tired rollers are not allowed. Prior to placing asphalt paving, paint binder shall be applied to all vertical surfaces of existing pavement, curbs, gutters, construction joints in the surfacing against which additional material is to be placed, pavement to be surfaced, and any other surfaces designated by the Engineer. Paint binder shall be applied in one application at a rate of between 0.05 and 0.10 gallons per square yard of surface covered. The exact rate shall be as directed by the Engineer. Immediately in advance of placing asphalt concrete, additional paint binder shall be applied as directed by the Engineer to areas which may have been damaged.

4. MEASUREMENT AND PAYMENT

Asphalt concrete shall not be measured for payment. Payment for asphalt concrete placed for trench patch of storm drain and waterline construction shall be included in the applicable unit or lump sum prices in the Bid Schedule and shall include all compensation for sawcutting, placing aggregate base, applying paint binder, placing and compacting new asphalt concrete and completing all other work required for furnishing and placing asphalt concrete surfacing in place as specified by the Engineer.

END OF SECTION

SECTION 5 PIPELINES GENERAL

1. GENERAL

The Contractor shall furnish and install all pipe, fittings and all other appurtenant apparatus required to complete the pipelines in an operating condition. No damaged or imperfect pipe will be permitted.

The Contractor shall furnish all supports, bracing, other materials, and all work required for pipe hauling, unloading, distributing, trenching, placing, backfilling and testing of the pipelines.

Before purchasing pipe, the Contractor shall submit to the Engineer for review, complete sets of data covering the pipe and pipe joints that he proposes to furnish including details and calculations of the pipe joints, showing that pipe joints conform to applicable Specifications for the pipe being furnished.

The pipe shall be clearly marked with the following information:

1. Class and size of pipe, as indicated by applicable Specifications.
2. The type of cement if applicable.
3. The date of manufacture.
4. The name or trademark of the manufacturer.

2. OPEN EXCAVATION PIPELINES

A. GENERAL - The pipe trench shall be dug with side walls sloped or otherwise supported in a safe manner in accordance with the Department of Industrial Relations, Division of Occupational Safety and Health Administration regulations pertaining to trenching.

B. GRADE AND ALIGNMENT - The alignment and grade for the bottom of the trench shall be properly established before the trench is excavated. Trenches shall be true to line and grade, and the bottom shall be even and free from all objectionable material.

C. WATER IN TRENCH - When water is encountered in the trench, it shall be removed by draining or by pumping. Should water get into the trench before the pipe is laid, the laying of pipe will be postponed until the trench has dried sufficiently to provide a firm foundation for the pipe, or else the mud or softer material shall be removed and grade re-established by backfilling and compacting with suitable material as determined by the Engineer. The Contractor is responsible for dewatering and stabilizing at no additional cost.

D. LAYING AND JOINTING OF PIPE - Laying and jointing of pipe shall be in accordance with the manufacturer's recommendations and as approved by the Engineer. Joint deflections shall not exceed 80% of the maximum recommendations of the manufacturer.

- a. The interior of the pipe shall be cleared of all debris, and exposed pipe ends shall be closed by a suitable pipe plug when pipe laying is not in progress.

- b. The pipe shall be laid on a trench bottom shaped to provide adequate support of the pipe except at coupling or bell holes. The use of prepared mounds to facilitate laying of the pipe is not approved.

E. CURVES AND BENDS - As shown on the Drawings, changes in the alignment and grade shall be made with fittings designed for the pipe. Deflection angles may be accommodated by long radius curves provided that the pipeline alignment remains within the permanent right-of-way and the use of a curve has been approved by the Engineer. The Contractor may submit details or other methods of providing curves and bends in the pipeline for consideration by the Engineer. The Contractor may submit details or other methods of providing curves and bends in the pipeline for consideration by the Engineer, and if deemed satisfactory, may be approved and shall be installed at no additional cost to the Owner.

F. FITTINGS - The Contractor shall furnish and install all air vents, fabricated bends, tees, and reducers as shown on the Drawings for the applicable type of pipe. Unless otherwise specified, all materials, methods, and operations required to complete the fittings in an operating watertight condition shall conform to the provisions of the specification pertaining to the type of pipe in which the fitting is installed. Fabricated bends shall include bends, thrust blocks, and encasements as required. The deflection angles between adjacent sections in any particular fabricated bend shall be equal.

- a. The Contractor may submit alternate designs for review, but no increase in the Contract price shall be made for alternate designs. Prior to fabrication of any fittings, the Contractor shall submit to the Engineer for review, Shop Drawings detailing the pipe fitting proposed.
- b. Miscellaneous components not specified, but required to complete the fittings shall be furnished and installed by the Contractor. These materials shall be first-class components or materials and shall meet the applicable ASTM, ASA or AWWA Standard.
- c. Fittings will not be measured for payment but all pay payment for fittings will be included in the applicable unit or lump sum price for the bid item of which the fitting is a part.

G. BACKFILL OF PIPE - Backfill shall not be dropped directly on the pipe. Backfill placed within six inches of the pipe shall be free from heavy gravel, or stones greater than three inches in maximum dimension, or both. The Contractor shall segregate material greater than three inches in maximum dimension.

- a. The pipe shall not be displaced from alignment during the backfilling operation. Backfill shall be placed at approximately the same elevation on both sides of the pipe. Material used for backfill and compaction requirements shall be as shown on the Drawings.

H. FINAL GRADING - After the pipeline has been backfilled to the natural groundline, any excess dirt remaining shall be disposed of as approved by the Engineer.

I. FINAL GRADING IN ROAD SECTIONS - In asphalt areas, the trench shall be paved.

3. MEASUREMENT AND PAYMENT

Pipelines will be measured in linear feet of pipe in place according to size and type of pipeline unless otherwise stated in these specifications. If measured, measurement will be made from points as designated on the Drawings or if not designated, then from connection points to other facilities or center of manholes or fittings installed in the pipeline. Pipeline measurement shall exclude distances for manhole diameters or fitting lay lengths as applicable.

Payment will be made at the applicable unit or lump sum price bid therefore in the Bid Schedule for pipelines. Payment shall include all costs of furnishing and placing all pipe, bends, fittings, thrust blocks, minor concrete work, pipe appurtenances, connections, encasement, sawcutting of pavement and/or concrete, trench excavation, backfill, including replacement of asphalt road surfacing and aggregate base material, and all other materials and work requested for the installation of pipelines.

Payment for shoring or other methods of worker protection in excavated areas shall be made at the applicable lump sum price bid in the Bid Schedule.

SECTION 6 WATER DISTRIBUTION PIPELINES

1. GENERAL

The Work shall consist of furnishing and installing all water mains, valves, fittings and appurtenances complete and ready to operate, in strict accordance with the Specifications herein, and as shown on the Drawings.

2. PIPE MATERIALS

Water pipe shall be PVC pressure pipe manufactured in accordance with AWWA C-900 for cast iron pipe equivalent O.D.'s with elastomeric joints. Fittings shall be cast iron conforming to AWWA C-110. The working pressure shall be 150 psi minimum unless otherwise shown on the Drawings. Fittings shall be furnished with a joint type suitable for attaching valves or for pressure pipe furnished by the Contractor. Adapter gaskets are not acceptable.

Water pipe shall be Class 150 on L Street, except pipe between station 30+60 to 39+50 shall be Class 200.

PVC pressure pipe shall be installed in accordance with Uni-Bell Plastic Pipe Association Standard UNI-B-3-77.

A No. 12 gage TW insulated tracer wire shall be installed along all water lines.

3. THRUST BLOCKS

Thrust blocks shall be concrete, non-reinforced and shall be poured against undisturbed trench side walls. Contact with the fittings supported shall be made on the body of the fitting only and not on the bell ends. Prior to placement of concrete, fittings and piping within 6-inches of the fittings shall be wrapped in 6 mil plastic. Thrust blocks shall be placed at all tees and elbows and wherever designated on the Drawings.

4. GATE VALVES

Gate valves shall be resilient seating conforming to the requirements of AWWA C-509. Valves shall be parallel disks, non-rising stems with ends designed for connection of pipe specified herein as shown on the Drawings. Valves shall be placed to operate in a vertical position, be equipped with a (2) two inch nut or handwheel as required and shall be open by turning in a counter clockwise direction.

5. VALVE RISERS

Valve risers shall be furnished for each buried valve unless otherwise shown on the Drawings. Valve boxes shall be precast concrete with cast iron ring and cover. Grade of riser rings shall be available for the type of box supplied. The minimum inside diameter of the box shall be 10-inches. Boxes shall be Christy G5 or Brooks No. 4-TT or an approved equivalent.

6. FIRE HYDRANTS

Hydrants shall meet the requirements of AWWA C-502 for dry barrel hydrants with the drain outlet omitted, and shall have two 2 ½ inch nozzles and one 4 ½ inch pumper nozzle. The valve opening shall have a diameter of at least 5 ¼ inches. The hydrants shall be traffic type with a replaceable breakaway unit immediately above the groundline. The main hydrant shall close with water pressure when the hydrant is severed.

Pipe for fire hydrant service shall be PVC C900 Class 200.

Hydrants shall be furnished with caps with rubber gaskets and chains. The Contractor shall adjust the "bury length" of the hydrant to provide proper installation. The pumper nozzle shall be rotated to face the street after installation.

Hydrants shall be American AVK-2700 and be painted from groundlevel to top of hydrant with a factory silver enamel finish coat.

Connect fire hydrants at the bury bend or at the main required for the "barrel and bury" or "assembly" type of installation. Any service modifications required to complete the "barrel and bury" type installation will be provided as extra work.

Pressure test and chlorinate fire hydrant services concurrently with the water main.

7. CONNECTIONS TO EXISTING LINES

The Contractor shall make all connections to existing waterlines in the presence of the Engineer or Owner's representative. No connections will be made without the Engineer's approval. No valves connecting the new system to the existing system will be opened until all testing has been completed and the new line has been successfully disinfected.

The Contractor shall use an approved double check backflow preventer between the existing watermain and the new line for filling the new line for testing and chlorination purposes.

Owner personnel will be the only ones to open or close existing water valves.

8. ABANDONMENT OF EXISTING WATER MAINS

Disconnect existing waterlines from system as shown on the plans. Remove and dispose of designated pipe sections to clear area for installation of the new waterline. Install 3' long concrete plug at exposed ends of designated abandoned line. Plug all water service disconnects as required per field conditions.

9. TESTING

All buried piping shall be pressure tested. Tests shall be witnessed by the Engineer and the Engineer shall be notified not less than 48 hours prior to the time the test is to be conducted.

The hydrostatic pressure shall be 150 psi, based on the elevation of the lowest point of the section under and corrected to the elevation of the test gauge. The test pressure shall be maintained for two (2) hours by pumping water from a measuring tank into the line. At the end

of 2 hours, the volume of water pumped into the line will be measured and recorded as the leakage.

No pipe installation will be accepted until the leakage in each section is less than the amount based on the rate of seven-hundredths (0.07) gallon per inch of diameter per 1000 feet of pipe per one (1) hour.

The Contractor shall furnish all equipment for making tests including a suitable certified test gauge for measuring the applied line pressure. The tank containing the water to maintain line pressure shall be of such a design that the volume of water used may be accurately measured.

10. CHLORINATION

The Contractor shall provide all materials and labor to disinfect the water lines. This operation shall be conducted in the presence of the Owner and as outlined herein below. The Contractor shall advise the Owner 48 hours in advance of the time when the disinfection procedure will be practiced.

All lines shall be disinfected by chlorination in accordance with AWWA C-651 "Disinfecting Water Mains" and as herein specified.

The chlorine solution shall then be introduced into the line at service connections or at such locations along the line that uniform distribution of chlorine throughout the line is insured, including services, fire hydrants and stubs. The line shall then be checked for contamination of a laboratory approved by the Owner and either accepted or rejected for use. In case of rejection, the chlorination process shall be repeated until the contamination test is satisfactory.

11. WATER SERVICE CONNECTIONS/TRANSFERS

Water service connections/transfers will be made following successful hydrostatic testing and disinfection of the water lines.

Services shall be hot tapped and connections made to the existing services in such a manner as to minimize disruption of water deliveries. New service saddles and corporation stops are required at the water main.

Water service transfers will require new polyethylene tubing from the existing angle valve at the meter to the corporation stop at the service addle. Splicing will not be allowed.

Where feasible, the Contractor may install the new polyethylene tubing without trenching (by pulling). Where necessary, the Contractor is responsible for trenching, backfilling, and trench patching (AC paving).

12. MEASUREMENT AND PAYMENT

Measurement and Payment for waterlines shall be in accordance with Section 5-3.

Water valves (gate valves) shall be measured per completed unit and paid for at the applicable unit price bid in the Bid Schedule.

Residential water service connections/transfers shall be measured per completed unit and paid for at the applicable unit price bid in the Bid Schedule. Payment at the applicable price shall include all compensation for trenching, backfilling, compacting, asphalt concrete trench repairs (AC over AB), connecting new service tubing from existing water meter to the new water main, new service saddle and corporation stop, concrete work, and all other work required to complete the water service transfers as specified.

Fire hydrant assemblies and fire hydrant transfers shall be measured per completed unit and paid for at the applicable unit price bid in the Bid Schedule.

School fire service transfer shall be measured per completed unit and paid for at the applicable unit price bid in the Bid Schedule.

Payment at the applicable price for water valves, fire hydrant assemblies, fire hydrant transfers, and school fire service transfer shall include compensation for trenching, backfilling, compacting, asphalt concrete trench repairs (AC and AB), connecting to new water line, concrete work, and all other work required to complete the work as specified.

Water main adjustments and water service adjustments related to the storm drain portion of the project will not be measured for payment and will be paid for at the applicable lump sum price bid in the Bid Schedule.

Payment for water main adjustments and water service adjustments shall include all costs for demolition and for furnishing and placing all water main pipe and adjusting water services, bends, fittings, thrust blocks, minor concrete work, pipe appurtenances, connections, encasement, sawcutting of pavement and/or concrete, trench excavation, backfill, including replacement of asphalt road surfacing and aggregate base material, and all other materials and work required for the Work.

END OF SECTION

SECTION 7 STORM DRAINAGE PIPELINES

1. GENERAL

The Contractor shall furnish and install all storm drain pipe as shown on the Drawings, complete, including manholes, catch basins, and all other appurtenances. The Contractor shall replace all existing roadway pavement, concrete, utility services, and other existing structures to their original conditions and in accordance with the Drawings.

The Contractor shall construct reinforced concrete pipelines with rubber gasket joints at all locations shown on the Drawings.

The Contractor shall furnish and install all pipe, materials, fittings, and all other appurtenant apparatus required to complete the concrete pipeline in an operating, leak-free condition. No cracked, broken, or spalled pipe will be permitted.

The Contractor shall furnish all supports, bracing, other materials, and all work required for pipe hauling, unloading, distributing, trenching, placing, backfilling, and testing of the pipeline.

2. MATERIALS

Storm drain pipe shall be RCP and shall conform to the specification for Reinforced Concrete Pipe, ASTM Designation C76, Culvert Storm Drain and Sewer Pipe. The pipes shall be manufactured utilizing the packer head method, vertically cast or centrifugally spun. Use of elliptical reinforcement in the pipe is not allowed. Pipe shall be Class III unless otherwise indicated. Pipe shall utilize a Bureau of Reclamation R-4 rubber gasketed bell and spigot.

3. FITTINGS

The Contractor shall furnish and install all fabricated bends and tees where shown on the Drawings. Unless otherwise specified, all materials, methods, and operations required to complete the fittings in an operating watertight condition shall conform to the provisions of the specification pertaining to the type of pipe in which the fitting is installed.

Prior to the fabrication of any fittings, the Contractor shall submit to the Engineer for review, Shop Drawings detailing the pipe fitting proposed.

4. MANHOLES

Manholes shall be located and constructed as shown on the Drawings. All manholes shall conform to the requirements of ASTM C478. Joints in concrete manholes sections shall be completely filled with Portland Cement mortar.

The cement used for mortar shall conform to ASTM C150, Type II. Water for cement mortar shall be clean and free from injurious amounts of oil, alkali, organic matter or other deleterious substances. Mortar sand shall consist of clean, hard, sharp-grained particles, all passing a No. 4 sieve. Mortar shall consist of one part by volume of cement, one and one-half parts by volume of sand with sufficient water added to bring the mixture to a workable consistency. Mortar which

has begun to set shall not be used. All joints shall be water tight. Particular care must be taken to protect the manholes from damage and to keep rock, dirt and debris from getting into sewer.

Manhole frames and covers shall be as shown on Drawings and shall meet the requirements of ASTM A48. Frames and covers shall be machined where they bear one on another to ensure a close fit so as not to be loose and wobbly.

5. HANDLING, LOADING, HAULING, UNLOADING, AND DISTRIBUTING

During the handling, loading, hauling, unloading or distributing of the pipe, every precaution shall be taken to prevent injury to the pipe. The pipe shall not be dropped, bounced, or bumped together.

During transportation, each pipe shall rest upon suitable pack strips or blocks and shall be securely strapped in place. Each section of pipe shall be delivered as near as practicable to its final location.

Where necessary to move pipe, it shall be done in such a manner as to prevent injury to the pipe. When handling the pipe, the Contractor shall take necessary precaution to prevent dirt or debris from entering the pipe. If dirt or debris enters the pipe, it shall be removed by the Contractor.

6. TRENCHING PIPE

Trenching for pipe shall conform to Section 5-2.A of these Specifications and shall be as shown on the Drawings.

7. LAYING AND JOINTING OF PIPE

Immediately before placing each section of pipe, the bottom of the trench or the pipe bedding shall be prepared to provide uniform bearing along the full length of the pipe except at the bell holes in accordance with the Drawings. A bell hole shall be excavated under and immediately in front of the last section of pipe which has been laid. Bell holes shall provide a minimum clearance between the pipe bottom and the bottom of the bell hole of three inches, but in no case shall the bell hole be smaller than required to facilitate joining or laying the pipe.

The pipe shall be placed firmly in the center of the trench and true to alignment and grade.

All pipe shall be installed with the bell end on the upstream side.

Pipe joints shall be assembled according to the manufacturer's recommendations, these Specifications, and as directed by the Engineer, but regardless of the method used, the joints shall be watertight. The gasket position shall be checked by a feeler gauge prior to installing additional sections of pipe or grouting the joint.

8. JOINT PROTECTIVE MORTAR

Joint protective mortar shall be applied on the interior of pipe joints where required by the applicable type of joint, or where the interior joint gap exceeds 3/8- inch. Mortar for filling and pointing interior joints of rubber gasket concrete pipe shall be composed of not less than 1 part Portland cement, Type II, to 2 parts, by weight, of clean well-graded sand which shall pass a

1/8-inch screen. Ad admixture may be used, not exceeding one of the following percentages by volume of cement: hydrated lime 5%, fire clay, diatomaceous earth, or other suitable inert material, 10%. Any mortar that has become so stiff that retempering is necessary shall be wasted. Interior joints shall be filled and pointed after the backfill is completed. The finished joint shall be smooth and flush with the adjacent pipe surface.

Where required by the applicable type of joint, mortar for grouting exterior joints of rubber gasket concrete pipe shall be composed of not less than 1 part Portland cement, Type II, to 2 parts, by weight, of clean, well-graded sand which shall pass a 1/8-inch screen. Exterior joints shall be banded with a cloth or paper diaper and the grout poured and rodded into one side only until it appears on the opposite side of the pipe. Grouting shall be completed before backfill and shall completely fill the exterior annular space between pipe ends.

9. CURING AND PROTECTION

Curing of pipe during manufacture shall be in accordance with the appropriate sections of the applicable Specifications governing the manufacture of the pipe. Prevention of drying out of the joint protective mortar in pipe with rubber gasket joints by circulation of air within the pipeline shall be accomplished by immediately sealing all openings in the pipeline by a method approved the Engineer. Notwithstanding any of the provisions of these Specifications, the Contractor shall be responsible for proper curing of the joints and protection of the pipeline.

10. SHOP DRAWINGS

Shop Drawings showing the piping lay diagrams, individual pipe joint dimensions and reinforcing steel size and placement shall be submitted to the Engineer for review prior to fabrication of the pipe.

11. CLEANING AND FLUSHING

After all backfilling is completed and manhole frames and covers set, but prior to placement of paving material, the Contractor shall clean and flush all lines.

To clean and flush gravity drainage pipes 12 inches or less in diameter, the Contractor shall furnish and use a heavy rubber ball manufactured for this purpose and approved by the Engineer. When inflated with air, it should have an outside diameter equal to the interior diameter of the pipe to be cleaned. The ball shall be placed in the uppermost structure of the line to be cleaned and then water shall be introduced into the structure in back of the ball. The ball shall pass through the pipe with only the pressure of the water behind it. The rate at which the ball is allowed to pass through the pipe shall be controlled by a rope attached to the ball at the times.

This procedure shall be utilized on each section of pipe installed. Care shall be exercised to feed the ball slow enough to allow debris to be removed in a manner acceptable to the Engineer.

12. MEASUREMENT AND PAYMENT

Measurement and payment for storm drainage pipelines shall be in accordance with Section 5-3 of these Specifications.

Manholes shall be measured per completed unit and paid for at the applicable unit price bid therefore in the Bid Schedule.

END OF SECTION

SECTION 8 SANITARY SEWER PIPELINES

1. GENERAL

The Contractor shall furnish and install all sanitary sewer pipe in accordance with the Drawings and with these Specifications.

2. MATERIALS

Sewer pipe and sewer services shall be polyvinyl chloride pipe meeting ASTM Designation D3034 SDR35.

The pipe shall be jointed with an integral bell, bell-and spigot type rubber gasketed joint. Each integral bell shall consist of a formed bell complete with a single rubber gasket. Gaskets shall conform to A.S.T.M. F477.

Fittings shall be of the same composition as the pipe as described in A.S.T.M. D1784.

Sewer Installation shall be in accordance with A.S.T.M. D2321 and the manufacturers recommendations except water stops at manhole connections shall be made with rubber gaskets only.

3. MANHOLES

Manholes shall be located and constructed as shown on the DRAWINGS. All manholes shall conform to the requirements of ASTM C478. Joints in concrete manholes sections shall be completely filled with Portland Cement mortar.

The cement used for mortar shall conform to ASTM C150, Type II. Water for cement mortar shall be clean and free from injurious amounts of oil, alkali, organic matter or other deleterious substances. Mortar sand shall consist of clean, hard, sharp-grained particles, all passing a No. 4 sieve. Mortar shall consist of one part by volume of cement, one and one-half parts by volume of sand with sufficient water added to bring the mixture to a workable consistency. Mortar which has begun to set shall not be used. All joints shall be water tight. Particular care must be taken to protect the manholes from damage and to keep rock, dirt and debris from getting into the sewer.

Manhole frames and covers shall be as shown on Drawings and shall meet the requirements of ASTM A48. Frames and covers shall be machined where they bear one on another to ensure a close fit so as not to be loose and wobbly.

4. SEWER SERVICE CONNECTIONS

Existing sewer services shall be removed from the existing sewer line and transferred (reconnected) to the new sewer line. Reconnected sewer services will be shorter than existing. The abandoned portion of the existing sewer service shall be plugged (concrete plug).

Provide watertight connection at existing services and connect as required per field conditions.

Disconnect existing sewerlines form system as shown on the plans, remove and dispose of designated pipelines to clear existing alignment for the installation of the new pipe.

5. TESTING

All sewer pipe shall be air tested for leakage. Testing shall be performed to segments between adjacent manholes.

Testing procedure shall be as follows:

Pressurize the test section to 3.5 psi and hold above 3.0 psi for not less than five (5) minutes. Add air if necessary to keep the pressure above 3.0 psi. At the end of this five (5) minute saturation period, note the pressure (must be 3.0 psi min.) and begin the time period. If the pressure drops 0.5 psi in less time than the time given in the following table, the section of pipe shall not have passed the test.

Pipe Diameter	Minimum Time (min:sec)	Length for Minimum time (ft)	Time for Longer Length (sec)
6 inches	2:50	398	.427L
8 inches	3:47	298	.760L

If the time for the pressure to drop 0.5 psi is 125% or less than the time indicated, the line shall immediately be repressurized to 3.0 psig and the test repeated. If, during the five (5) minute saturation period, the pressure drops less than 0.5 psi after the initial pressurization and air is not added, the section undergoing the test shall have passed.

For sections that fail testing, leaks shall be found and repaired to the satisfaction of the Engineer, and then retested.

It is the Contractor's responsibility to furnish all the testing apparatus. The pressure gauge used shall have a minimum incremental reading of 0.10 psi and shall have an accuracy of 0.04 psi. If required by the Engineer, the Contractor shall supply a valid gauge calibration certification performed by a reputable instrument testing firm.

6. MEASUREMENT AND PAYMENT

Measurement and payment for sanitary sewer pipelines, cleanouts, sewer manholes, and sewer service reconnections, shall not be measured for payment. Payment shall be included in the applicable lump sum price bid in the Bid Schedule.

Payment shall include compensation for demolition, temporary bypass, elbows, fittings, connections, sawcutting, trenching, backfilling, compacting, placement of aggregate base, asphalt concrete removal and replacement, concrete work, all other incidental work for complete in place facilities and no additional payment will be made therefor.

SECTION 9 THERMOPLASTIC

1. GENERAL

Thermoplastic traffic striping and traffic markings shall be applied in accordance with the Drawings. Exact locations of striping and markings shall be as shown on the Drawings or as determined by the Engineer. Removal of existing striping and/or markings shall be done by grinding and vacuuming.

2. MATERIALS

Thermoplastic traffic stripes and pavement markings shall be in accordance with Section 84-2 of the State of California, Department of Transportation, Standard Specifications. All thermoplastic stripes and pavement markings shall contain glass beads.

3. MEASUREMENT AND PAYMENT

Thermoplastic will not be measured for payment. Payment shall be included in the applicable lump sum price in the Bid Schedule and shall include all compensation for removal of existing striping/markings, application of thermoplastic and all other appurtenant work.

END OF SECTION

SECTION 10
PAINTED TRAFFIC STRIPES AND MARKINGS

1. GENERAL

Painted traffic striping and markings shall be applied in accordance with the Drawings. Exact locations of striping and markings shall be as shown on the Drawings or as determined by the Engineer. Removal of existing striping and markings shall be done by grinding and vacuuming.

2. MATERIALS

Painted traffic stripes and pavement markings shall be in accordance with Section 84-3 of the State of California, Department of Transportation, Standard Specifications. All painted stripes and pavement markings shall contain glass beads.

3. MEASUREMENT AND PAYMENT

Painted traffic stripes and markings will not be measured for payment. Payment shall be included in the applicable lump sum price in the Bid Schedule and shall include all compensation for removal of existing striping/markings, application of stripes and markings, and all other appurtenant work.

GENERAL NOTES

- EXISTING UTILITY LOCATIONS ARE SHOWN BASED ON USA MARKINGS COLLECTED IN THE FIELD AND RECORD INFORMATION. ACTUAL BUILT LOCATIONS MAY VARY. THE ENGINEER DOES NOT GUARANTEE THE LOCATIONS OF EXISTING UTILITIES SHOWN ON THESE PLANS TO BE EITHER TRUE OR EXACT. THE CONTRACTOR SHALL VERIFY ACTUAL DEPTH AND EXACT LOCATION OF EXISTING UTILITIES PRIOR TO EXCAVATION ACTIVITIES. CONTRACTOR SHALL EXERCISE EXTREME CAUTION WHILE EXCAVATING IN AREAS NEAR NATURAL GAS, TV, PHONE, AND OTHER EXISTING UTILITIES AND IS RESPONSIBLE FOR ALL COSTS RELATED TO DAMAGED LINES OR DISRUPTION OF SERVICE CAUSED BY ANY ACTIVITIES AS THEY RELATE TO THIS PROJECT.
- CONTRACTOR SHALL BE AWARE OF EXISTING OVERHEAD UTILITY LINES AND SHALL EXERCISE CAUTION WHILE WORKING NEAR SUCH LINES. OVERHEAD UTILITY LINES HAVE BEEN OMITTED FROM PLANS FOR CLARITY PURPOSES.
- CONTRACTOR SHALL EXERCISE CARE TO MINIMIZE DAMAGE TO FACILITIES ADJACENT TO PROJECT IMPROVEMENTS SUCH AS EQUIPMENT, FENCING, CONCRETE FLATWORK, LANDSCAPING, LANDSCAPE IRRIGATION, ECT., DESIGNATED TO REMAIN.
- ANY FACILITIES DAMAGED BY THE CONTRACTOR SHALL BE RESTORED IN KIND AT NO COST TO THE CITY TO THEIR ORIGINAL PRE-CONSTRUCTION CONDITION OR BETTER. DISTURBED AND DAMAGED SURFACES SHALL BE RESTORED AFTER ALL CONSTRUCTION IS COMPLETE AND PRIOR TO CITY ACCEPTANCE.
- UTILITY CONFLICTS ARE TO BE WORKED OUT IN THE FIELD WITH THE PROJECT ENGINEER AND CITY REPRESENTATIVE.
- MAINTAIN 1 FOOT OF UNDISTURBED SOIL OR PLACE SIFTING BARRIER DURING CONSTRUCTION AS REQUIRED BY PG&E. PG&E WILL INSPECT FOR DAMAGE TO EXISTING GAS UTILITY. IF FOUND, CONTRACTOR SHALL REPAIR AT HIS OWN EXPENSE. THE CONTRACTOR IS RESPONSIBLE FOR CONTACTING STEVE MURPHY AT (209) 726-6338 FOR INSPECTION OF PG&E GAS UTILITIES DURING CONSTRUCTION.
- THE CONTRACTOR IS RESPONSIBLE FOR MAINTAINING WATER SERVICE TO RESIDENTS AT ALL TIMES EXCEPT WHEN SHUTDOWN IS REQUIRED FOR INSTALLATION OF NEW WATERLINE. COORDINATE SHUTDOWN WITH CITY AT LEAST 48 HOURS IN ADVANCE.
- WHERE THE PROPOSED WATERLINE COMES IN CONFLICT WITH EXISTING WET UTILITIES OR DRY UTILITIES, IT IS REQUIRED TO BE DIPPED UNDER THOSE SERVICES UNLESS IT CAN BE ROUTED IN SUCH A WAY AS TO MAINTAIN 36" OF COVER AND 12" OF SEPARATION FROM THE CONFLICTING UTILITY PIPE.
- ALL EXISTING WATER SERVICES ARE TO BE TRANSFERRED FROM THE EXISTING LINE EVEN IF NOT SHOWN OR ACCOUNTED FOR IN THE PROJECT PLANS AND SPECIFICATIONS.
- THE EXISTING WATERLINE IS TO BE ABANDONED IN PLACE UNLESS OTHERWISE NOTED ON THESE PLANS.
- EXISTING SALVAGED VALVES AND FIRE HYDRANTS TO BECOME PROPERTY OF THE OWNER.
- WHERE THE EDGE OF THE TRENCH SECTION PARALLELS THE EXISTING CURB AND GUTTER AND IS WITHIN 18" OF THE EXISTING LIP OF GUTTER, THE PAVEMENT SHALL BE REMOVED AND REPLACED TO THE LIP OF GUTTER. REPLACE AB DISTURBED BY CONSTRUCTION.
- IN INSTANCES WHERE PAVING EXTENDS BEYOND THE LIMITS OF THE TRENCH PATCH, IMPACTED FACILITIES SUCH AS EXISTING UTILITY FRAMES AND COVERS SHALL BE RAISED TO GRADE.
- CONSTRUCTION TRENCHES THAT ARE REQUIRED TO REMAIN OPEN OVERNIGHT MUST HAVE STEEL TRAFFIC PLATE(S) SECURELY INSTALLED WITH A TEMPORARY ASPHALT TRANSITION ALONG ALL EDGES CAPABLE OF HANDLING VEHICLE TRAFFIC FOR THE TIME PERIOD THE PLATE IS IN PLACE.

GENERAL NOTES

- CONTRACTOR SHALL FURNISH AND OPERATE NECESSARY PUMPING AND BYPASS EQUIPMENT TO MAINTAIN WATER AND SEWER SERVICE DURING WORKING HOURS. SEWER BYPASS WILL NOT BE ALLOWED OVERNIGHT. CONTRACTOR SHALL CONNECT AND CONCEAL SEWER LINE IMPROVEMENTS AT THE END OF EACH WORKING DAY.
- MAINTAIN SEWER SERVICE TO RESIDENTS AT ALL TIMES EXCEPT WHEN SHUTDOWN IS REQUIRED FOR INSTALLATION OF NEW SEWER LINE. COORDINATE SHUTDOWN WITH CITY AT LEAST 48 HOURS IN ADVANCE.
- ALL EXISTING SEWER SERVICES ARE TO BE TRANSFERRED FROM THE EXISTING LINES EVEN IF NOT SHOWN OR ACCOUNTED FOR IN THE PROJECT PLANS AND SPECIFICATIONS.
- MAINTAIN A MINIMUM CLEARANCE OF 12 INCHES AT ALL UTILITY CROSSINGS. CONTRACTOR SHALL COMPLY WITH WATER AND SEWER SEPARATION REQUIREMENTS PER CITY OF LOS BANOS STANDARDS AND DEPARTMENT OF WATER RESOURCES, DRINKING WATER PROGRAM REGULATIONS UNLESS OTHERWISE NOTED ON THESE PLANS.

ABBREVIATIONS

ABBREVIATIONS	DESCRIPTION
±	PLUS OR MINUS (NOT EXACT)
AT	AT
AB	AGGREGATE BASE
AC	ASPHALT CONCRETE
ACP	ASBESTOS CEMENT PIPE
AP	ANGLE POINT
ARV	AIR RELEASE VALVE
BC	BEGINNING OF CURVE
BNDY	BOUNDARY
BO	BLOW-OFF
BP	BYPASS
BOW	BACK OF SIDEWALK
CL	CENTERLINE
C&G	CURB AND GUTTER
CB OR CBSN	CATCH BASIN
CLR	CLEAR
CO	CLEAN OUT
CLB	CITY OF LOS BANOS
C OR CONC	CONCRETE
CONT	CONTINUOUS
CORP	CORPORATION
D OR SD	STORM DRAIN
Ø OR DIA	DIAMETER
EA	EACH
EC	END OF CURVE
EG	EXISTING GROUND
EL	ELBOW
ELEV	ELEVATION
EP	EDGE OF PAVEMENT
EQ	EQUAL OR EQUIVALENT
EX OR EXIST	EXISTING
EW	EACH WAY
FH	FIRE HYDRANT
FL	FLOW LINE
FOC	FACE OF CURB
FT	FOOT OR FEET
GB	GRADE BREAK
HDPE	HIGH DENSITY POLYETHYLENE
HCL	HYDRAULIC GRADE LINE
HORIZ	HORIZONTAL
HP	HIGH POINT
ID	INSIDE DIAMETER
INV	INVERT
IRR	IRRIGATION
LF	LINEAL FEET OR LINEAR FEET
LT	LEFT
MAX	MAXIMUM
MH	MAINTENANCE HOLE
MIN	MINIMUM
N	NORTH
NO OR #	NUMBER
NTS	NOT TO SCALE
OC OR O.C.	ON CENTER
OD	OUTSIDE DIAMETER
PI	POINT OF INTERSECTION
PL	PROPERTY LINE
PSI	POUNDS PER SQUARE INCH
PT	POINT
PVC	POLYVINYL CHLORIDE PIPE
R	RADIUS
R/W	RIGHT OF WAY
RCP	REINFORCED CONCRETE PIPE
RT	RIGHT
SW	SIDEWALK
SCH	SCHEDULE
SDMH	STORM DRAIN MAINTENANCE HOLE
SF	SQUARE FEET
SHT	SHEET
SQ	SQUARE
SS OR S	SANITARY SEWER
SSMH	SANITARY SEWER MAINTENANCE HOLE
STA	STATION
STD	STANDARD
TEMP	TEMPORARY
TYP	TYPICAL
VERT	VERTICAL
W	WATER
WV	WATER VALVE

LEGEND

	EXISTING	PROPOSED
COMMUNICATIONS LINE	--- COM ---	
OVERHEAD UTILITY LINE	--- OHL ---	
POWER POLE		
SERVICE POLE		
STREET LIGHT		
GAS VALVE		
GAS LINE	--- G ---	
WATER METER		
SEWER CLEAN OUT		
SANITARY SEWER MANHOLE		
STORM DRAIN MANHOLE		
DRAIN INLET		
STREET SIGN		
MONUMENT WELL		
CONTOUR ELEVATION	109.50	
SPOT ELEVATION		
SAWCUT LINE		
FIRE HYDRANT		
PIPE LINE PLUG		
WATER VALVE		
CONCRETE		

FOR CLARITY PURPOSES SYMBOLS SHOWN IN THE LEGEND MAY APPEAR SMALLER THAN SHOWN ON THE PLANS.



Apr 03, 2015 - 1:31pm
V:\CL_B\04\02\cas\plan\84002C-101.dwg



REV	DATE	DESCRIPTION	APPR

OWNERSHIP OF DOCUMENTS
THIS DOCUMENT, AND THE CONCEPTS AND DESIGNS PRESENTED HEREIN, AS AN INSTRUMENT OF SERVICE, IS THE PROPERTY OF GOUVEIA ENGINEERING, INC., AND IS INTENDED ONLY FOR THE SPECIFIC PURPOSE AND CLIENT FOR WHICH IT WAS PREPARED. REUSE, IN WHOLE OR IN PART, IS NOT PERMITTED WITHOUT WRITTEN AUTHORIZATION BY GOUVEIA ENGINEERING, INC.

GOUVEIA ENGINEERING, INC.
CONSULTING ENGINEERS
456 Sixth Street • Custine, California 95322
Telephone (209) 854-3300 • Fax (209) 854-3600

CITY OF LOS BANOS
HENRY MILLER AREA STORM DRAIN AND L STREET WATERLINE
GENERAL NOTES, ABBREVIATIONS, AND LEGEND

DESIGNED BY NWF, DGR	DATE 03/27/2015	DRAWING C-102
DRAWN BY NWF, AMT, DGR	DATE 04/02/2015	SHEET 2
CHECKED BY M. GOUVEIA	DATE 04/02/2015	OF 27 SHEETS
APPROVED M. GOUVEIA	DATE 04/03/2015	PROJECT NUMBER 835.02, 840.02

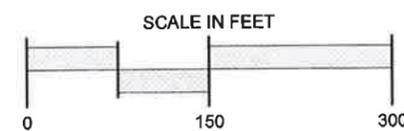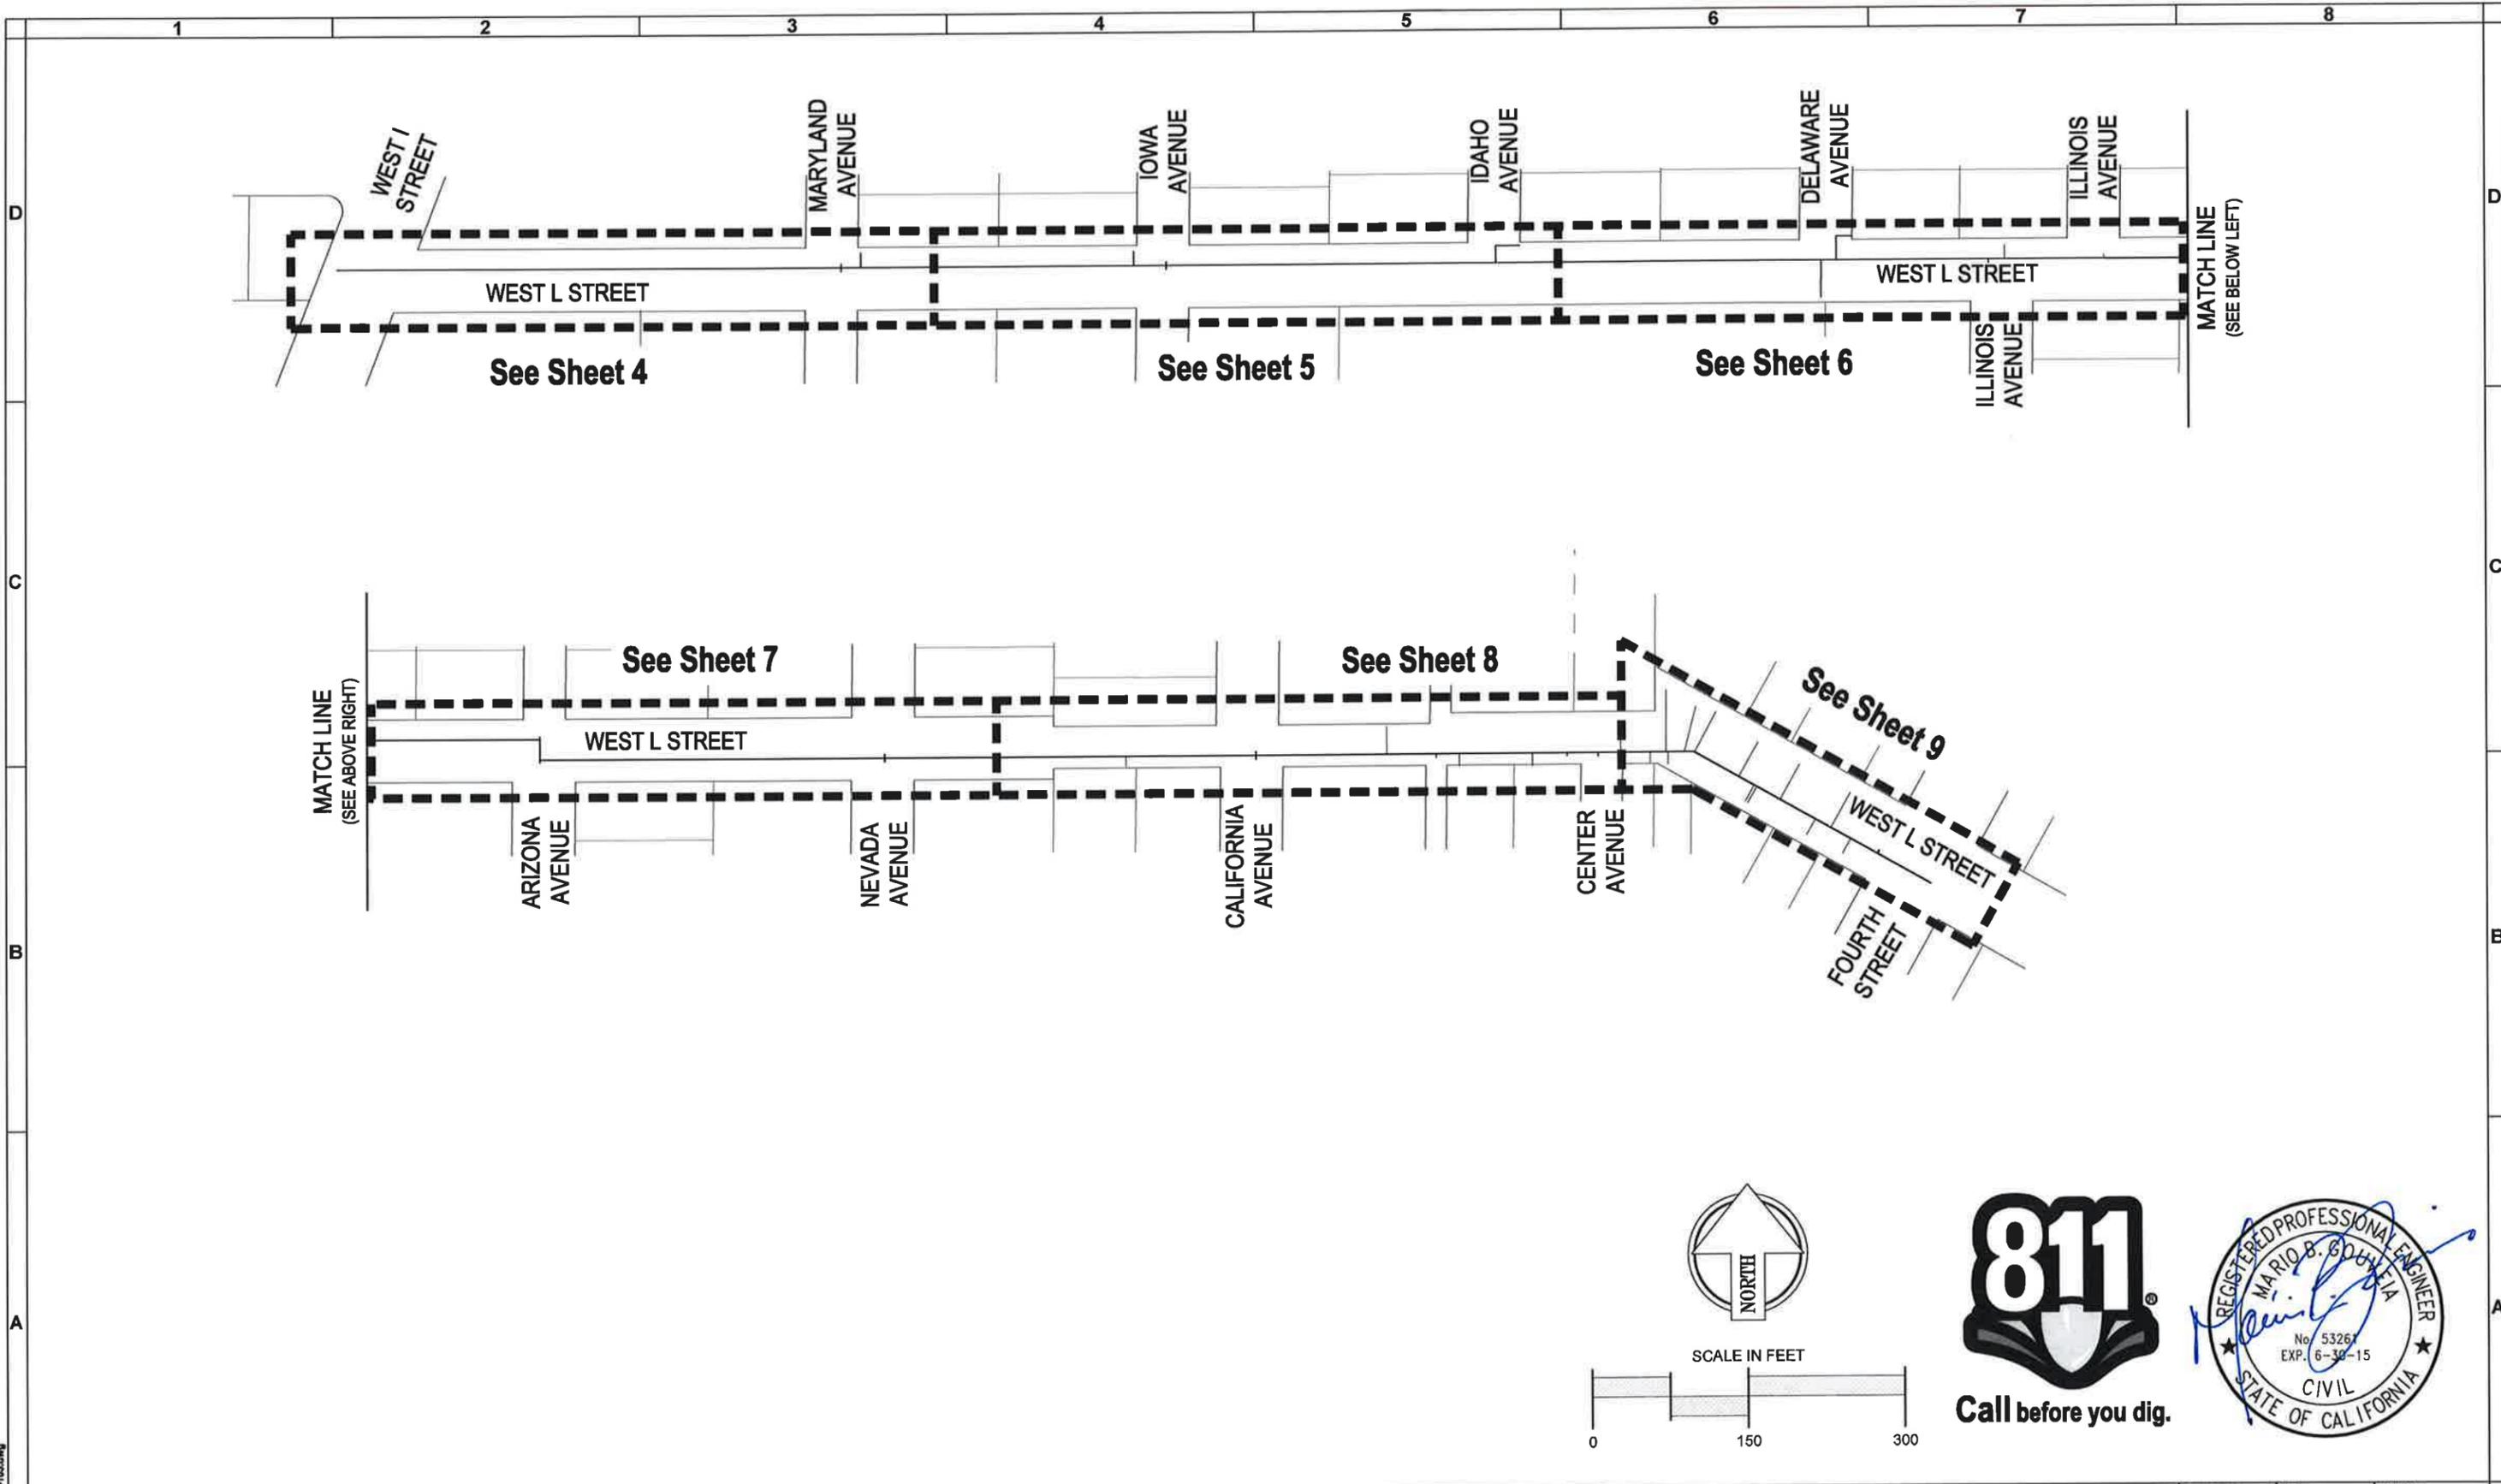

Apr 03, 2015 - 1:33pm
V:\CL\B\02\103\plan\84002C-103.dwg


REV	DATE	DESCRIPTION	APPR

OWNERSHIP OF DOCUMENTS
 THIS DOCUMENT, AND THE CONCEPTS AND DESIGNS PRESENTED HEREIN, AS AN INSTRUMENT OF SERVICE, IS THE PROPERTY OF GOUVEIA ENGINEERING, INC., AND IS INTENDED ONLY FOR THE SPECIFIC PURPOSE AND CLIENT FOR WHICH IT WAS PREPARED. REUSE, IN WHOLE OR IN PART, IS NOT PERMITTED WITHOUT WRITTEN AUTHORIZATION BY GOUVEIA ENGINEERING, INC.

GOUVEIA ENGINEERING, INC.
 CONSULTING ENGINEERS
 456 Sixth Street • Gustine, California 95322
 Telephone (209) 854-3300 • Fax (209) 854-3600

CITY OF LOS BANOS
HENRY MILLER AREA STORM DRAIN AND L STREET WATERLINE
WEST L STREET WATERLINE KEY SHEET


DESIGNED BY NWF, DGR	DATE 03/27/2015	DRAWING C-103
DRAWN BY NWF, AMT, DGR	DATE 04/02/2015	SHEET 3
CHECKED BY M. GOUVEIA	DATE 04/02/2015	OF 27 SHEETS
APPROVED M. GOUVEIA	DATE 04/03/2015	PROJECT NUMBER 835.02, 840.02

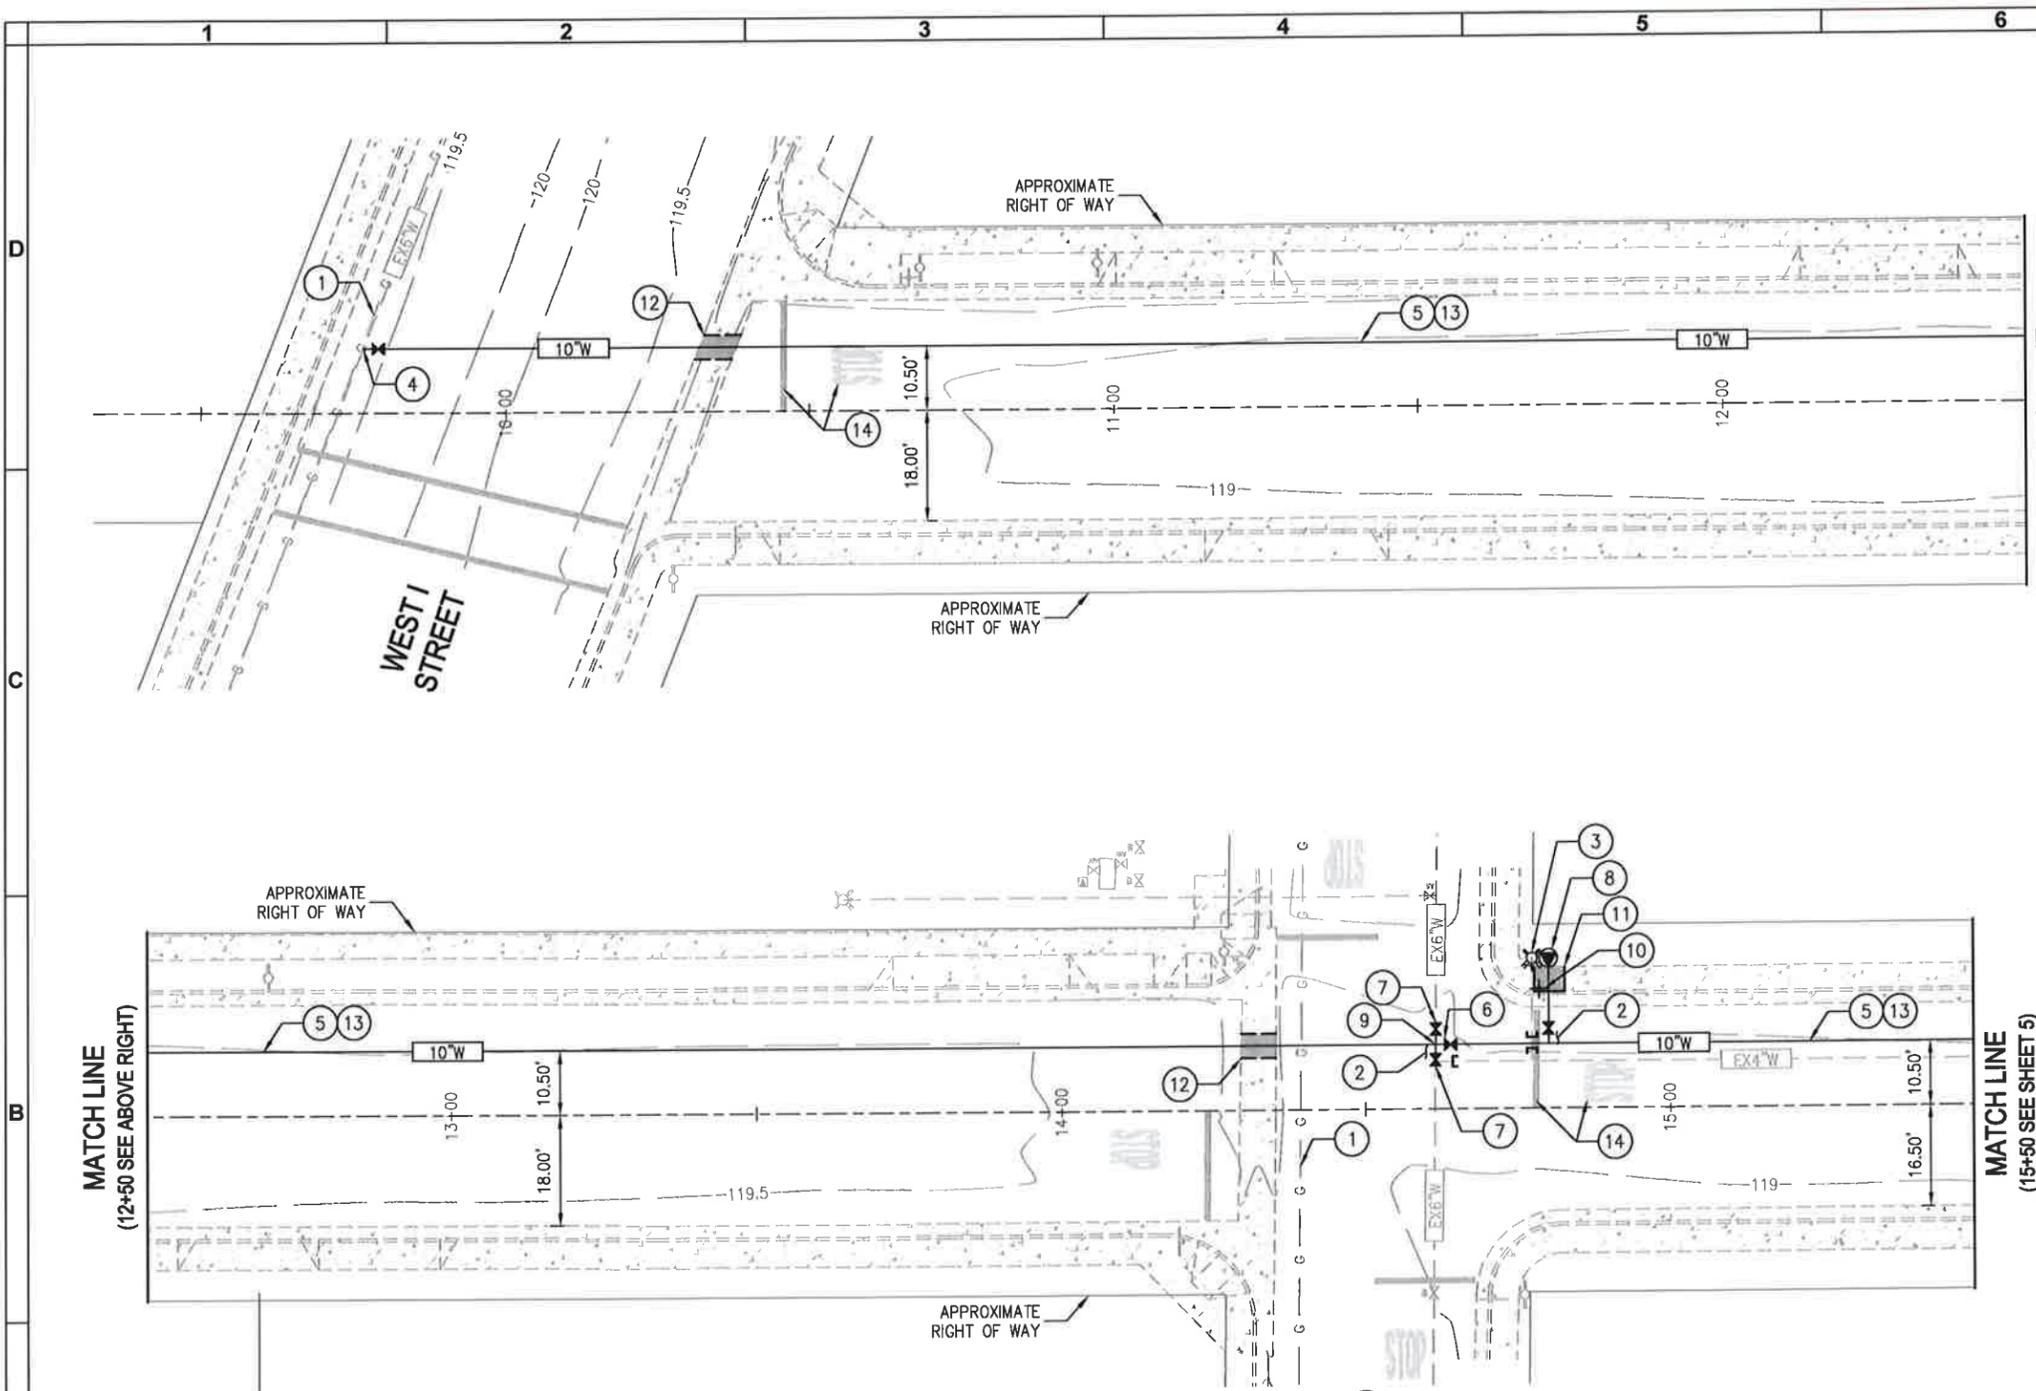

CONSTRUCTION NOTES		REFERENCE DETAIL
<u>UNDERGROUND IMPROVEMENTS</u>		
①	LOCATE AND PROTECT EXISTING GAS LINE IN PLACE. REMOVE OR CRUSH IN PLACE THE EXISTING PIPE SECTION TO ALLOW INSTALLATION OF THE NEW WATERLINE. AT PIPE CROSSINGS, 12" OF CLEARANCE AS MEASURED FROM THE OUTER WALL OF THE NEW WATERLINE TO THE END OF THE REMOVED OR CRUSHED PIPE SECTION IS REQUIRED. INSTALL CONCRETE PLUG IN THE OPEN END OF THE EXISTING PIPE SECTION TO REMAIN IN PLACE.	
②	REMOVE AND SALVAGE EXISTING FIRE HYDRANT, CUT AND CAP PIPE 4" BELOW TOP OF SIDEWALK GRADE AND CONSTRUCT CONCRETE REPAIR.	
③	HOT TAP AND CONNECT TO EXISTING FACILITIES.	
④	INSTALL 10" WATERLINE WITH 2'-6" MIN. OF COVER.	① 22
⑤	INSTALL 10" WATER VALVE.	② 23
⑥	INSTALL 10" TO 6" REDUCER AND 6" WATER VALVE. CONNECT TO EXISTING FACILITIES.	① 23
⑦	INSTALL NEW FIRE HYDRANT ASSEMBLY.	② 22
⑧	INSTALL 10" CROSS AND THRUST BLOCKS.	⑤ 26
<u>SURFACE IMPROVEMENTS</u>		
⑩	EXISTING SIGN AND POST TO BE REMOVED AND REINSTALLED BEHIND BACK OF SIDEWALK. INSTALL EXISTING SIGN LEGEND(S) ON NEW POST.	① 26
⑪	REMOVE AND REPLACE SIDEWALK TO THE PANELS NEAREST JOINT AS REQUIRED FOR FIRE HYDRANT ASSEMBLY INSTALLATION.	③ 26
⑫	REMOVE AND REPLACE VALLEY GUTTER AS REQUIRED FOR PIPELINE INSTALLATION.	① 22
⑬	REMOVE AND REPLACE EXISTING AC WITHIN TRENCH AREA. TRENCH AREA EDGES ARE TO BE SAWCUT. AC MAY BE PULVERIZED AND REUSED AS BASE BELOW AB.	
⑭	REMOVE AND REAPPLY "STOP" MARKING AND STOP BAR.	

ESTIMATED QUANTITIES	
HOT TAP TO EXISTING WATERLINE	1 EA
INSTALL 10" WATERLINE	575 LF
INSTALL 10" VALVE	1 EA
INSTALL 6" VALVE	2 EA
INSTALL FIRE HYDRANT ASSEMBLY	1 EA
REMOVE AND REPLACE SIDEWALK	20 SF
REMOVE AND REPLACE VALLEY GUTTER	48 SF
RELOCATE SIGN	1 EA
THERMOPLASTIC MARKINGS	78 SF

MARYLAND AVENUE

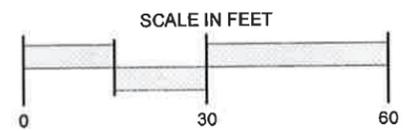

Call before you dig.



Apr 03, 2015 - 1:33pm
V:\CL\B\402\15\1504\1504002C-105.dwg


REV	DATE	DESCRIPTION	APPR

OWNERSHIP OF DOCUMENTS
THIS DOCUMENT, AND THE CONCEPTS AND DESIGNS PRESENTED HEREIN, AS AN INSTRUMENT OF SERVICE, IS THE PROPERTY OF GOUVEIA ENGINEERING, INC., AND IS INTENDED ONLY FOR THE SPECIFIC PURPOSE AND CLIENT FOR WHICH IT WAS PREPARED. REUSE, IN WHOLE OR IN PART, IS NOT PERMITTED WITHOUT WRITTEN AUTHORIZATION BY GOUVEIA ENGINEERING, INC.

GOUVEIA ENGINEERING, INC.
CONSULTING ENGINEERS
456 Sixth Street • Gustine, California 95322
Telephone (209) 854-3300 • Fax (209) 854-3600

CITY OF LOS BANOS
HENRY MILLER AREA STORM DRAIN AND L STREET WATERLINE IMPROVEMENTS STA. 10+00 TO 15+50

DESIGNED BY NWF, DGR	DATE 03/27/2015	DRAWING C-104
DRAWN BY NWF, AMT, DGR	DATE 04/02/2015	SHEET 4
CHECKED BY M. GOUVEIA	DATE 04/02/2015	OF 27 SHEETS PROJECT NUMBER 835.02, 840.02
APPROVED M. GOUVEIA	DATE 04/03/2015	

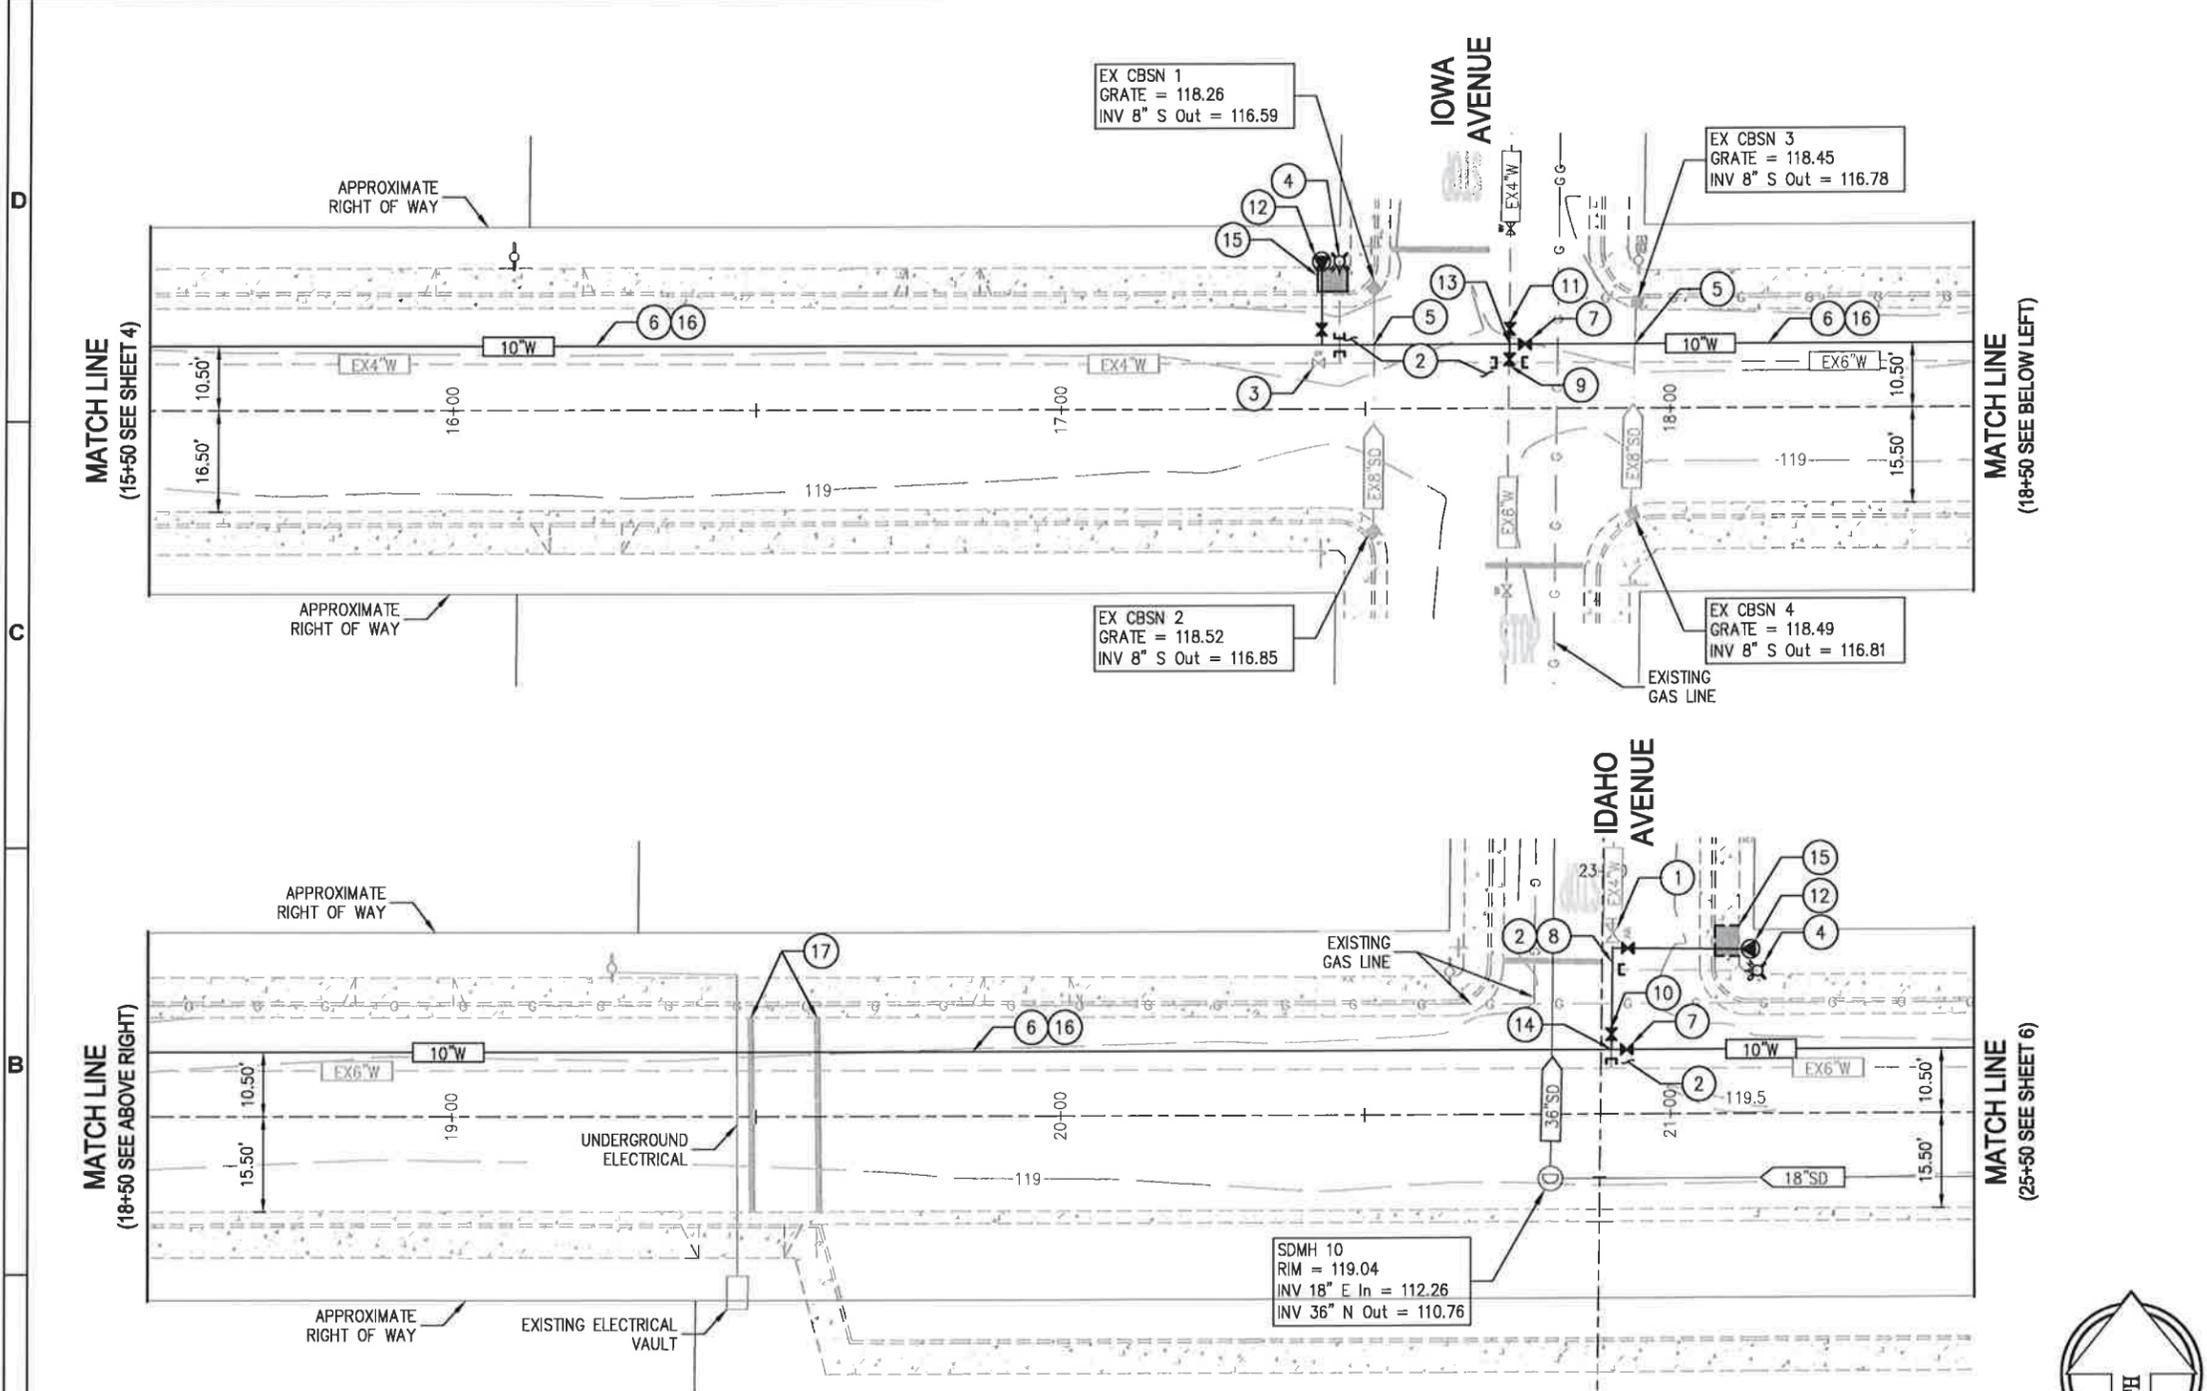


- ### CONSTRUCTION NOTES
- UNDERGROUND IMPROVEMENTS**
- EXISTING WATER VALVE TO REMAIN AND BE PROTECTED.
 - REMOVE OR CRUSH IN PLACE THE EXISTING PIPE SECTION TO ALLOW INSTALLATION OF THE NEW WATERLINE. AT PIPE CROSSINGS, 12" OF CLEARANCE AS MEASURED FROM THE OUTER WALL OF THE NEW WATERLINE TO THE END OF THE REMOVED OR CRUSHED PIPE SECTION IS REQUIRED. INSTALL CONCRETE PLUG IN THE OPEN END OF THE EXISTING PIPE SECTION TO REMAIN IN PLACE.
 - VALVE TO REMAIN AND BE ABANDONED IN PLACE. THE PROCESS FOR ABANDONING THE VALVE IS:
 - THE VALVE IS TO BE PLACED IN THE CLOSED POSITION.
 - THE BOX IS TO BE REMOVED.
 - THE HOLE IS TO BE BACKFILLED AND THE PAVEMENT PATCHED.
 - REMOVE AND SALVAGE EXISTING FIRE HYDRANT, CUT AND CAP PIPE 4" BELOW TOP OF SIDEWALK GRADE AND CONSTRUCT CONCRETE REPAIR.
 - THE 10" WATERLINE MAY HAVE TO BE DIPPED OR ADJUSTED VERTICALLY TO MAINTAIN 12" OF VERTICAL CLEARANCE FROM THE CROSSING UTILITY LINE.
 - INSTALL 10" WATERLINE WITH 2'-6" MIN. OF COVER.
 - INSTALL 10" WATER VALVE.
 - INSTALL 6" WATERLINE AND 6" TO 4" REDUCER. CONNECT TO EXISTING FACILITIES.
 - INSTALL 10" TO 6" REDUCER AND 6" WATER VALVE. CONNECT TO EXISTING FACILITIES.
 - INSTALL 10" TO 6" REDUCER AND 6" WATER VALVE. CONNECT TO NEW 6" WATERLINE.
 - INSTALL 10" TO 4" REDUCER AND 4" WATER VALVE. CONNECT TO EXISTING FACILITIES.
 - INSTALL NEW FIRE HYDRANT ASSEMBLY.
 - INSTALL 10" CROSS AND THRUST BLOCKS.
 - INSTALL 10" TEE AND THRUST BLOCK.
- SURFACE IMPROVEMENTS**
- REMOVE AND REPLACE SIDEWALK TO THE PANELS NEAREST JOINT AS REQUIRED FOR FIRE HYDRANT ASSEMBLY INSTALLATION.
 - REMOVE AND REPLACE EXISTING AC WITHIN TRENCH AREA. TRENCH AREA EDGES ARE TO BE SAWCUT. AC MAY BE PULVERIZED AND REUSED AS BASE BELOW AB.
 - REMOVE AND REAPPLY PEDESTRIAN CROSSWALK 12" LIMIT LINES - 10' CLEAR WIDTH - COLOR TO BE YELLOW.

REFERENCE
DETAIL

- 1/22
- 2/23
- 1/23
- 2/22
- 1/26
- 1/22

ESTIMATED QUANTITIES

INSTALL 10" WATERLINE	600	LF
INSTALL 6" WATERLINE	17	LF
INSTALL 10" VALVE	2	EA
INSTALL 6" VALVE	2	EA
INSTALL 4" VALVE	1	EA
INSTALL FIRE HYDRANT ASSEMBLY	2	EA
REMOVE AND REPLACE SIDEWALK	40	SF
THERMOPLASTIC MARKINGS	69	SF

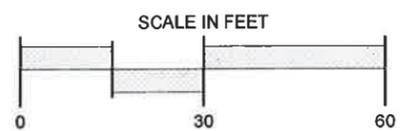

Apr 09, 2015 - 1:38pm
V:\CL\15040702\cal\plan\15040702-105.dwg


REV	DATE	DESCRIPTION	APPR

OWNERSHIP OF DOCUMENTS
THIS DOCUMENT, AND THE CONCEPTS AND DESIGNS PRESENTED HEREIN, AS AN INSTRUMENT OF SERVICE, IS THE PROPERTY OF GOUVEIA ENGINEERING, INC., AND IS INTENDED ONLY FOR THE SPECIFIC PURPOSE AND CLIENT FOR WHICH IT WAS PREPARED. REUSE, IN WHOLE OR IN PART, IS NOT PERMITTED WITHOUT WRITTEN AUTHORIZATION BY GOUVEIA ENGINEERING, INC.

GOUVEIA ENGINEERING, INC.
CONSULTING ENGINEERS
456 Sixth Street • Gustine, California 95322
Telephone (209) 854-3300 • Fax (209) 854-3600


CITY OF LOS BANOS
HENRY MILLER AREA STORM DRAIN AND L STREET WATERLINE WEST L STREET WATERLINE IMPROVEMENTS STA. 15+50 TO 21+50

DESIGNED BY NWF, DGR	DATE 03/27/2015	DRAWING C-105
DRAWN BY NWF, AMT, DGR	DATE 04/02/2015	SHEET 5
CHECKED BY M. GOUVEIA	DATE 04/02/2015	OF 27 SHEETS
APPROVED M. GOUVEIA	DATE 04/03/2015	PROJECT NUMBER 835.02, 840.02

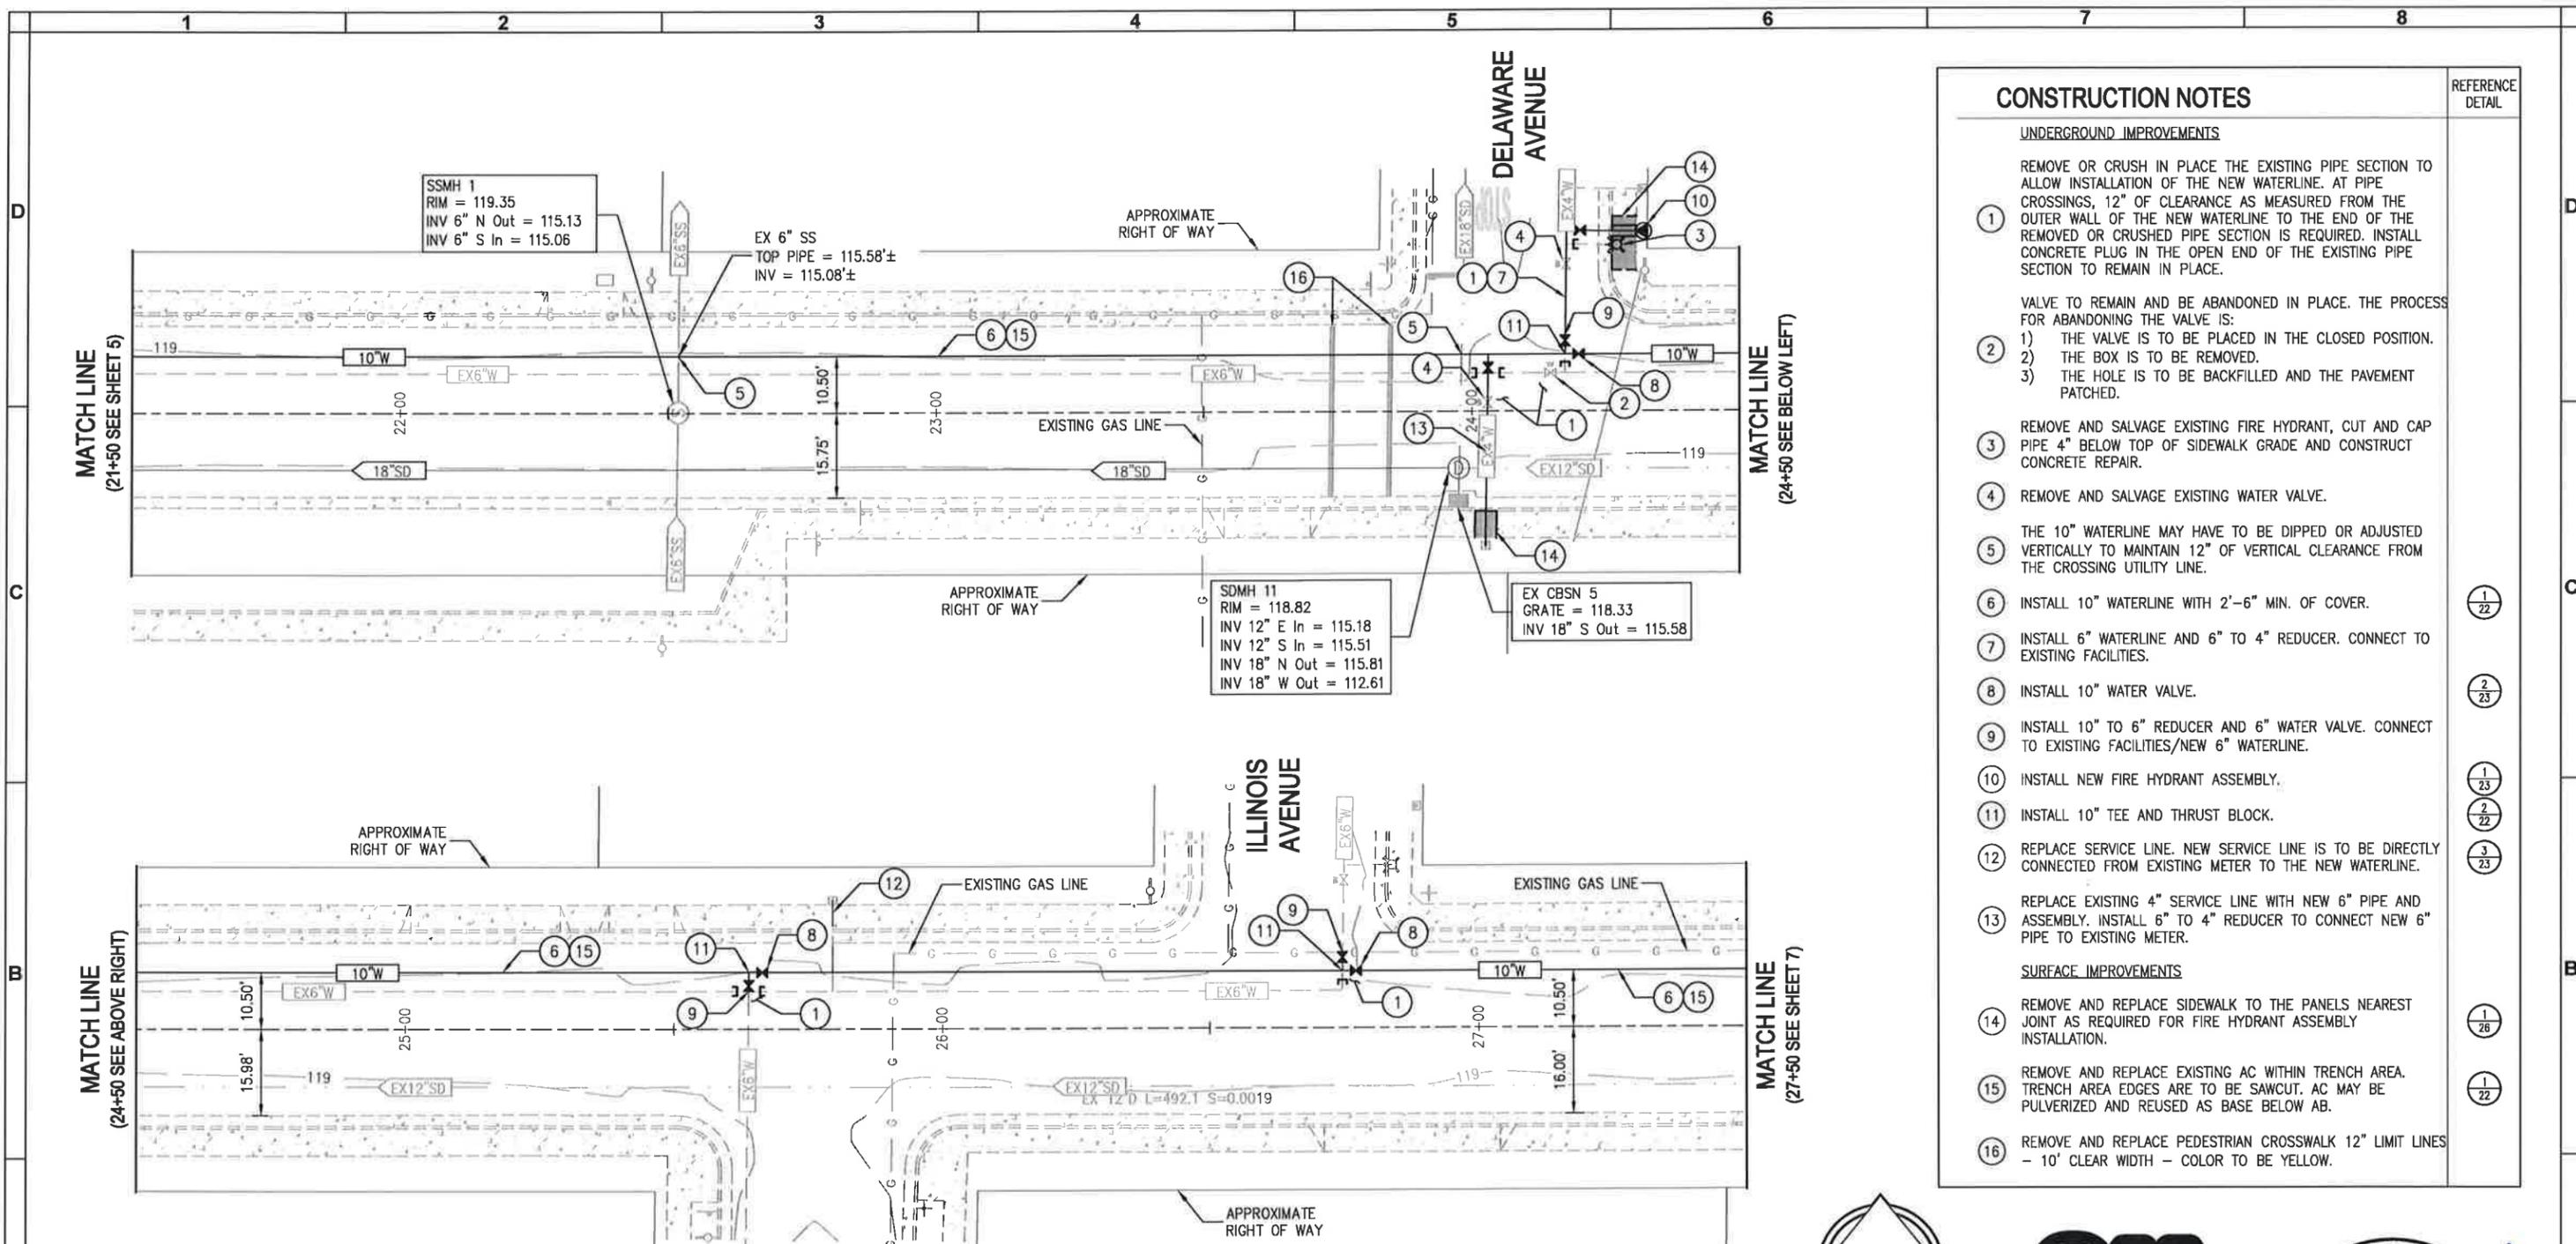

- | CONSTRUCTION NOTES | | REFERENCE DETAIL |
|---|---|------------------|
| UNDERGROUND IMPROVEMENTS | | |
| 1 | REMOVE OR CRUSH IN PLACE THE EXISTING PIPE SECTION TO ALLOW INSTALLATION OF THE NEW WATERLINE. AT PIPE CROSSINGS, 12" OF CLEARANCE AS MEASURED FROM THE OUTER WALL OF THE NEW WATERLINE TO THE END OF THE REMOVED OR CRUSHED PIPE SECTION IS REQUIRED. INSTALL CONCRETE PLUG IN THE OPEN END OF THE EXISTING PIPE SECTION TO REMAIN IN PLACE. | |
| VALVE TO REMAIN AND BE ABANDONED IN PLACE. THE PROCESS FOR ABANDONING THE VALVE IS: | | |
| 2 | 1) THE VALVE IS TO BE PLACED IN THE CLOSED POSITION.
2) THE BOX IS TO BE REMOVED.
3) THE HOLE IS TO BE BACKFILLED AND THE PAVEMENT PATCHED. | |
| 3 | REMOVE AND SALVAGE EXISTING FIRE HYDRANT, CUT AND CAP PIPE 4" BELOW TOP OF SIDEWALK GRADE AND CONSTRUCT CONCRETE REPAIR. | |
| 4 | REMOVE AND SALVAGE EXISTING WATER VALVE. | |
| 5 | THE 10" WATERLINE MAY HAVE TO BE DIPPED OR ADJUSTED VERTICALLY TO MAINTAIN 12" OF VERTICAL CLEARANCE FROM THE CROSSING UTILITY LINE. | |
| 6 | INSTALL 10" WATERLINE WITH 2'-6" MIN. OF COVER. | 1/22 |
| 7 | INSTALL 6" WATERLINE AND 6" TO 4" REDUCER. CONNECT TO EXISTING FACILITIES. | 2/23 |
| 8 | INSTALL 10" WATER VALVE. | 1/23 |
| 9 | INSTALL 10" TO 6" REDUCER AND 6" WATER VALVE. CONNECT TO EXISTING FACILITIES/NEW 6" WATERLINE. | 2/22 |
| 10 | INSTALL NEW FIRE HYDRANT ASSEMBLY. | 3/23 |
| 11 | INSTALL 10" TEE AND THRUST BLOCK. | 1/22 |
| 12 | REPLACE SERVICE LINE. NEW SERVICE LINE IS TO BE DIRECTLY CONNECTED FROM EXISTING METER TO THE NEW WATERLINE. | 1/22 |
| 13 | REPLACE EXISTING 4" SERVICE LINE WITH NEW 6" PIPE AND ASSEMBLY. INSTALL 6" TO 4" REDUCER TO CONNECT NEW 6" PIPE TO EXISTING METER. | |
| SURFACE IMPROVEMENTS | | |
| 14 | REMOVE AND REPLACE SIDEWALK TO THE PANELS NEAREST JOINT AS REQUIRED FOR FIRE HYDRANT ASSEMBLY INSTALLATION. | 1/26 |
| 15 | REMOVE AND REPLACE EXISTING AC WITHIN TRENCH AREA. TRENCH AREA EDGES ARE TO BE SAWCUT. AC MAY BE PULVERIZED AND REUSED AS BASE BELOW AB. | 1/22 |
| 16 | REMOVE AND REPLACE PEDESTRIAN CROSSWALK 12" LIMIT LINES - 10' CLEAR WIDTH - COLOR TO BE YELLOW. | |

ESTIMATED QUANTITIES	
TRANSFER WATER SERVICE	1 EA
REPLACE EXISTING SCHOOL SERVICE PIPE AND ASSEMBLY	1 EA
INSTALL 10" WATERLINE	600 LF
INSTALL 6" WATERLINE	23 LF
INSTALL 10" VALVE	3 EA
INSTALL 6" VALVE	3 EA
INSTALL FIRE HYDRANT ASSEMBLY	1 EA
REMOVE AND REPLACE SIDEWALK	40 SF
THERMOPLASTIC MARKINGS	64 SF

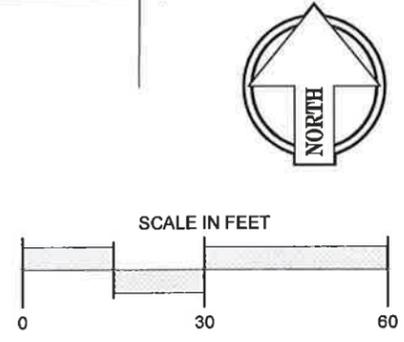

Apr 03, 2015 - 1:37pm
V:\CL\B\040202\cal\plan\main\84002C-105.dwg


REV	DATE	DESCRIPTION	APPR

OWNERSHIP OF DOCUMENTS
THIS DOCUMENT, AND THE CONCEPTS AND DESIGNS PRESENTED HEREIN, AS AN INSTRUMENT OF SERVICE, IS THE PROPERTY OF GOUVEIA ENGINEERING, INC., AND IS INTENDED ONLY FOR THE SPECIFIC PURPOSE AND CLIENT FOR WHICH IT WAS PREPARED. REUSE, IN WHOLE OR IN PART, IS NOT PERMITTED WITHOUT WRITTEN AUTHORIZATION BY GOUVEIA ENGINEERING, INC.

GOUVEIA ENGINEERING, INC.
CONSULTING ENGINEERS
456 Sixth Street • Gustine, California 95322
Telephone (209) 854-3300 • Fax (209) 854-3600


CITY OF LOS BANOS
HENRY MILLER AREA STORM DRAIN AND L STREET WATERLINE IMPROVEMENTS STA. 21+50 TO 27+50

DESIGNED BY	DATE	DRAWING
NWF, DGR	03/27/2015	C-106
DRAWN BY	DATE	SHEET
NWF, AMT, DGR	04/02/2015	6
CHECKED BY	DATE	OF 27 SHEETS
M. GOUVEIA	04/02/2015	PROJECT NUMBER
APPROVED	DATE	835.02, 840.02
M. GOUVEIA	04/03/2015	

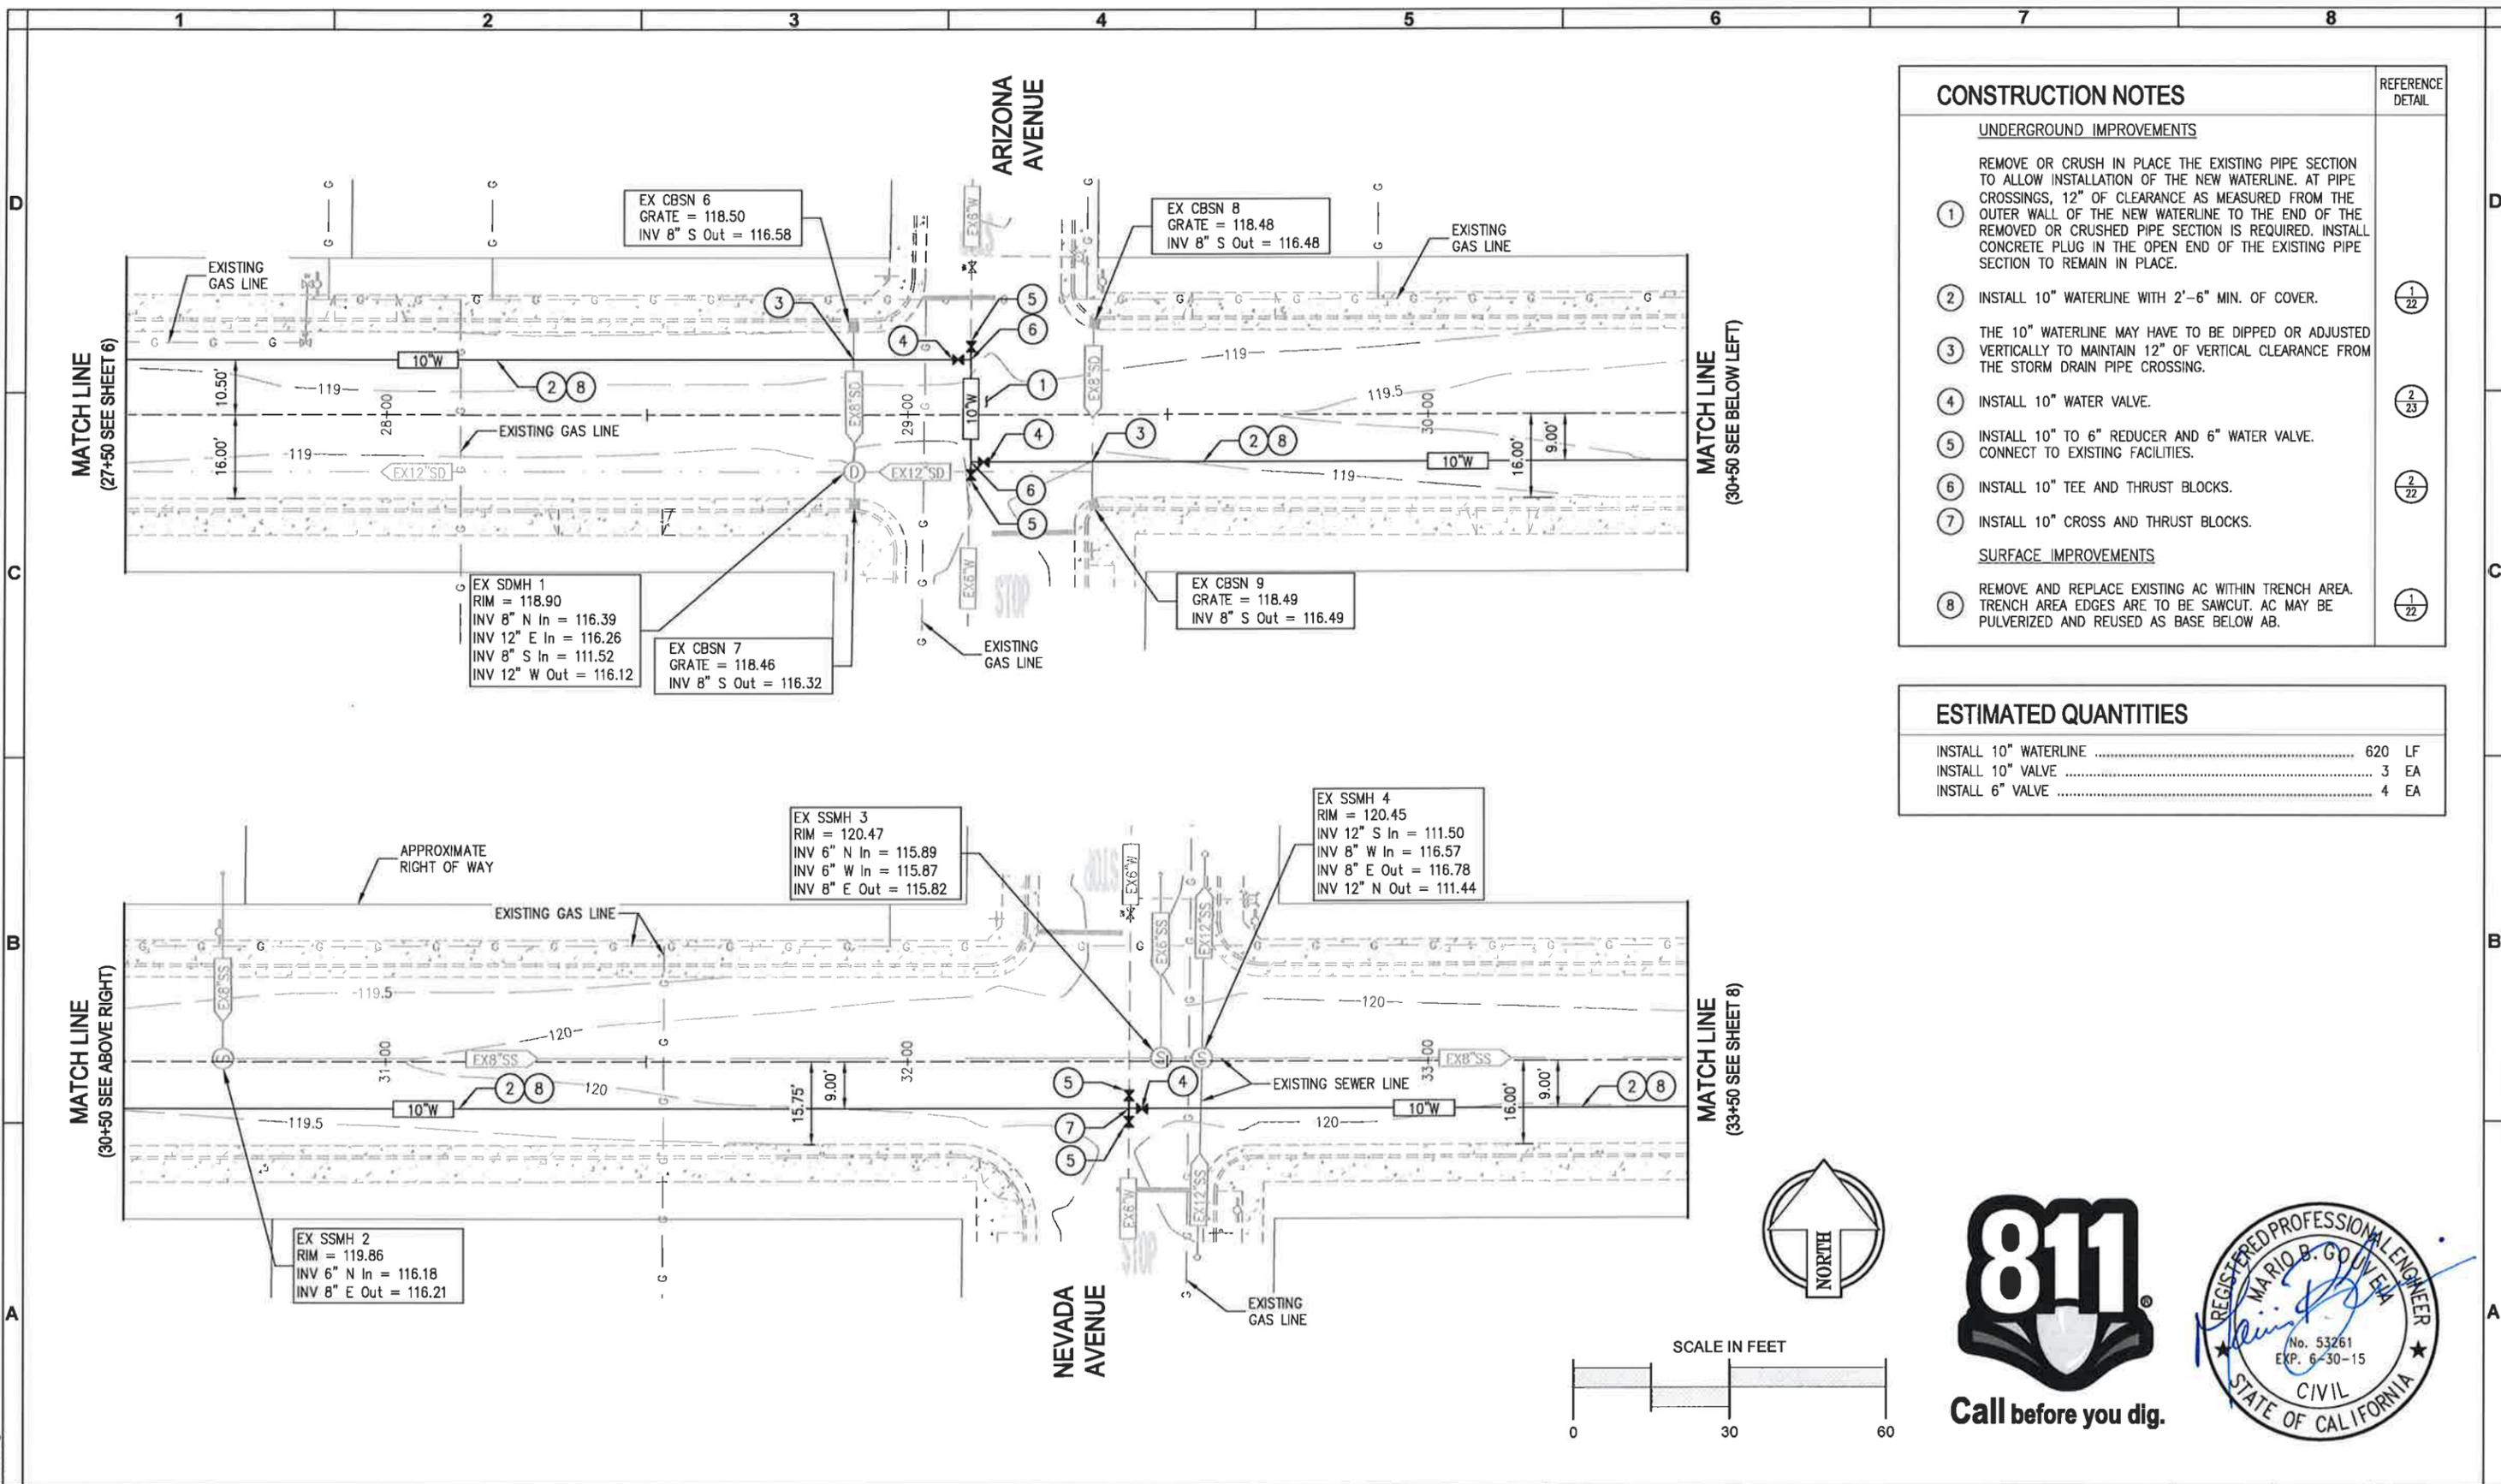

CONSTRUCTION NOTES		REFERENCE DETAIL
<u>UNDERGROUND IMPROVEMENTS</u>		
1	REMOVE OR CRUSH IN PLACE THE EXISTING PIPE SECTION TO ALLOW INSTALLATION OF THE NEW WATERLINE. AT PIPE CROSSINGS, 12" OF CLEARANCE AS MEASURED FROM THE OUTER WALL OF THE NEW WATERLINE TO THE END OF THE REMOVED OR CRUSHED PIPE SECTION IS REQUIRED. INSTALL CONCRETE PLUG IN THE OPEN END OF THE EXISTING PIPE SECTION TO REMAIN IN PLACE.	1/22
2	INSTALL 10" WATERLINE WITH 2'-6" MIN. OF COVER.	2/23
3	THE 10" WATERLINE MAY HAVE TO BE DIPPED OR ADJUSTED VERTICALLY TO MAINTAIN 12" OF VERTICAL CLEARANCE FROM THE STORM DRAIN PIPE CROSSING.	2/22
4	INSTALL 10" WATER VALVE.	2/22
5	INSTALL 10" TO 6" REDUCER AND 6" WATER VALVE. CONNECT TO EXISTING FACILITIES.	1/22
6	INSTALL 10" TEE AND THRUST BLOCKS.	
7	INSTALL 10" CROSS AND THRUST BLOCKS.	
<u>SURFACE IMPROVEMENTS</u>		
8	REMOVE AND REPLACE EXISTING AC WITHIN TRENCH AREA. TRENCH AREA EDGES ARE TO BE SAWCUT. AC MAY BE PULVERIZED AND REUSED AS BASE BELOW AB.	

ESTIMATED QUANTITIES	
INSTALL 10" WATERLINE	620 LF
INSTALL 10" VALVE	3 EA
INSTALL 6" VALVE	4 EA

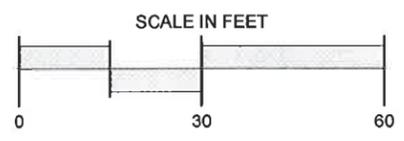

Apr 03, 2015 - 1:40pm
V:\C1516\02\2015\04\02\015.dwg



REV	DATE	DESCRIPTION	APPR

OWNERSHIP OF DOCUMENTS
THIS DOCUMENT, AND THE CONCEPTS AND DESIGNS PRESENTED HEREIN, AS AN INSTRUMENT OF SERVICE, IS THE PROPERTY OF GOUVEIA ENGINEERING, INC., AND IS INTENDED ONLY FOR THE SPECIFIC PURPOSE AND CLIENT FOR WHICH IT WAS PREPARED. REUSE, IN WHOLE OR IN PART, IS NOT PERMITTED WITHOUT WRITTEN AUTHORIZATION BY GOUVEIA ENGINEERING, INC.

GOUVEIA ENGINEERING, INC.
CONSULTING ENGINEERS
456 Sixth Street • Gustine, California 95322
Telephone (209) 854-3300 • Fax (209) 854-3600

CITY OF LOS BANOS
HENRY MILLER AREA STORM DRAIN AND L STREET WATERLINE
WEST L STREET WATERLINE
IMPROVEMENTS STA. 27+50 TO 33+50


DESIGNED BY NWF, DGR	DATE 03/27/2015	DRAWING C-107
DRAWN BY NWF, AMT, DGR	DATE 04/02/2015	SHEET 7
CHECKED BY M. GOUVEIA	DATE 04/02/2015	OF 27 SHEETS
APPROVED M. GOUVEIA	DATE 04/03/2015	PROJECT NUMBER 835.02, 840.02

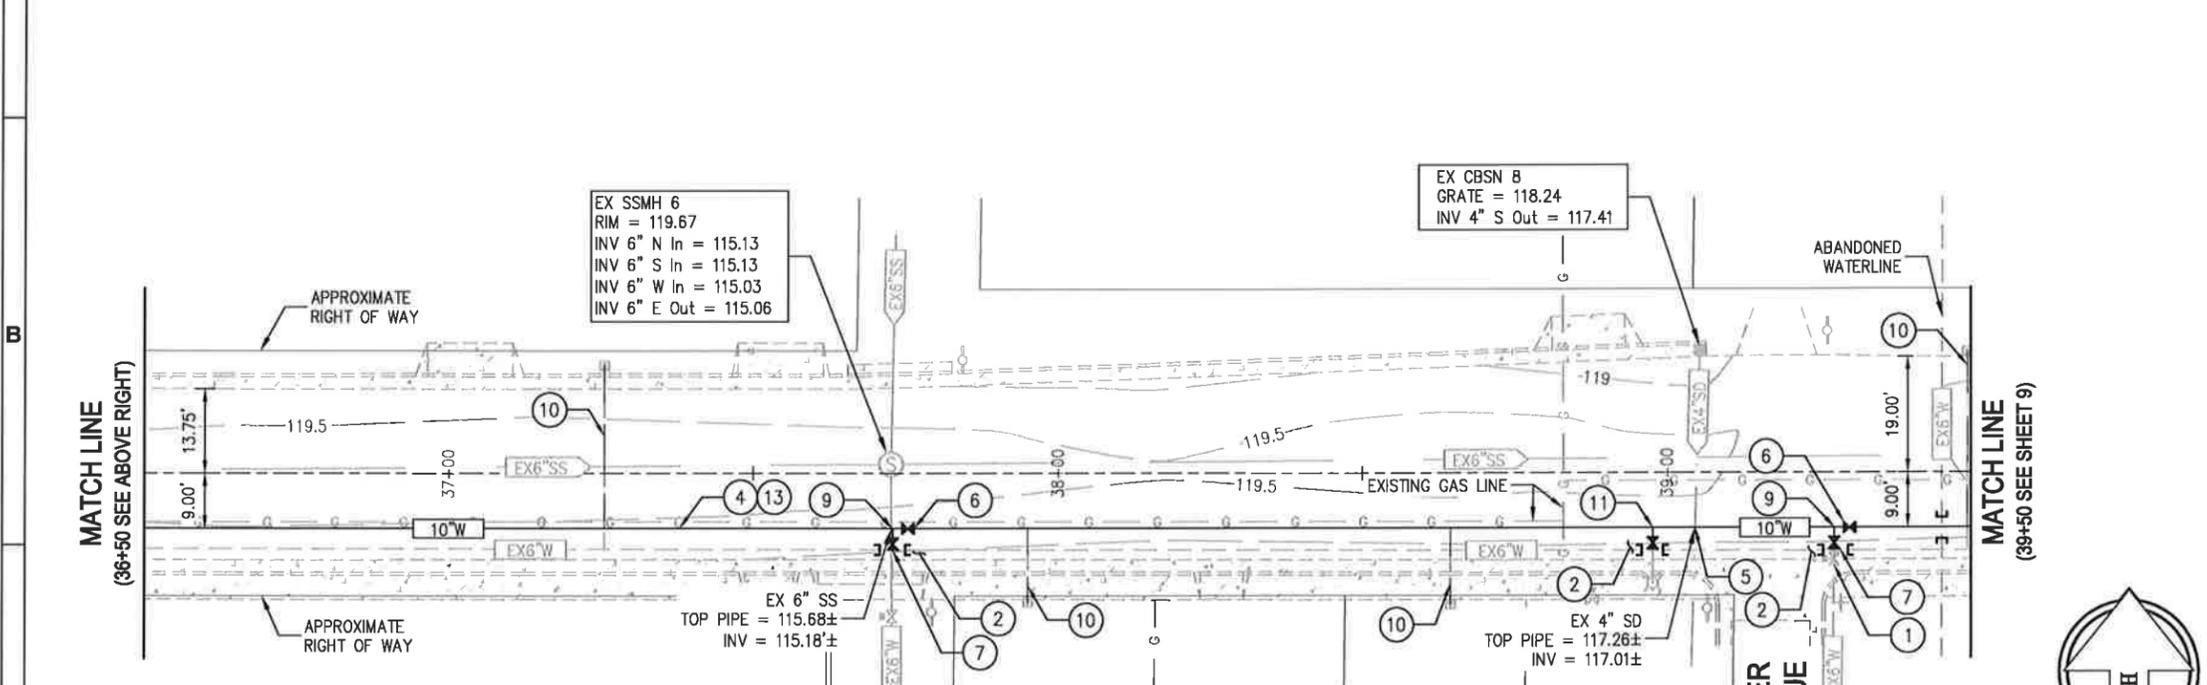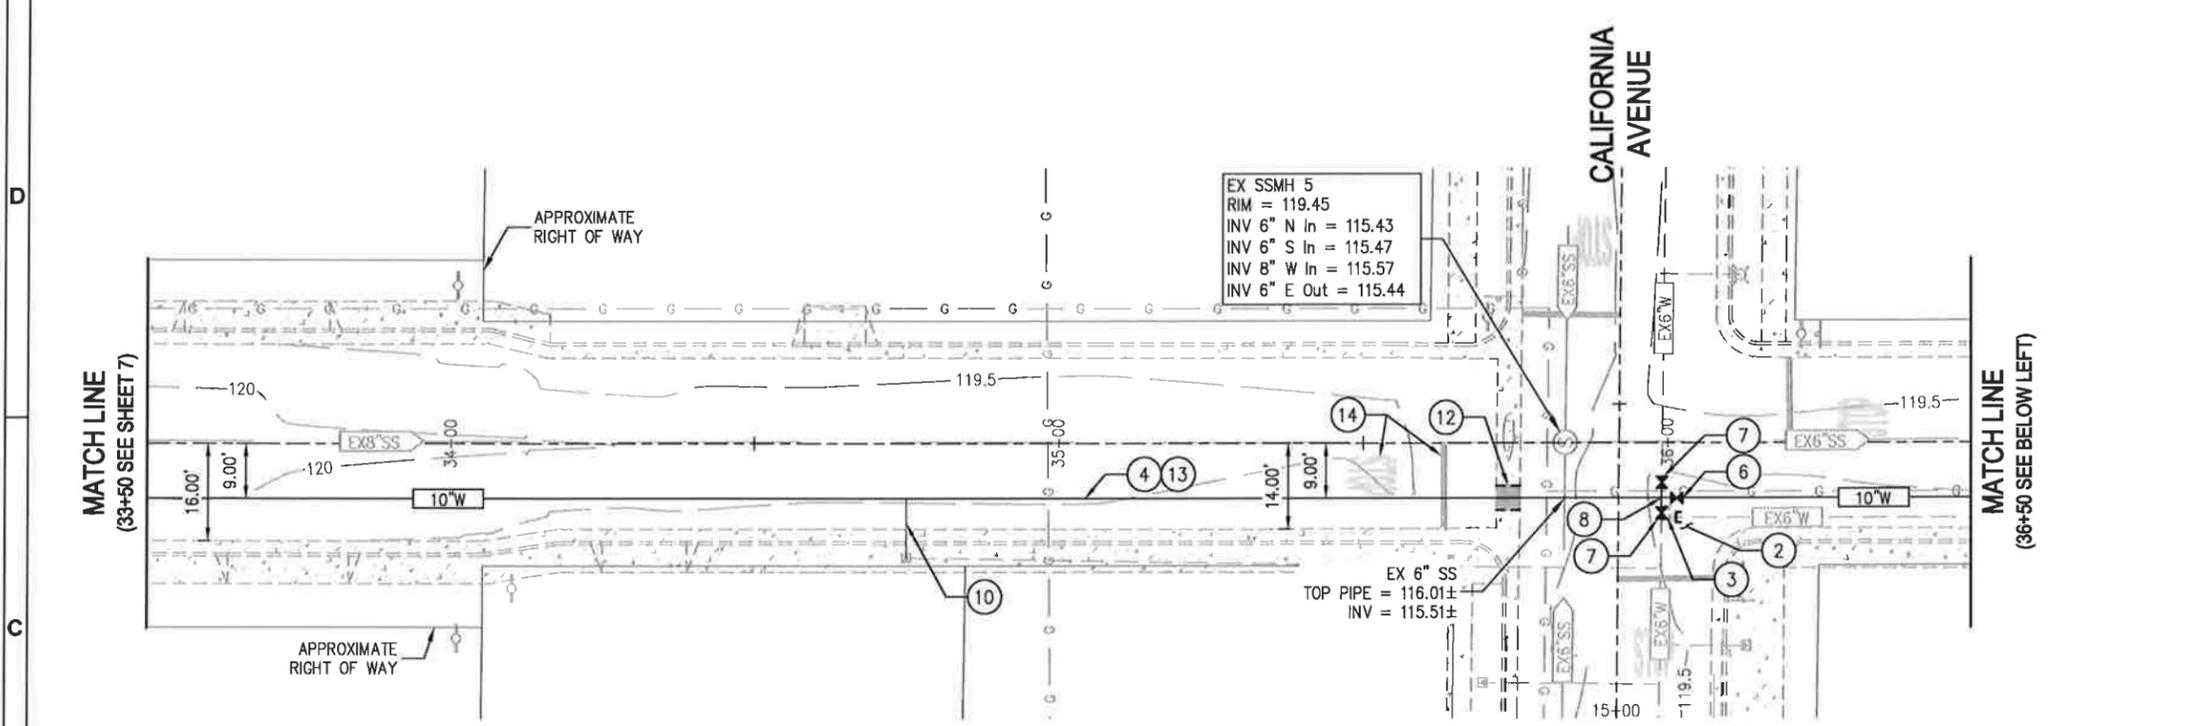

- ### CONSTRUCTION NOTES
- UNDERGROUND IMPROVEMENTS**
- EXISTING WATER VALVE TO REMAIN AND BE PROTECTED.
REMOVE OR CRUSH IN PLACE THE EXISTING PIPE SECTION TO ALLOW INSTALLATION OF THE NEW WATERLINE. AT PIPE CROSSINGS, 12" OF CLEARANCE AS MEASURED FROM THE OUTER WALL OF THE NEW WATERLINE TO THE END OF THE REMOVED OR CRUSHED PIPE SECTION IS REQUIRED. INSTALL CONCRETE PLUG IN THE OPEN END OF THE EXISTING PIPE SECTION TO REMAIN IN PLACE.
 - VALVE TO REMAIN AND BE ABANDONED IN PLACE. THE PROCESS FOR ABANDONING THE VALVE IS:
1) THE VALVE IS TO BE PLACED IN THE CLOSED POSITION.
2) THE BOX IS TO BE REMOVED.
3) THE HOLE IS TO BE BACKFILLED AND THE PAVEMENT PATCHED.
 - INSTALL 10" WATERLINE WITH 2'-6" MIN. OF COVER.
 - THE 10" WATERLINE MAY HAVE TO BE DIPPED OR ADJUSTED VERTICALLY TO MAINTAIN 12" OF VERTICAL CLEARANCE FROM THE CROSSING UTILITY LINE.
 - INSTALL 10" WATER VALVE.
 - INSTALL 10" TO 6" REDUCER AND 6" WATER VALVE. CONNECT TO EXISTING FACILITIES.
 - INSTALL 10" CROSS AND THRUST BLOCK.
 - INSTALL 10" TEE AND THRUST BLOCKS.
 - REPLACE SERVICE LINE. NEW SERVICE LINE IS TO BE DIRECTLY CONNECTED FROM EXISTING METER TO NEW WATERLINE.
 - INSTALL FITTINGS AND 6" WATER VALVE. CONNECT EXISTING FIRE HYDRANT TO NEW WATERLINE.
- SURFACE IMPROVEMENTS**
- REMOVE AND REPLACE VALLEY GUTTER AS REQUIRED FOR PIPELINE INSTALLATION.
 - REMOVE AND REPLACE EXISTING AC WITHIN TRENCH AREA. TRENCH AREA EDGES ARE TO BE SAWCUT. AC MAY BE PULVERIZED AND REUSED AS BASE BELOW AB.
 - REMOVE AND REAPPLY "STOP" MARKING AND STOP BAR.

ESTIMATED QUANTITIES

TRANSFER WATER SERVICE	5	EA
INSTALL 10" WATERLINE	600	LF
INSTALL 10" VALVE	3	EA
INSTALL 6" VALVE	4	EA
CONNECT TO EXISTING FIRE HYDRANT	1	EA
REMOVE AND REPLACE VALLEY GUTTER	16	SF
THERMOPLASTIC MARKINGS	36	SF

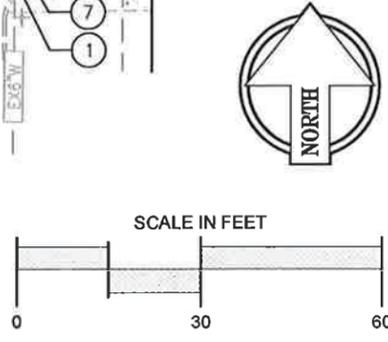

REV	DATE	DESCRIPTION	APPR



OWNERSHIP OF DOCUMENTS
THIS DOCUMENT, AND THE CONCEPTS AND DESIGNS PRESENTED HEREIN, AS AN INSTRUMENT OF SERVICE, IS THE PROPERTY OF GOUVEIA ENGINEERING, INC., AND IS INTENDED ONLY FOR THE SPECIFIC PURPOSE AND CLIENT FOR WHICH IT WAS PREPARED. REUSE, IN WHOLE OR IN PART, IS NOT PERMITTED WITHOUT WRITTEN AUTHORIZATION BY GOUVEIA ENGINEERING, INC.

GOUVEIA ENGINEERING, INC.
CONSULTING ENGINEERS
456 Sixth Street • Gustine, California 95322
Telephone (209) 854-3300 • Fax (209) 854-3600

CITY OF LOS BANOS
HENRY MILLER AREA STORM DRAIN AND L STREET WATERLINE
WEST L STREET WATERLINE
IMPROVEMENTS STA. 33+50 TO 39+50



DESIGNED BY NWF, DGR	DATE 03/27/2015	DRAWING C-108
DRAWN BY NWF, AMT, DGR	DATE 04/02/2015	SHEET 8
CHECKED BY M. GOUVEIA	DATE 04/02/2015	OF 27 SHEETS
APPROVED M. GOUVEIA	DATE 04/03/2015	PROJECT NUMBER 835.02, 840.02

Apr 03, 2015 - 1:46pm
Y:\CL\Projects\2015\150402C-108.dwg

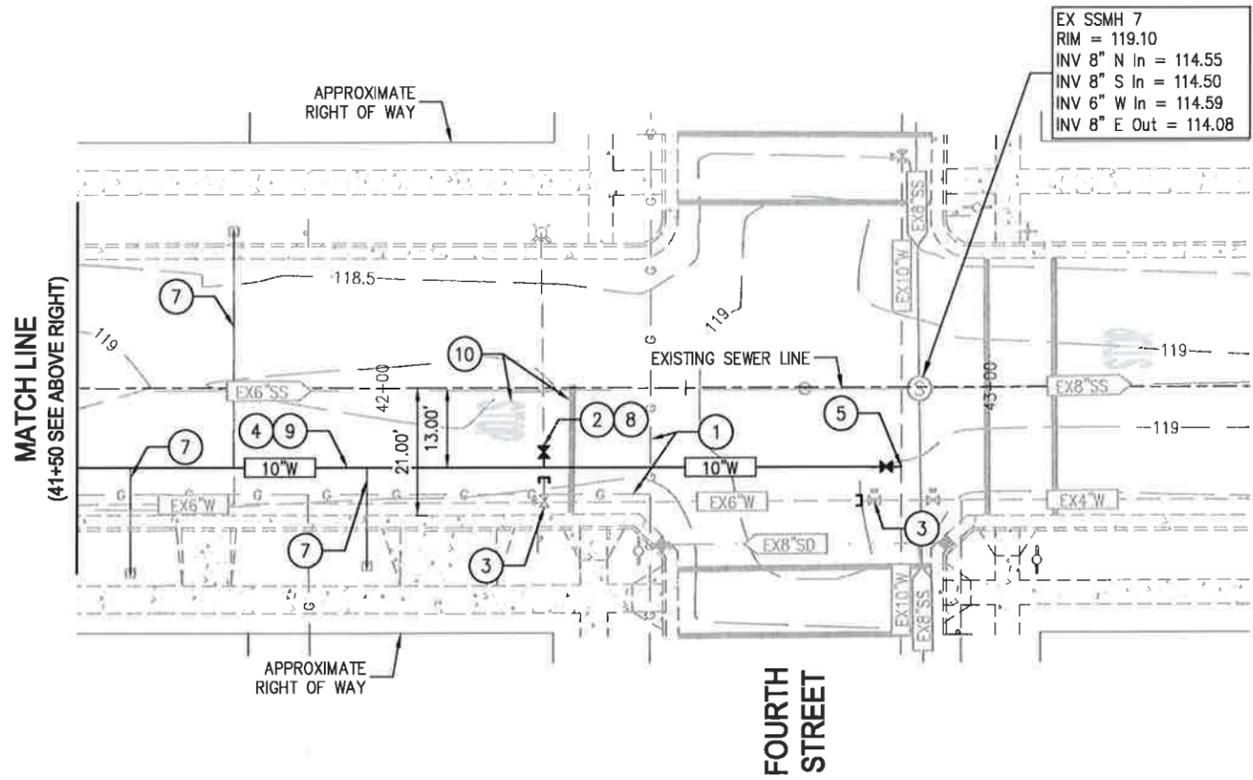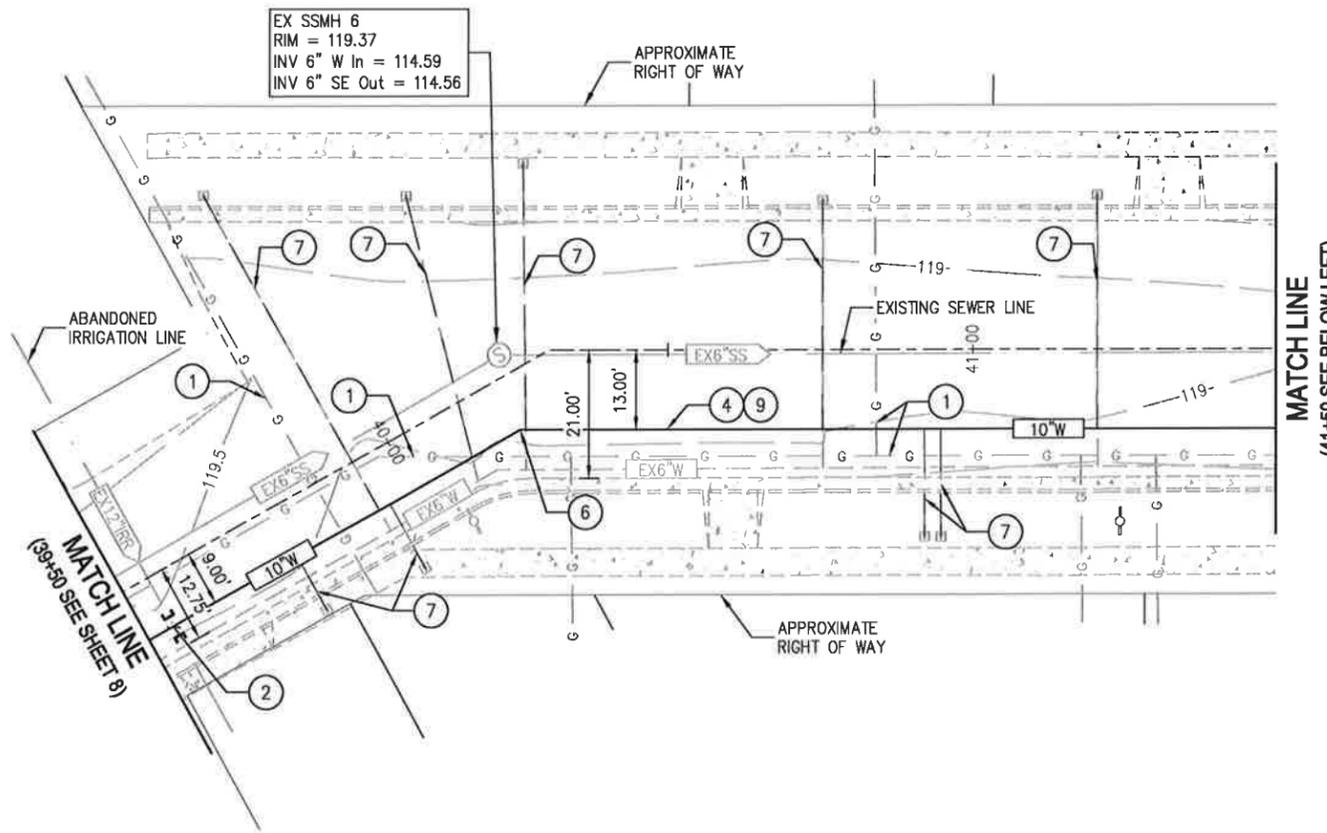

CONSTRUCTION NOTES		REFERENCE DETAIL
UNDERGROUND IMPROVEMENTS		
1	LOCATE AND PROTECT EXISTING GAS LINE. REMOVE OR CRUSH IN PLACE THE EXISTING PIPE SECTION TO ALLOW INSTALLATION OF THE NEW WATERLINE. AT PIPE CROSSINGS, 12" OF CLEARANCE AS MEASURED FROM THE OUTER WALL OF THE NEW WATERLINE TO THE END OF THE REMOVED OR CRUSHED PIPE SECTION IS REQUIRED. INSTALL CONCRETE PLUG IN THE OPEN END OF THE EXISTING PIPE SECTION TO REMAIN IN PLACE.	
2	VALVE TO REMAIN AND BE ABANDONED IN PLACE. THE PROCESS FOR ABANDONING THE VALVE IS: 1) THE VALVE IS TO BE PLACED IN THE CLOSED POSITION, 2) THE BOX IS TO BE REMOVED, 3) THE HOLE IS TO BE BACKFILLED AND THE PAVEMENT PATCHED.	
3	INSTALL 10" WATERLINE WITH 2'-6" MIN. OF COVER.	1/22
4	HOT TAP AND CONNECT TO EXISTING FACILITIES.	2/22
5	INSTALL ELBOW AND THRUST BLOCK.	3/23
6	REPLACE SERVICE LINE. NEW SERVICE LINE IS TO BE DIRECTLY CONNECTED FROM EXISTING METER TO NEW WATERLINE.	1/23
7	INSTALL FITTINGS AND 6" WATER VALVE. CONNECT EXISTING FIRE HYDRANT TO NEW WATERLINE.	1/22
SURFACE IMPROVEMENTS		
8	REMOVE AND REPLACE EXISTING AC WITHIN TRENCH AREA. TRENCH AREA EDGES ARE TO BE SAWCUT. AC MAY BE PULVERIZED AND REUSED AS BASE BELOW AB.	1/22
9	REMOVE AND REAPPLY "STOP" MARKING AND STOP BAR.	

ESTIMATED QUANTITIES	
HOT TAP TO EXISTING WATERLINE	1 EA
TRANSFER WATER SERVICE	12 EA
INSTALL 10" WATERLINE	330 LF
CONNECT TO EXISTING FIRE HYDRANT	1 EA
THERMOPLASTIC MARKINGS	48 SF

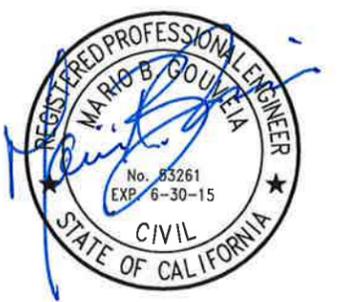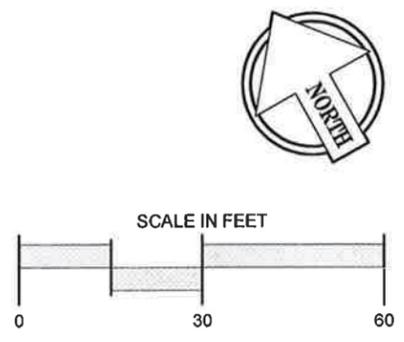

Apr 03, 2015 - 1:14pm
V:\C:\Users\mario.gouveia\Documents\84022-C-103.dwg




REV	DATE	DESCRIPTION	APPR
1			
2			
3			
4			
5			
6			
7			
8			

OWNERSHIP OF DOCUMENTS
THIS DOCUMENT, AND THE CONCEPTS AND DESIGNS PRESENTED HEREIN, AS AN INSTRUMENT OF SERVICE, IS THE PROPERTY OF GOUVEIA ENGINEERING, INC., AND IS INTENDED ONLY FOR THE SPECIFIC PURPOSE AND CLIENT FOR WHICH IT WAS PREPARED. REUSE, IN WHOLE OR IN PART, IS NOT PERMITTED WITHOUT WRITTEN AUTHORIZATION BY GOUVEIA ENGINEERING, INC.

GOUVEIA ENGINEERING, INC.
CONSULTING ENGINEERS
456 Sixth Street • Gustine, California 95322
Telephone (209) 854-3300 • Fax (209) 854-3600

CITY OF LOS BANOS
HENRY MILLER AREA STORM DRAIN AND L STREET WATERLINE
WEST L STREET WATERLINE
IMPROVEMENTS STA. 39+50 TO 43+50

DESIGNED BY NWF, DGR	DATE 03/27/2015	DRAWING C-109
DRAWN BY NWF, AMT, DGR	DATE 04/02/2015	SHEET 9
CHECKED BY M. GOUVEIA	DATE 04/02/2015	OF 27 SHEETS
APPROVED M. GOUVEIA	DATE 04/03/2015	PROJECT NUMBER 835.02, 840.02

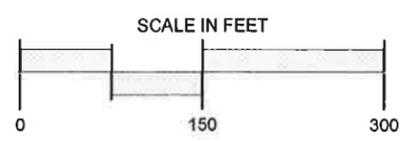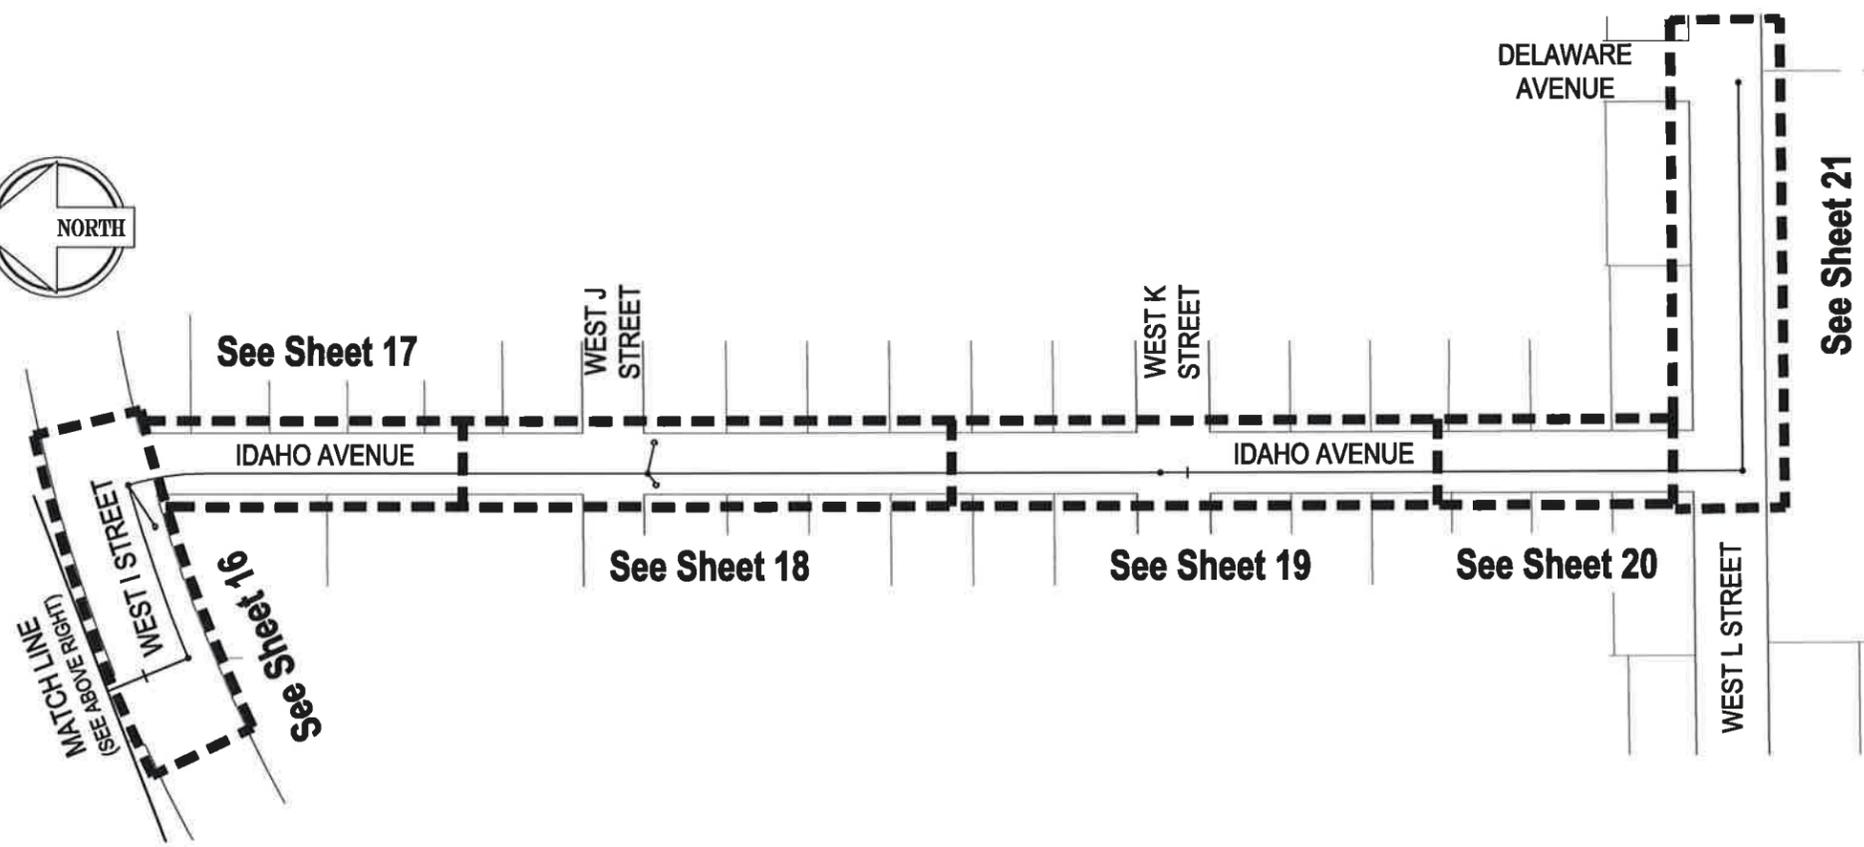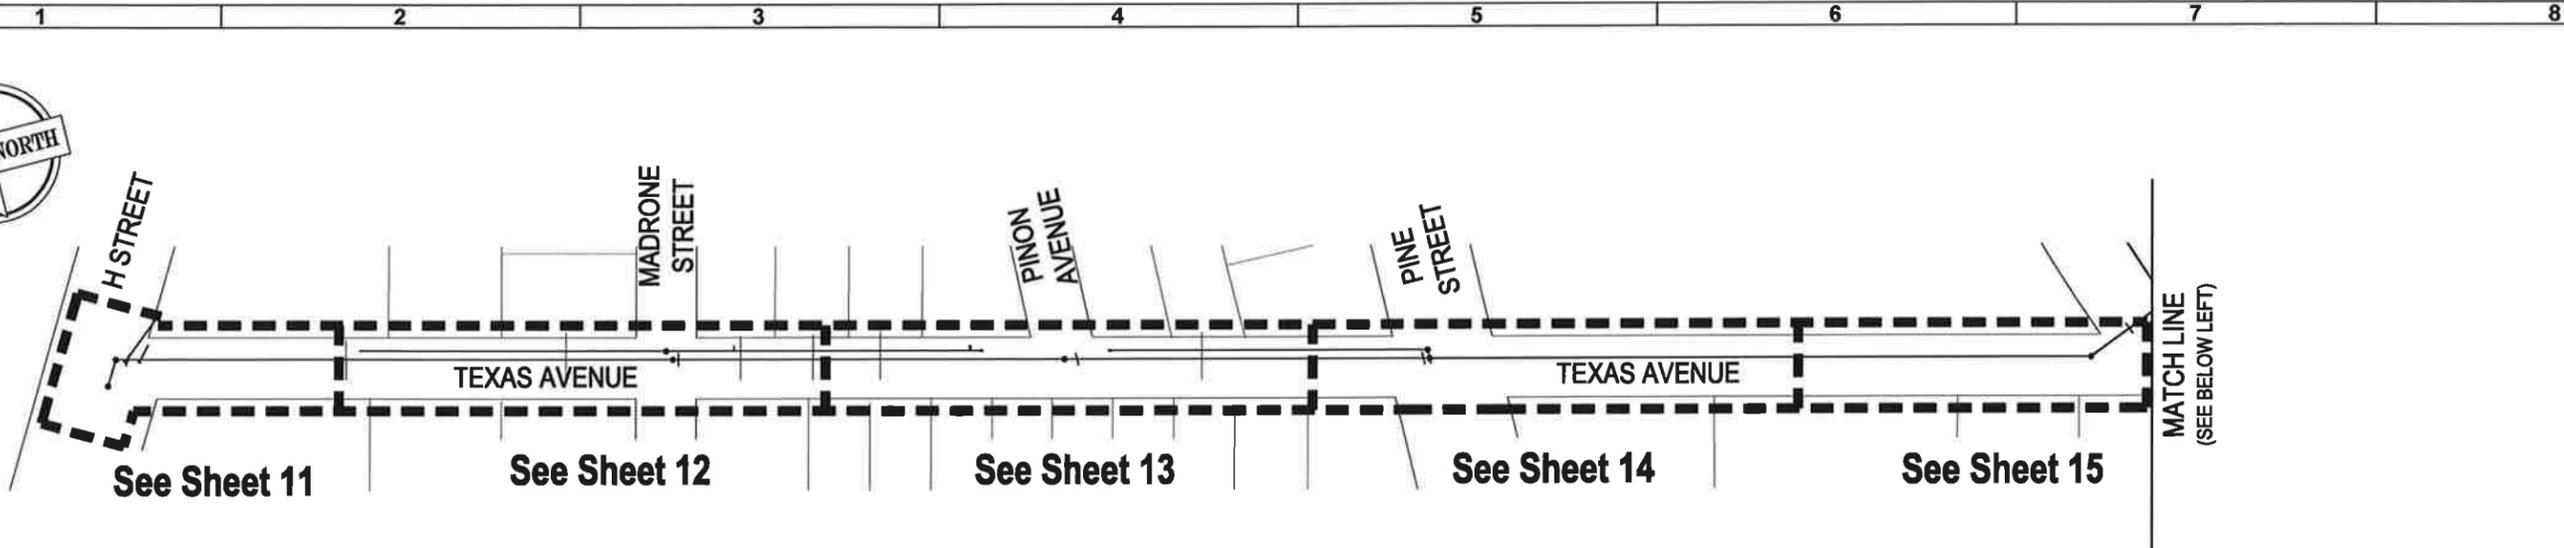

Apr 03, 2015 - 1:43pm
V:\C1\B1040702\caw\gouveia\840020-103.dwg





REV	DATE	DESCRIPTION	APPR
1			
2			

OWNERSHIP OF DOCUMENTS
THIS DOCUMENT, AND THE CONCEPTS AND DESIGNS PRESENTED HEREIN, AS AN INSTRUMENT OF SERVICE, IS THE PROPERTY OF GOUVEIA ENGINEERING, INC., AND IS INTENDED ONLY FOR THE SPECIFIC PURPOSE AND CLIENT FOR WHICH IT WAS PREPARED. REUSE, IN WHOLE OR IN PART, IS NOT PERMITTED WITHOUT WRITTEN AUTHORIZATION BY GOUVEIA ENGINEERING, INC.

 **GOUVEIA ENGINEERING, INC.**
CONSULTING ENGINEERS
456 Sixth Street • Gustine, California 95322
Telephone (209) 854-3300 • Fax (209) 854-3600

CITY OF LOS BANOS
HENRY MILLER AREA STORM DRAIN AND L STREET WATERLINE
HENRY MILLER AREA STORM DRAIN
KEY SHEET

DESIGNED BY NWF, DGR	DATE 03/27/2015	DRAWING C-110
DRAWN BY NWF, AMT, DGR	DATE 04/02/2015	SHEET 10
CHECKED BY M. GOUVEIA	DATE 04/02/2015	OF 27 SHEETS
APPROVED M. GOUVEIA	DATE 04/03/2015	PROJECT NUMBER 835.02, 840.02

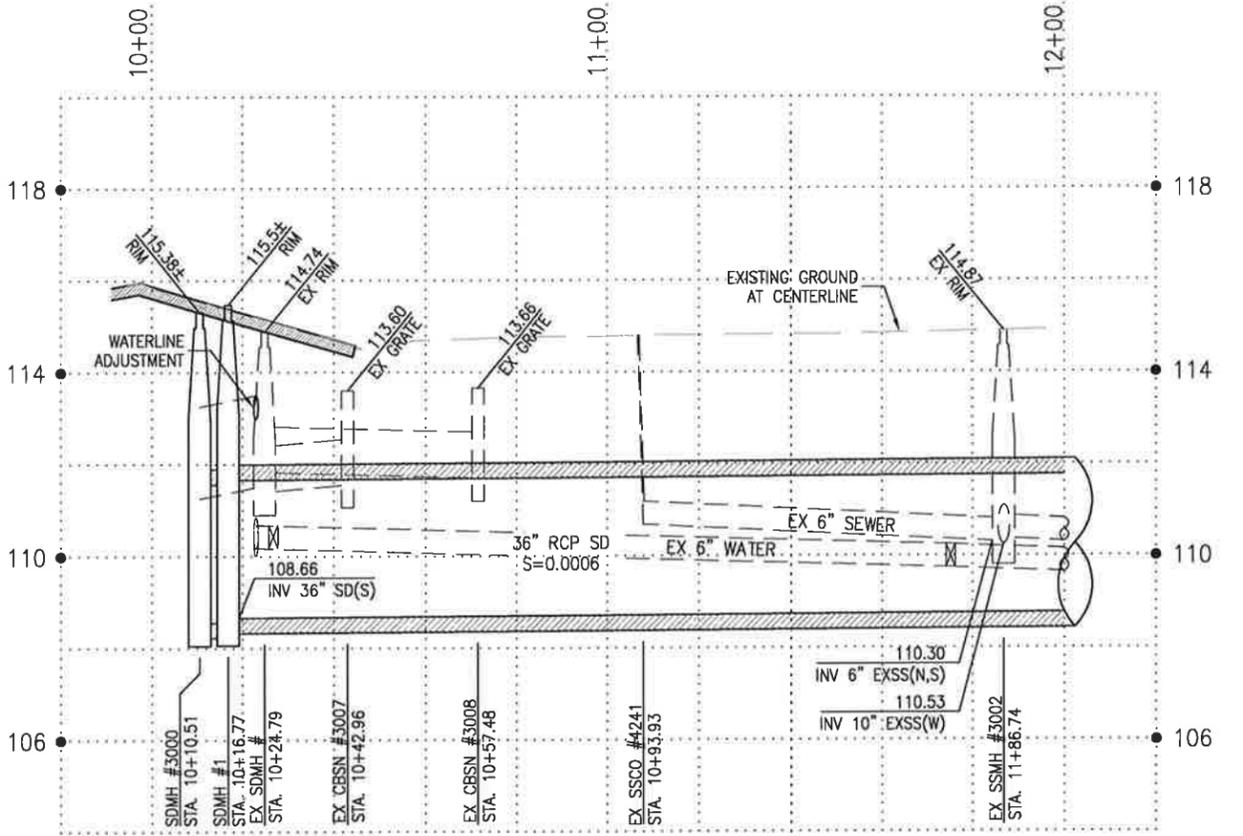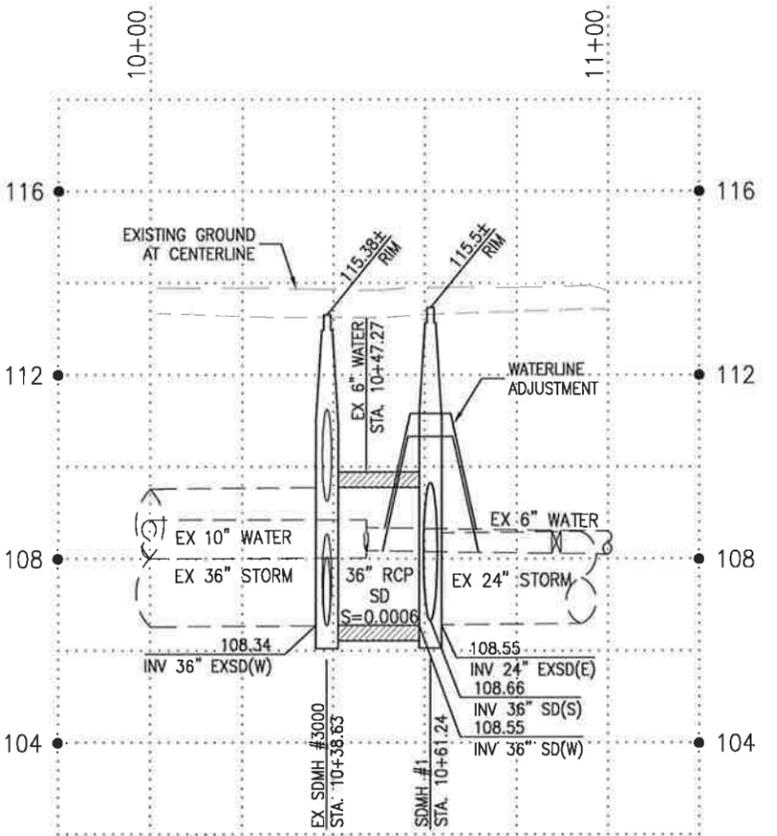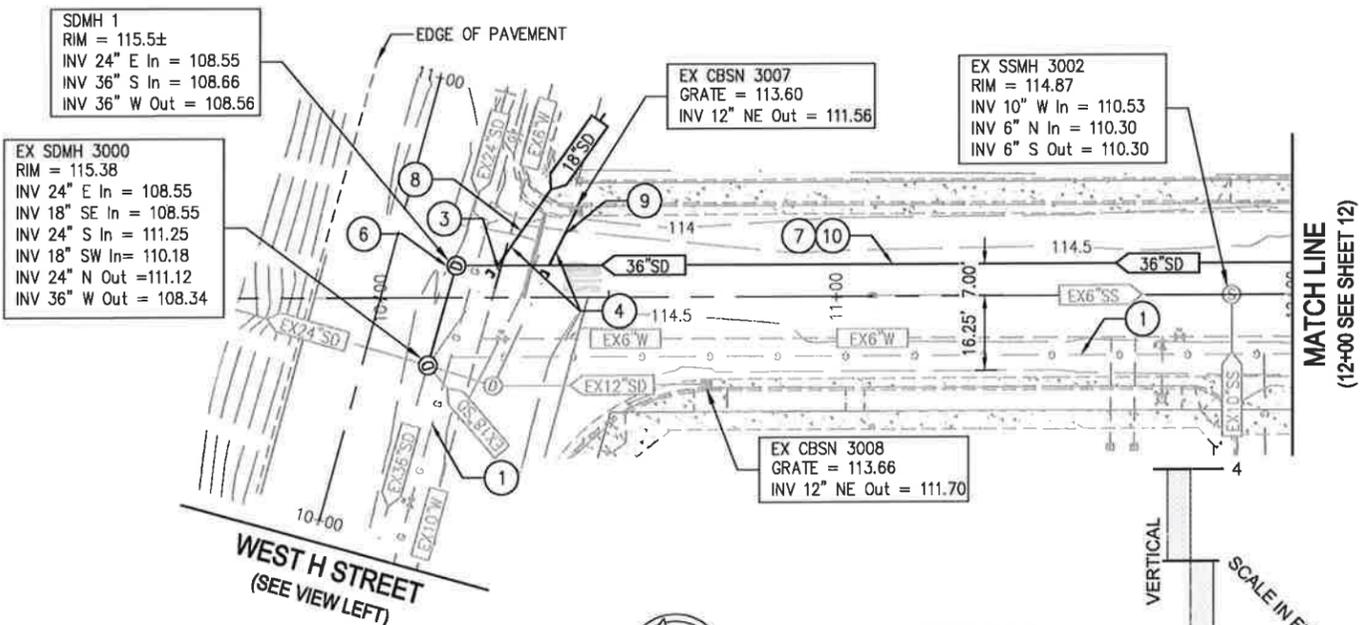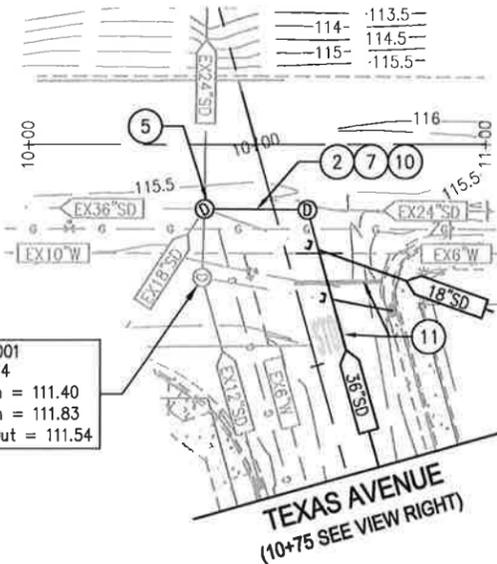

- ### CONSTRUCTION NOTES
- UNDERGROUND IMPROVEMENTS**
- LOCATE AND PROTECT EXISTING GAS LINE IN PLACE.
 - REMOVE EXISTING STORM DRAIN PIPE SECTION AND CONNECT TO PROPOSED MANHOLE.
 - EXISTING WATERLINE IS TO BE ADJUSTED VERTICALLY TO MAINTAIN 12" CLEARANCE FROM THE PROPOSED STORM DRAIN LINE. IF 24" MINIMUM COVER OVER WATERLINE CAN NOT BE MAINTAINED, THE WATERLINE SHALL BE SLURRY BACKFILLED.
 - REMOVE THE EXISTING PIPE SECTION AS REQUIRED TO INSTALL THE PROPOSED 36" RCP STORM DRAIN PIPE. 12" OF CLEARANCE AS MEASURED FROM THE OUTER WALL OF THE 36" STORM DRAIN PIPE TO THE END OF THE REMOVED PIPE SECTION IS REQUIRED. INSTALL CONCRETE PLUG IN THE DOWNSTREAM END OF THE EXISTING PIPE TO BE ABANDONED IN PLACE. TIE-IN THE UPSTREAM PIPE SECTION TO THE PROPOSED 36" STORM DRAIN PIPE.
 - REMOVE AND REPLACE EXISTING STORM DRAIN MANHOLE.
 - CONSTRUCT STORM DRAIN MANHOLE FOR 36" PIPE.
 - INSTALL 36" RCP STORM DRAIN PIPE.
 - INSTALL 18" RCP STORM DRAIN PIPE AS REQUIRED TO CONNECT TO 36" STORM DRAIN PIPE.
 - INSTALL 12" RCP STORM DRAIN PIPE AS REQUIRED TO CONNECT TO 36" STORM DRAIN PIPE.
- SURFACE IMPROVEMENTS**
- REMOVE AND REPLACE EXISTING AC WITHIN TRENCH AREA. TRENCH AREA EDGES ARE TO BE SAWCUT. AC MAY BE PULVERIZED AND REUSED AS BASE BELOW AB.
 - REMOVE AND REAPPLY "STOP" MARKING AND STOP BAR.

ESTIMATED QUANTITIES

INSTALL 36" RCP STORM DRAIN PIPE	204	LF
INSTALL 18" RCP STORM DRAIN PIPE	15	LF
INSTALL 12" RCP STORM DRAIN PIPE	15	LF
CONSTRUCT MANHOLE	2	EA
THERMOPLASTIC MARKINGS	42	SF



Apr 03, 2015 - 3:06pm
V:\C\B\40101\csc\plan\84002c-111.dwg


REV	DATE	DESCRIPTION	APPR

OWNERSHIP OF DOCUMENTS
THIS DOCUMENT, AND THE CONCEPTS AND DESIGNS PRESENTED HEREIN, AS AN INSTRUMENT OF SERVICE, IS THE PROPERTY OF GOUVEIA ENGINEERING, INC., AND IS INTENDED ONLY FOR THE SPECIFIC PURPOSE AND CLIENT FOR WHICH IT WAS PREPARED. REUSE, IN WHOLE OR IN PART, IS NOT PERMITTED WITHOUT WRITTEN AUTHORIZATION BY GOUVEIA ENGINEERING, INC.


GOUVEIA ENGINEERING, INC.
CONSULTING ENGINEERS
456 Sixth Street • Gustine, California 95322
Telephone (209) 854-3300 • Fax (209) 854-3600

CITY OF LOS BANOS
HENRY MILLER AREA STORM DRAIN AND L STREET WATERLINE
WEST H STREET STA. 10+00 TO 11+00 AND
TEXAS AVENUE STA. 10+00 TO 12+00

DESIGNED BY NWF, DGR	DATE 03/27/2015	DRAWING C-111
DRAWN BY NWF, AMT, DGR	DATE 04/02/2015	SHEET 11
CHECKED BY M. GOUVEIA	DATE 04/02/2015	OF 27 SHEETS
APPROVED M. GOUVEIA	DATE 04/03/2015	PROJECT NUMBER 835.02, 840.02


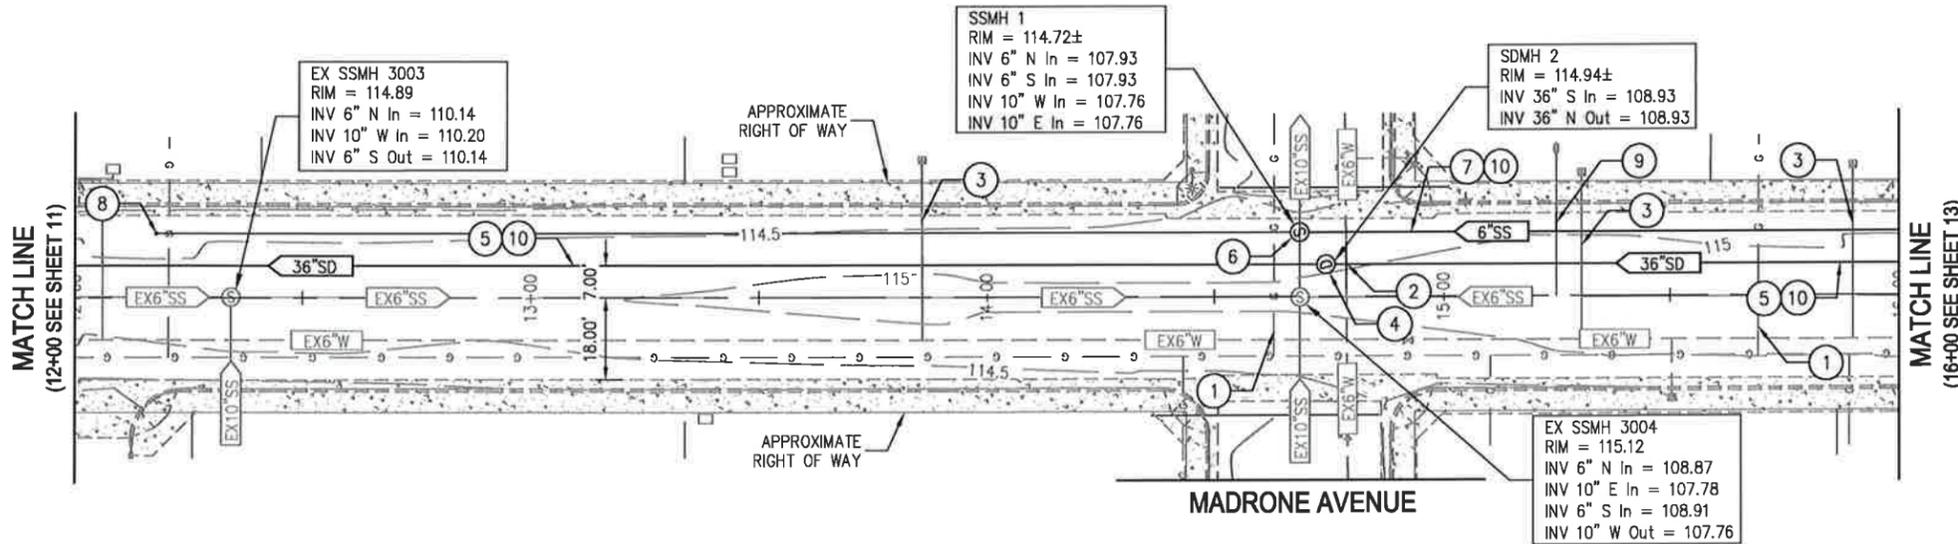


TEXAS AVENUE
STATION 12+00 - 16+00

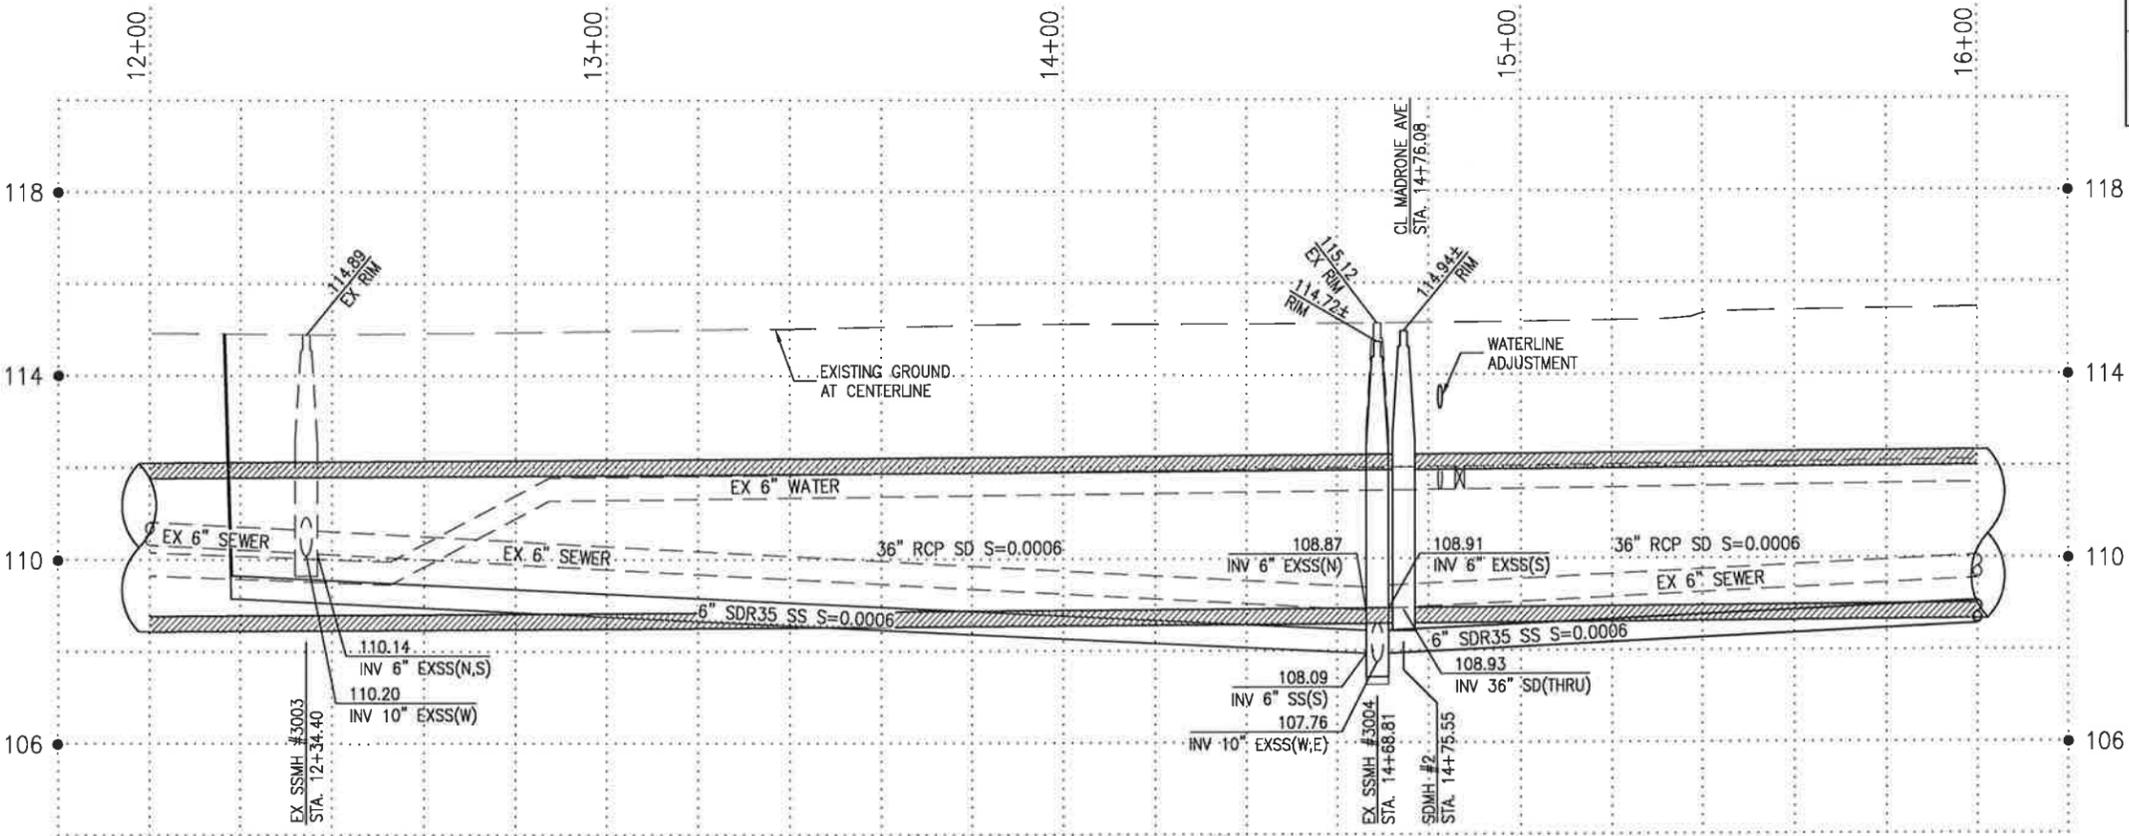

CONSTRUCTION NOTES		REFERENCE DETAIL
UNDERGROUND IMPROVEMENTS		
1	LOCATE AND PROTECT EXISTING GAS LINE IN PLACE.	
2	EXISTING WATERLINE IS TO BE ADJUSTED VERTICALLY TO MAINTAIN 12" CLEARANCE FROM THE PROPOSED STORM DRAIN LINE. IF 24" MINIMUM COVER OVER WATERLINE CAN NOT BE MAINTAINED, THE WATERLINE SHALL BE SLURRY BACKFILLED.	
3	EXISTING RESIDENTIAL WATER SERVICE MAY BE REQUIRED TO BE REPLACED IF UNABLE TO BE REROUTED ABOVE THE PROPOSED STORM DRAIN LINE.	
4	CONSTRUCT STORM DRAIN MANHOLE FOR 36" PIPE.	1/24
5	INSTALL 36" RCP STORM DRAIN PIPE.	1/22
6	CONSTRUCT SEWER MANHOLE.	3/24
7	INSTALL 6" SDR-35 SEWER PIPE.	1/22
8	INSTALL SEWER CLEANOUT.	1/25
9	TRANSFER EXISTING RESIDENTIAL SEWER SERVICE TO NEW SEWER LINE.	2/25
SURFACE IMPROVEMENTS		
10	REMOVE AND REPLACE EXISTING AC WITHIN TRENCH AREA. TRENCH AREA EDGES ARE TO BE SAWCUT. AC MAY BE PULVERIZED AND REUSED AS BASE BELOW AB.	1/22

ESTIMATED QUANTITIES	
INSTALL 36" STORM DRAIN PIPE	400 LF
CONSTRUCT MANHOLE	2 EA
INSTALL 6" SDR-35 SEWER	383 LF

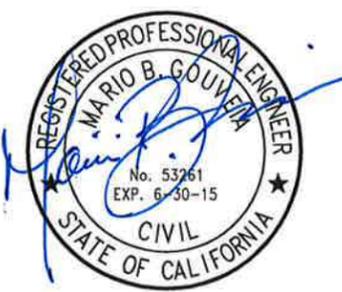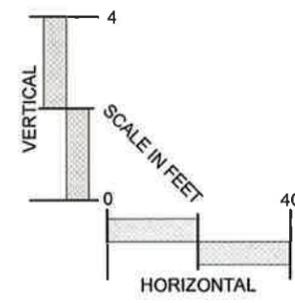

Apr 03, 2015 - 3:16pm
V:\C\15040727\cadd\plan\84002-111.dwg


REV	DATE	DESCRIPTION	APPR
1			
2			
3			
4			
5			
6			
7			
8			

OWNERSHIP OF DOCUMENTS
THIS DOCUMENT, AND THE CONCEPTS AND DESIGNS PRESENTED HEREIN, AS AN INSTRUMENT OF SERVICE, IS THE PROPERTY OF GOUVEIA ENGINEERING, INC., AND IS INTENDED ONLY FOR THE SPECIFIC PURPOSE AND CLIENT FOR WHICH IT WAS PREPARED. REUSE, IN WHOLE OR IN PART, IS NOT PERMITTED WITHOUT WRITTEN AUTHORIZATION BY GOUVEIA ENGINEERING, INC.


GOUVEIA ENGINEERING, INC.
CONSULTING ENGINEERS
456 Sixth Street • Gustine, California 95322
Telephone (209) 854-3300 • Fax (209) 854-3600

CITY OF LOS BANOS
HENRY MILLER AREA STORM DRAIN AND L STREET WATERLINE
TEXAS AVENUE
IMPROVEMENTS STA. 12+00 TO 16+00

DESIGNED BY NWF, DGR	DATE 03/27/2015	DRAWING C-112
DRAWN BY NWF, AMT, DGR	DATE 04/02/2015	SHEET
CHECKED BY M. GOUVEIA	DATE 04/02/2015	12
APPROVED M. GOUVEIA	DATE 04/03/2015	OF 27 SHEETS PROJECT NUMBER 835.02, 840.02


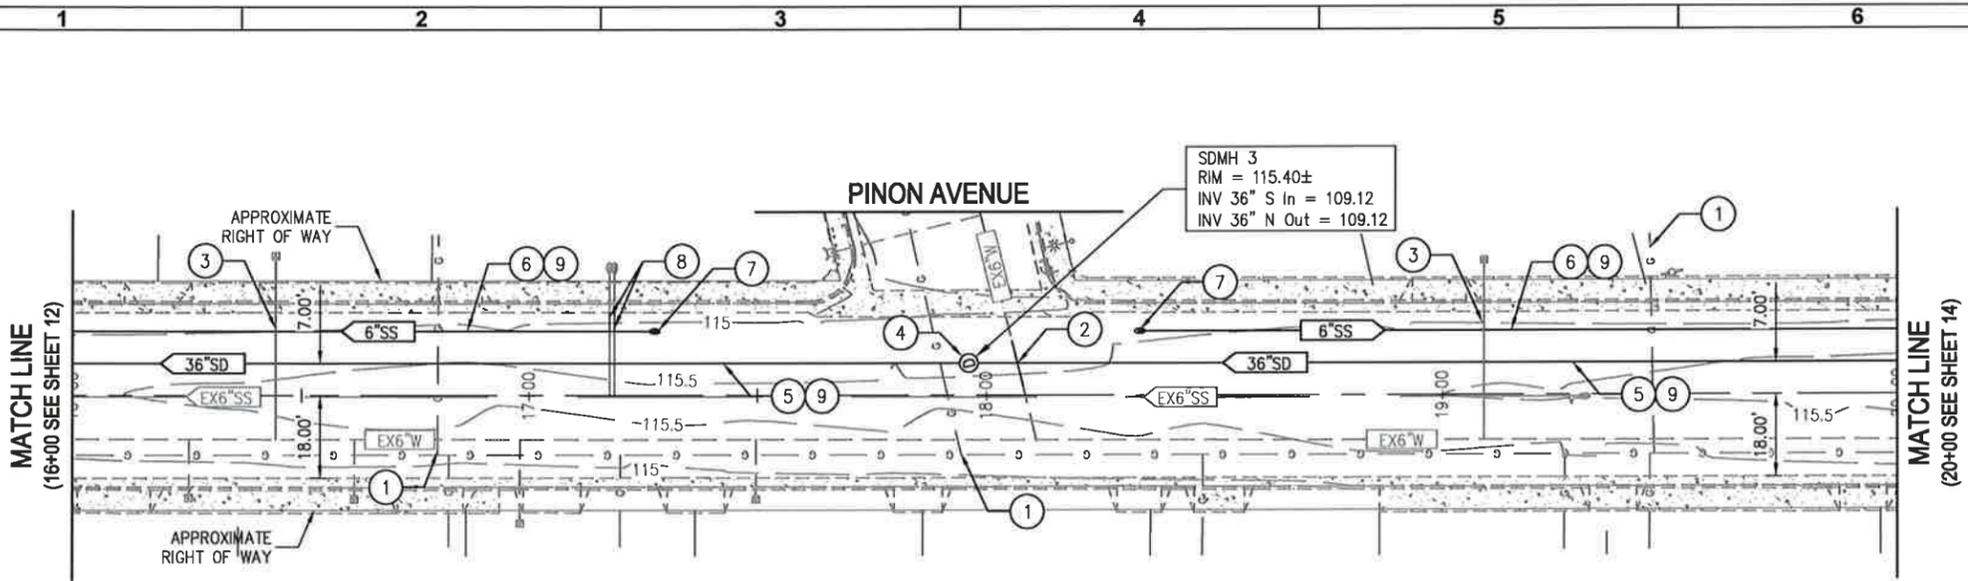


TEXAS AVENUE
STATION 16+00 - 20+00

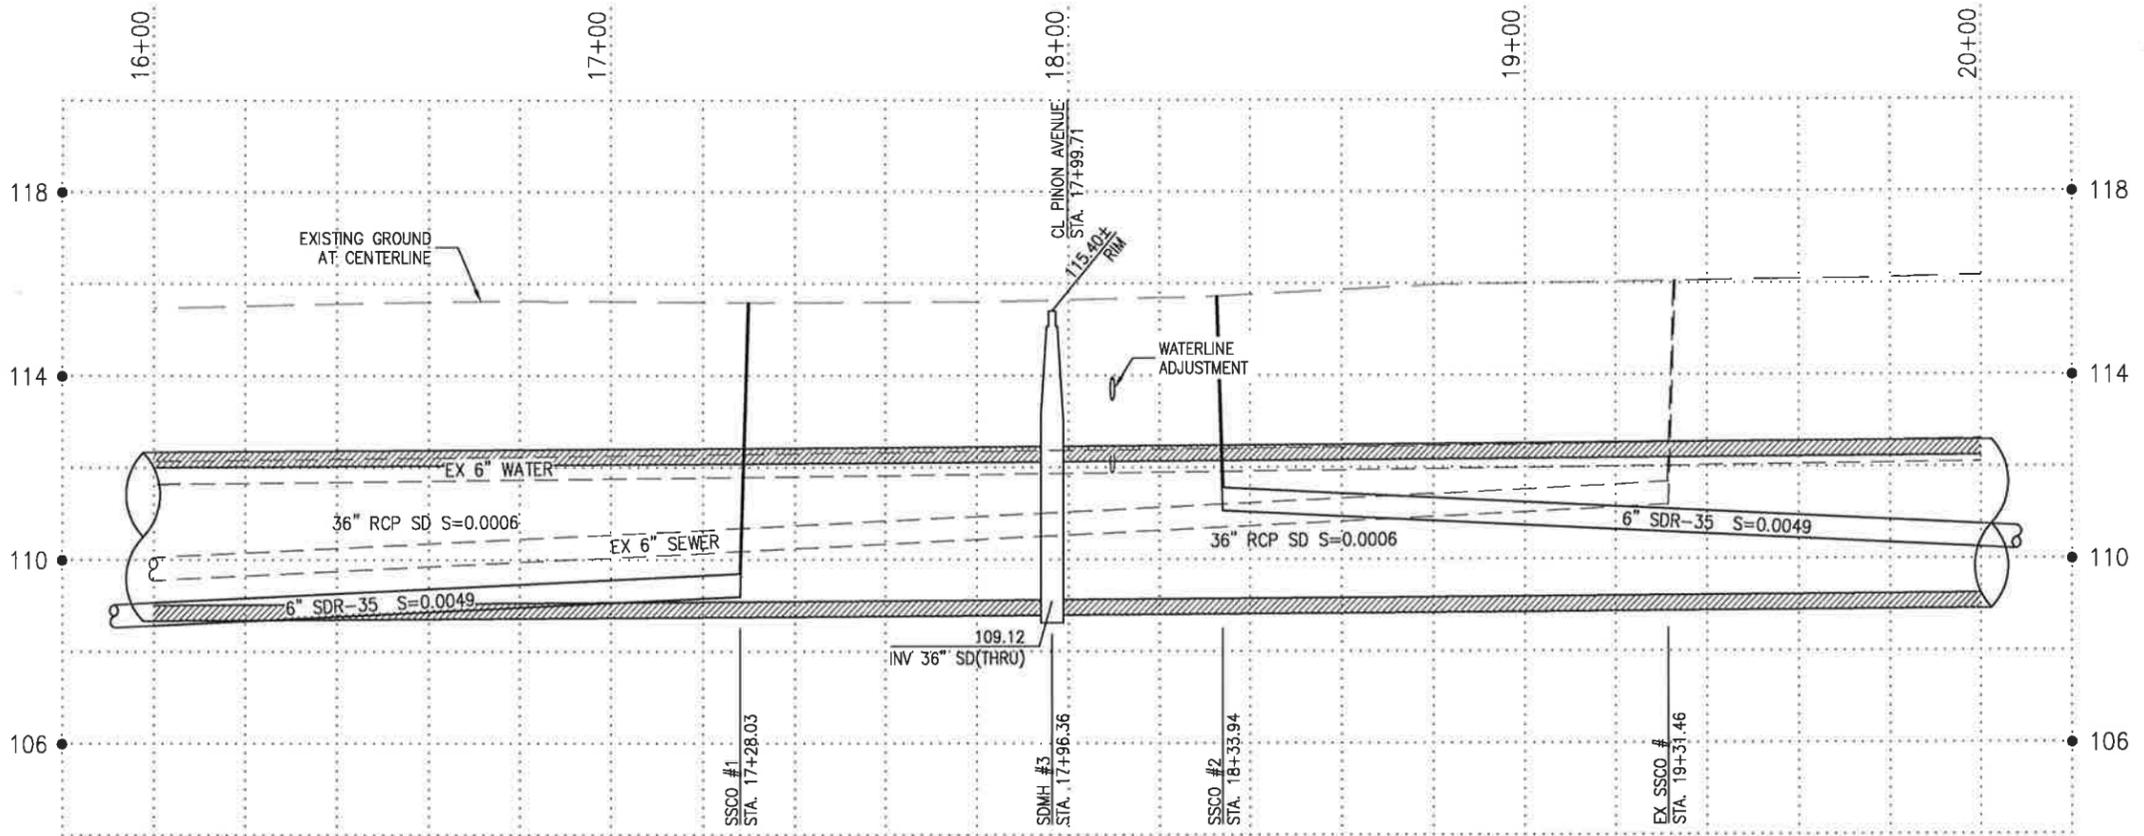

- | CONSTRUCTION NOTES | | REFERENCE
DETAIL |
|---------------------------------|--|---------------------|
| UNDERGROUND IMPROVEMENTS | | |
| 1 | LOCATE AND PROTECT EXISTING GAS LINE IN PLACE. | |
| 2 | EXISTING WATERLINE IS TO BE ADJUSTED VERTICALLY TO MAINTAIN 12" CLEARANCE FROM THE PROPOSED STORM DRAIN LINE. IF 24" MINIMUM COVER OVER WATERLINE CAN NOT BE MAINTAINED, THE WATERLINE SHALL BE SLURRY BACKFILLED. | |
| 3 | EXISTING RESIDENTIAL WATER SERVICE MAY BE REQUIRED TO BE REPLACED IF UNABLE TO BE REROUTED ABOVE THE PROPOSED STORM DRAIN LINE. | |
| 4 | CONSTRUCT STORM DRAIN MANHOLE FOR 36" PIPE. | 1/22 |
| 5 | INSTALL 36" RCP STORM DRAIN PIPE. | 1/22 |
| 6 | INSTALL 6" SDR-35 SEWER PIPE. | 1/22 |
| 7 | INSTALL SEWER CLEANOUT. | 1/25 |
| 8 | TRANSFER EXISTING RESIDENTIAL SEWER SERVICE TO NEW SEWER LINE. | 2/25 |
| SURFACE IMPROVEMENTS | | |
| 9 | REMOVE AND REPLACE EXISTING AC WITHIN TRENCH AREA. TRENCH AREA EDGES ARE TO BE SAWCUT. AC MAY BE PULVERIZED AND REUSED AS BASE BELOW AB. | |

ESTIMATED QUANTITIES	
INSTALL 36" RCP STORM DRAIN PIPE	400 LF
CONSTRUCT MANHOLE	1 EA
INSTALL 6" SDR-35 SEWER	294 LF

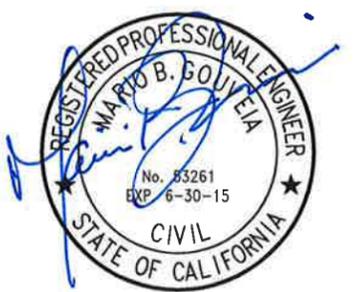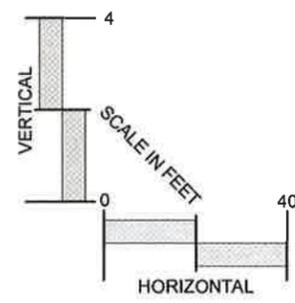

Apr 03, 2015 - 3:03pm
V:\CL\1416107\cadd\pinonmeas4002C-111.dwg


REV	DATE	DESCRIPTION	APPR

OWNERSHIP OF DOCUMENTS
THIS DOCUMENT, AND THE CONCEPTS AND DESIGNS PRESENTED HEREIN, AS AN INSTRUMENT OF SERVICE, IS THE PROPERTY OF GOUVEIA ENGINEERING, INC., AND IS INTENDED ONLY FOR THE SPECIFIC PURPOSE AND CLIENT FOR WHICH IT WAS PREPARED. REUSE, IN WHOLE OR IN PART, IS NOT PERMITTED WITHOUT WRITTEN AUTHORIZATION BY GOUVEIA ENGINEERING, INC.


GOUVEIA ENGINEERING, INC.
 CONSULTING ENGINEERS
 456 Sixth Street • Gustine, California 95322
 Telephone (209) 854-3300 • Fax (209) 854-3600

CITY OF LOS BANOS
HENRY MILLER AREA STORM DRAIN AND L STREET WATERLINE
TEXAS AVENUE
IMPROVEMENTS STA. 16+00 TO 20+00



DESIGNED BY NWF, DGR	DATE 03/27/2015	DRAWING C-113
DRAWN BY NWF, AMT, DGR	DATE 04/02/2015	SHEET
CHECKED BY M. GOUVEIA	DATE 04/02/2015	13
APPROVED M. GOUVEIA	DATE 04/03/2015	OF 27 SHEETS PROJECT NUMBER 835.02, 840.02

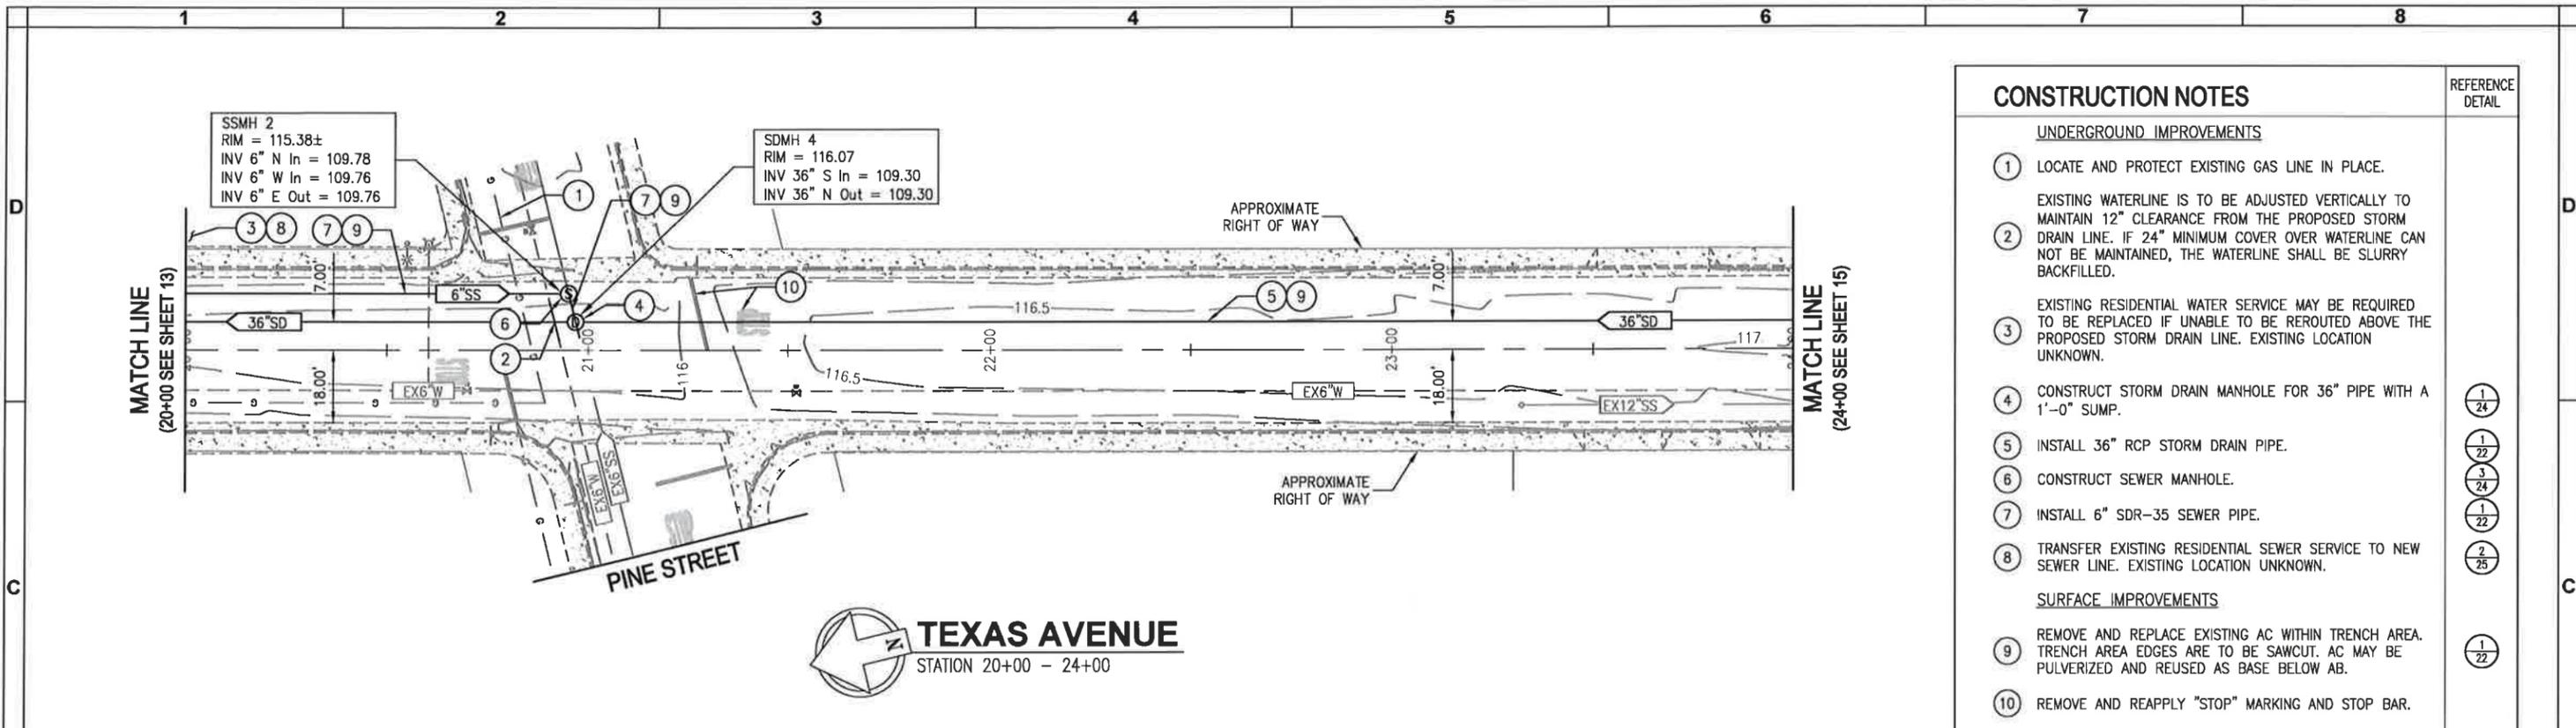

TEXAS AVENUE
STATION 20+00 - 24+00

CONSTRUCTION NOTES		REFERENCE DETAIL
<u>UNDERGROUND IMPROVEMENTS</u>		
1	LOCATE AND PROTECT EXISTING GAS LINE IN PLACE.	
2	EXISTING WATERLINE IS TO BE ADJUSTED VERTICALLY TO MAINTAIN 12" CLEARANCE FROM THE PROPOSED STORM DRAIN LINE. IF 24" MINIMUM COVER OVER WATERLINE CAN NOT BE MAINTAINED, THE WATERLINE SHALL BE SLURRY BACKFILLED.	
3	EXISTING RESIDENTIAL WATER SERVICE MAY BE REQUIRED TO BE REPLACED IF UNABLE TO BE REROUTED ABOVE THE PROPOSED STORM DRAIN LINE. EXISTING LOCATION UNKNOWN.	
4	CONSTRUCT STORM DRAIN MANHOLE FOR 36" PIPE WITH A 1'-0" SUMP.	1/24
5	INSTALL 36" RCP STORM DRAIN PIPE.	1/22
6	CONSTRUCT SEWER MANHOLE.	3/24
7	INSTALL 6" SDR-35 SEWER PIPE.	1/22
8	TRANSFER EXISTING RESIDENTIAL SEWER SERVICE TO NEW SEWER LINE. EXISTING LOCATION UNKNOWN.	2/25
<u>SURFACE IMPROVEMENTS</u>		
9	REMOVE AND REPLACE EXISTING AC WITHIN TRENCH AREA. TRENCH AREA EDGES ARE TO BE SAWCUT. AC MAY BE PULVERIZED AND REUSED AS BASE BELOW AB.	1/22
10	REMOVE AND REAPPLY "STOP" MARKING AND STOP BAR.	

ESTIMATED QUANTITIES	
INSTALL 36" STORM DRAIN PIPE	400 LF
CONSTRUCT MANHOLE	2 EA
INSTALL 6" SDR-35 SEWER	95 LF
THERMOPLASTIC MARKINGS	41 SF

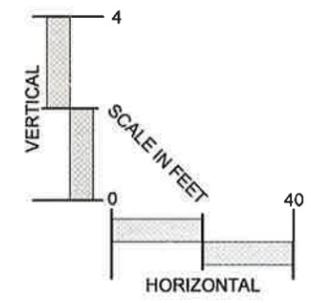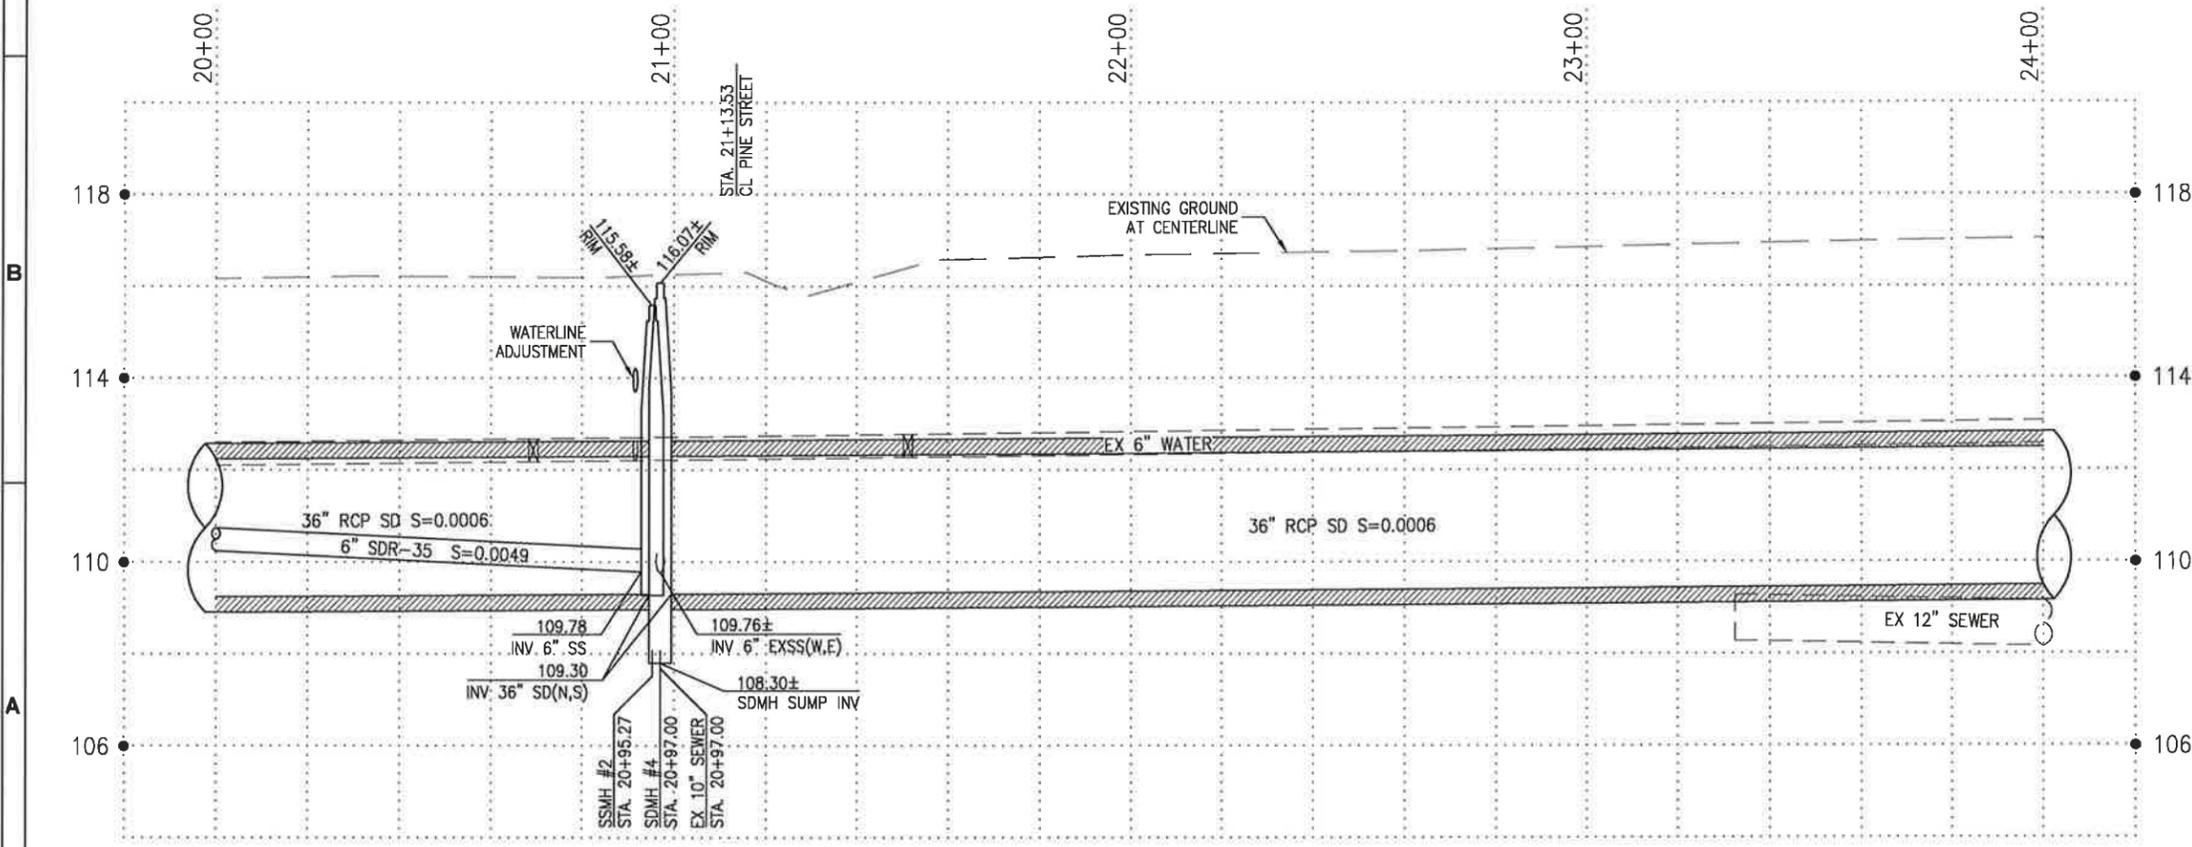

Apr 03, 2015 - 3:04pm
V:\CL\940720\civil\gouveia\mario\1402C-111.dwg


REV	DATE	DESCRIPTION	APPR
1			
2			
3			
4			
5			
6			
7			
8			

OWNERSHIP OF DOCUMENTS
THIS DOCUMENT, AND THE CONCEPTS AND DESIGNS PRESENTED HEREIN, AS AN INSTRUMENT OF SERVICE, IS THE PROPERTY OF GOUVEIA ENGINEERING, INC., AND IS INTENDED ONLY FOR THE SPECIFIC PURPOSE AND CLIENT FOR WHICH IT WAS PREPARED. REUSE, IN WHOLE OR IN PART, IS NOT PERMITTED WITHOUT WRITTEN AUTHORIZATION BY GOUVEIA ENGINEERING, INC.

GOUVEIA ENGINEERING, INC.
CONSULTING ENGINEERS
456 Sixth Street • Gustine, California 95322
Telephone (209) 854-3300 • Fax (209) 854-3600




CITY OF LOS BANOS
HENRY MILLER AREA STORM DRAIN AND L STREET WATERLINE
TEXAS AVENUE
IMPROVEMENTS STA. 20+00 - 24+00

DESIGNED BY NWF, DGR	DATE 03/27/2015	DRAWING C-114
DRAWN BY NWF, AMT, DGR	DATE 04/02/2015	SHEET 14
CHECKED BY M. GOUVEIA	DATE 04/02/2015	OF 27 SHEETS
APPROVED M. GOUVEIA	DATE 04/03/2015	PROJECT NUMBER 835.02, 840.02

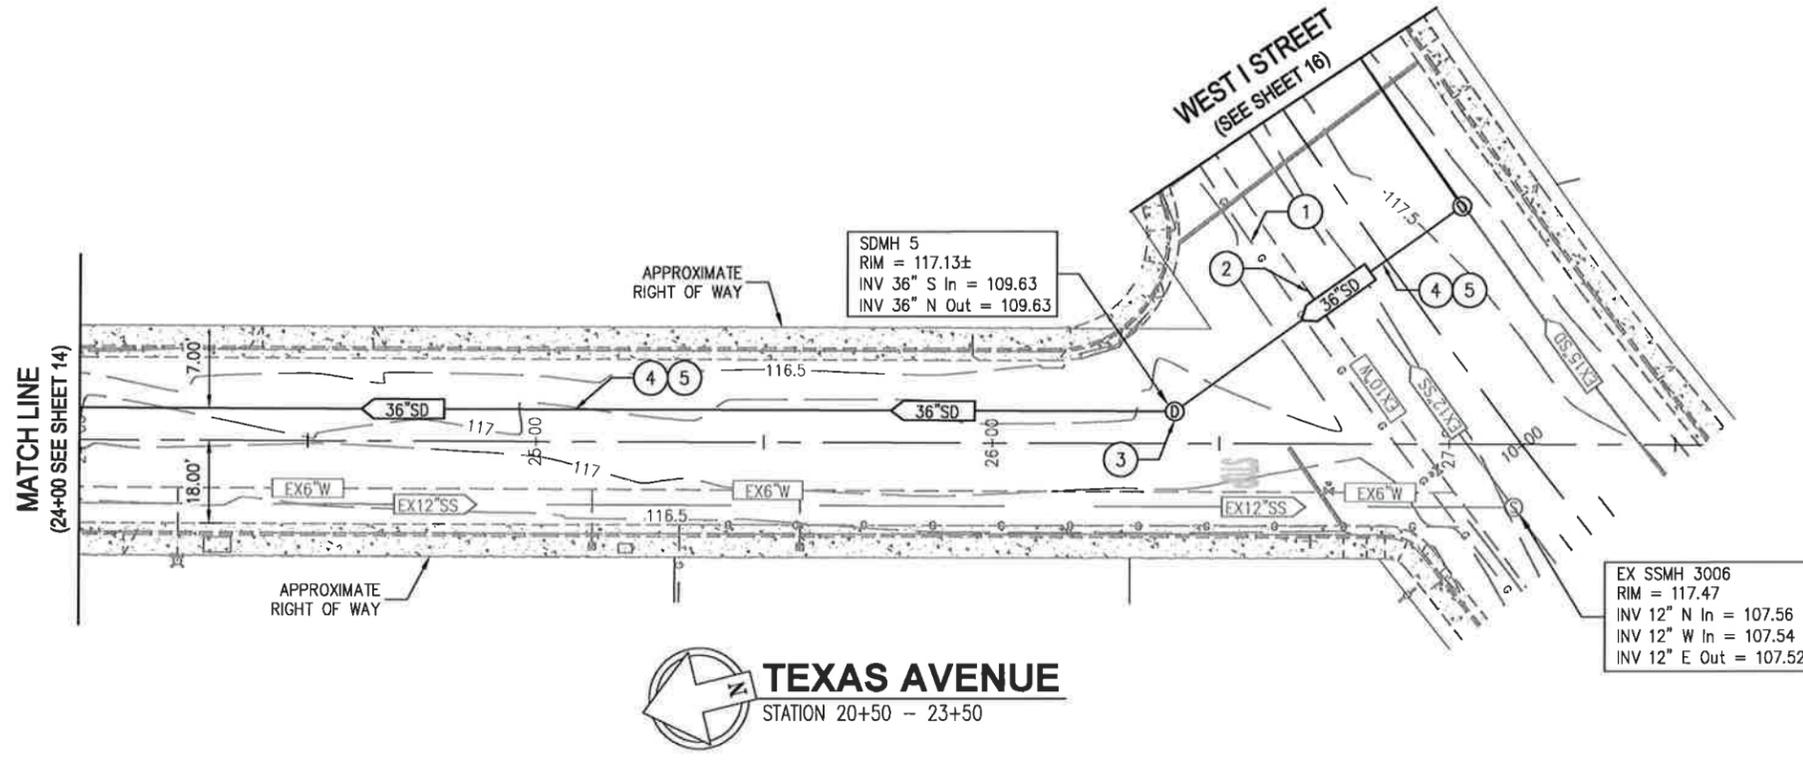

CONSTRUCTION NOTES		REFERENCE DETAIL
UNDERGROUND IMPROVEMENTS		
1	LOCATE AND PROTECT EXISTING GAS LINE IN PLACE.	
2	EXISTING WATERLINE IS TO BE ADJUSTED VERTICALLY TO MAINTAIN 12" CLEARANCE FROM THE PROPOSED STORM DRAIN LINE. IF 24" MINIMUM COVER OVER WATERLINE CAN NOT BE MAINTAINED, THE WATERLINE SHALL BE SLURRY BACKFILLED.	
3	CONSTRUCT STORM DRAIN MANHOLE FOR 36" PIPE.	1/24
4	INSTALL 36" RCP STORM DRAIN PIPE.	1/22
SURFACE IMPROVEMENTS		
5	REMOVE AND REPLACE EXISTING AC WITHIN TRENCH AREA. TRENCH AREA EDGES ARE TO BE SAWCUT. AC MAY BE PULVERIZED AND REUSED AS BASE BELOW AB.	1/22

ESTIMATED QUANTITIES	
INSTALL 36" STORM DRAIN PIPE	315 LF
CONSTRUCT MANHOLE	1 EA

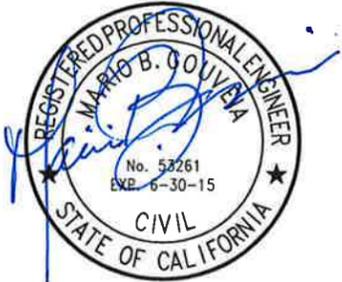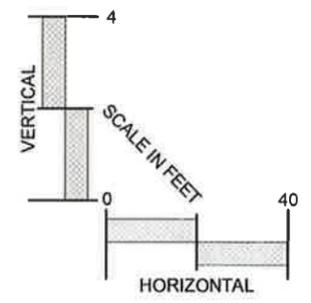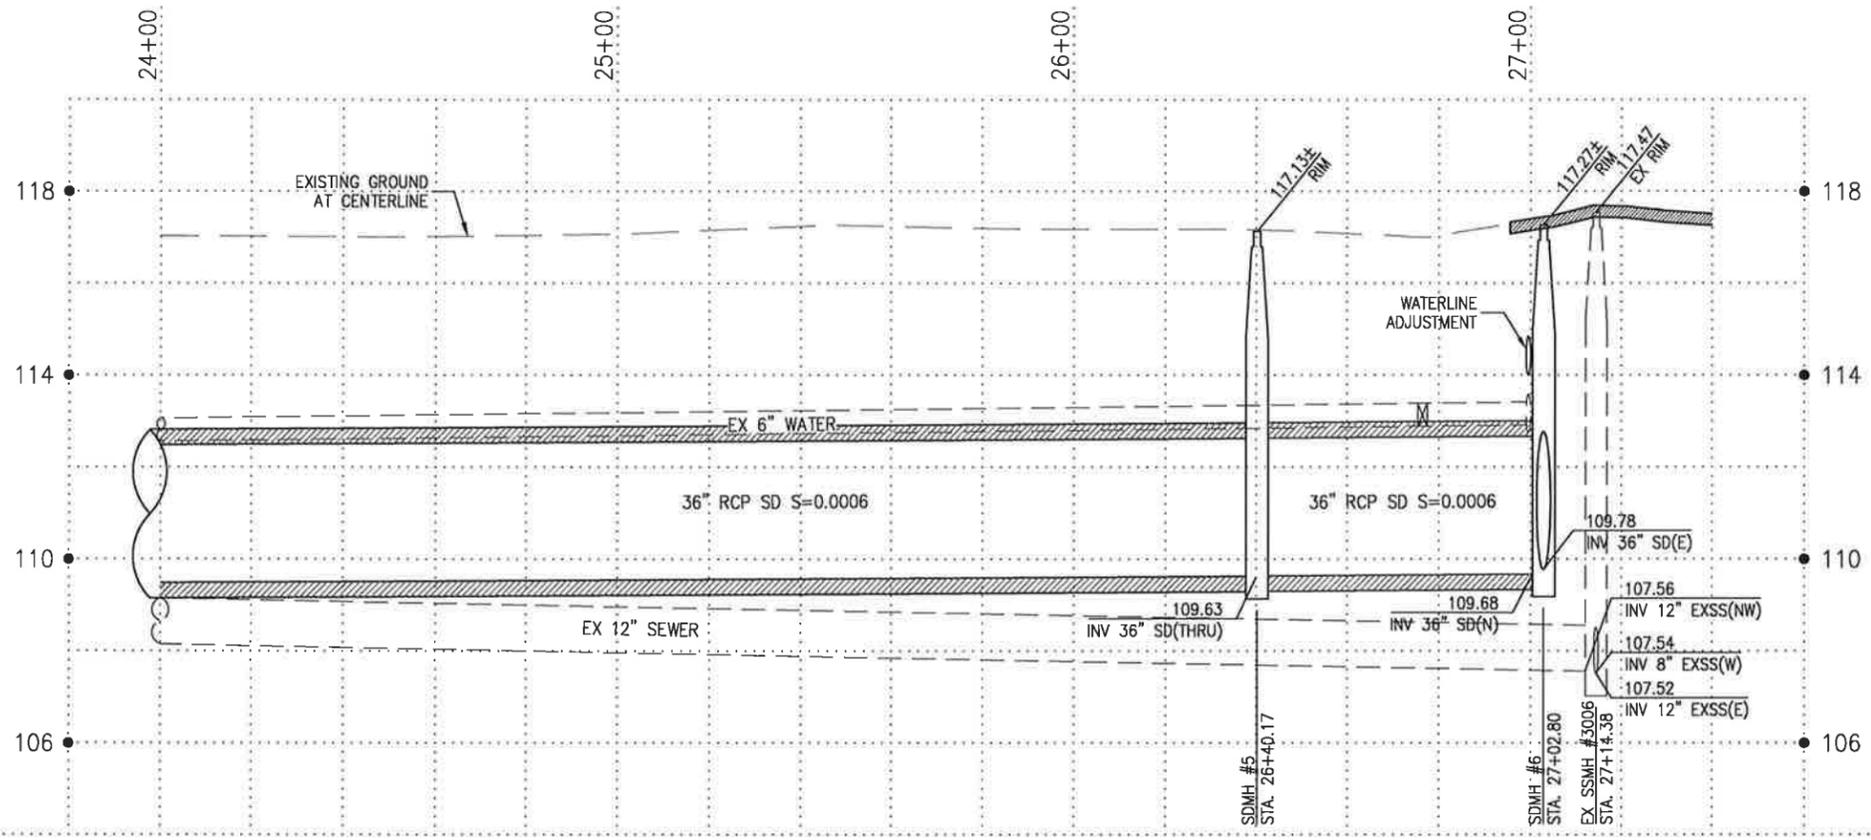

Apr 03, 2016 - 3:16pm
V:\CADD\2015\20150402\111.dwg



REV	DATE	DESCRIPTION	APPR
1			
2			

OWNERSHIP OF DOCUMENTS
THIS DOCUMENT, AND THE CONCEPTS AND DESIGNS PRESENTED HEREIN, AS AN INSTRUMENT OF SERVICE, IS THE PROPERTY OF GOUVEIA ENGINEERING, INC., AND IS INTENDED ONLY FOR THE SPECIFIC PURPOSE AND CLIENT FOR WHICH IT WAS PREPARED. REUSE, IN WHOLE OR IN PART, IS NOT PERMITTED WITHOUT WRITTEN AUTHORIZATION BY GOUVEIA ENGINEERING, INC.

GOUVEIA ENGINEERING, INC.
CONSULTING ENGINEERS
456 Sixth Street • Gustine, California 95322
Telephone (209) 854-3300 • Fax (209) 854-3600


CITY OF LOS BANOS
HENRY MILLER AREA STORM DRAIN AND L STREET WATERLINE
TEXAS AVENUE
IMPROVEMENTS STA. 24+00 TO 27+00

DESIGNED BY NWF, DGR	DATE 03/27/2015	DRAWING C-115
DRAWN BY NWF, AMT, DGR	DATE 04/02/2015	SHEET 15
CHECKED BY M. GOUVEIA	DATE 04/02/2015	OF 27 SHEETS
APPROVED M. GOUVEIA	DATE 04/03/2015	PROJECT NUMBER 835.02, 840.02

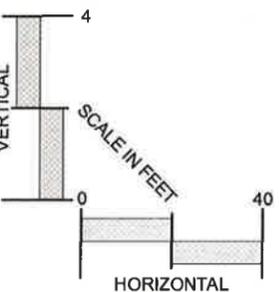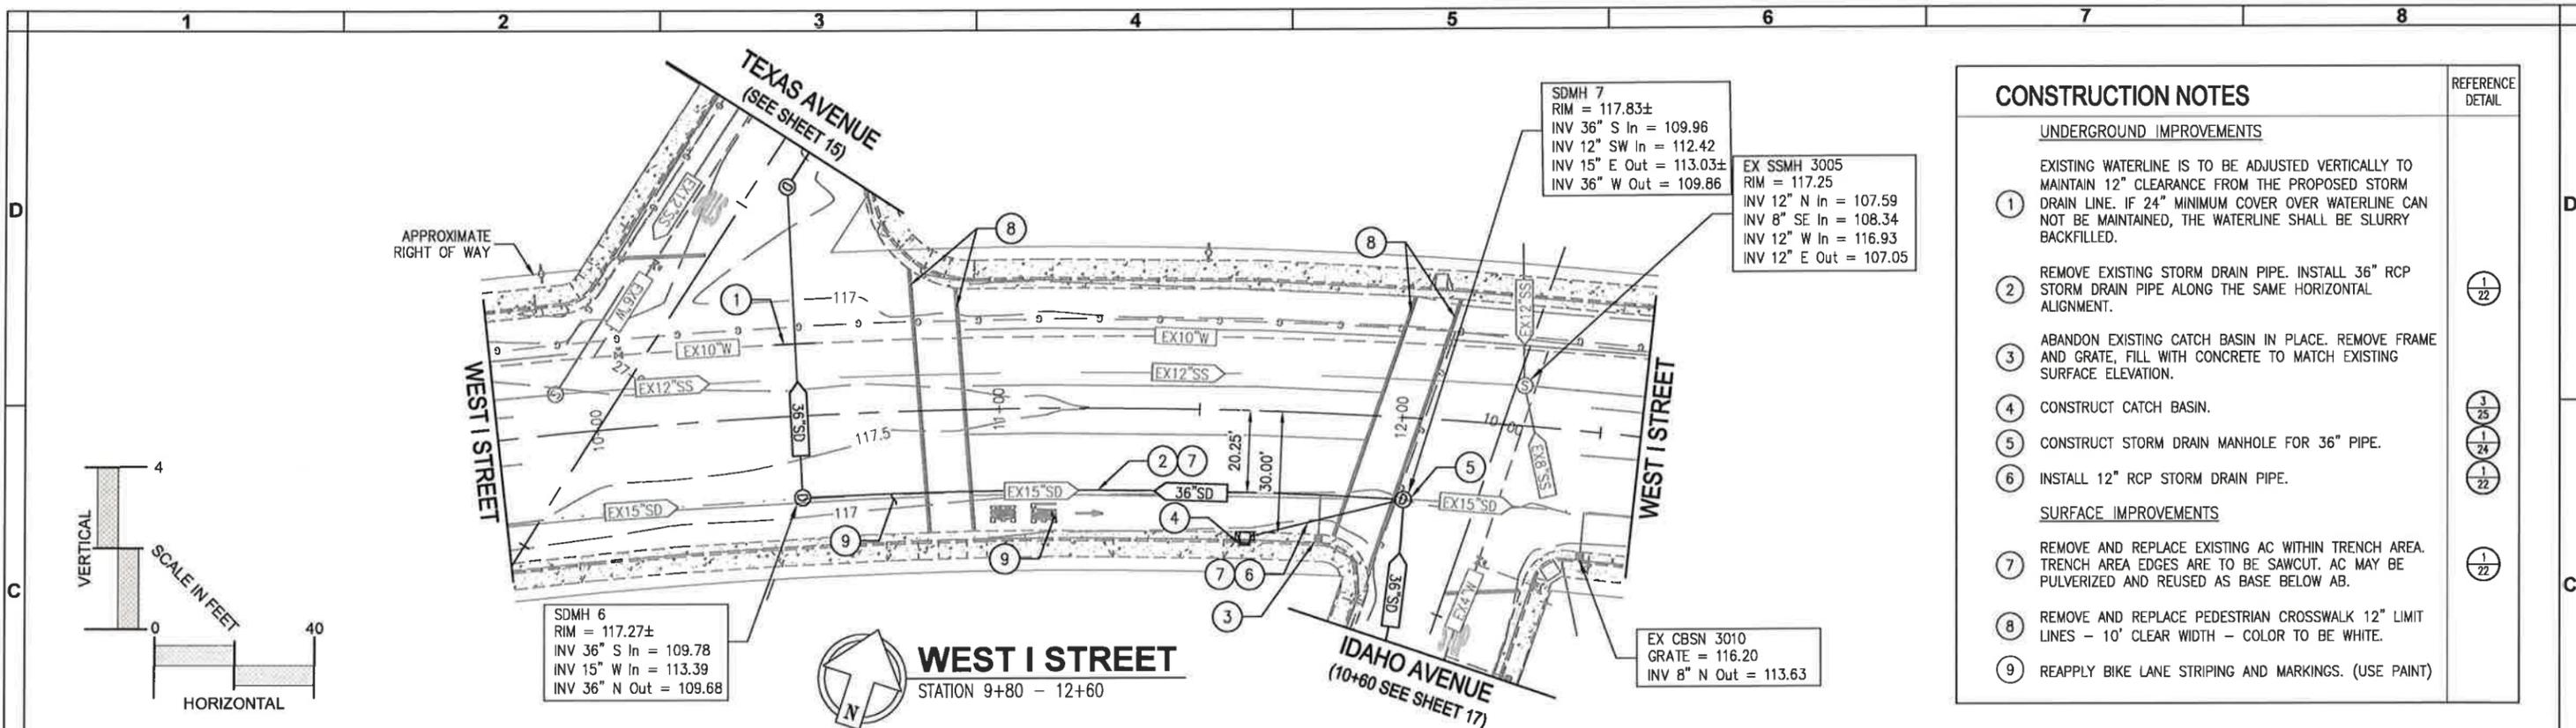

CONSTRUCTION NOTES		REFERENCE DETAIL
UNDERGROUND IMPROVEMENTS		
1	EXISTING WATERLINE IS TO BE ADJUSTED VERTICALLY TO MAINTAIN 12" CLEARANCE FROM THE PROPOSED STORM DRAIN LINE. IF 24" MINIMUM COVER OVER WATERLINE CAN NOT BE MAINTAINED, THE WATERLINE SHALL BE SLURRY BACKFILLED.	1/22
2	REMOVE EXISTING STORM DRAIN PIPE. INSTALL 36" RCP STORM DRAIN PIPE ALONG THE SAME HORIZONTAL ALIGNMENT.	1/22
3	ABANDON EXISTING CATCH BASIN IN PLACE. REMOVE FRAME AND GRATE, FILL WITH CONCRETE TO MATCH EXISTING SURFACE ELEVATION.	3/25
4	CONSTRUCT CATCH BASIN.	1/24
5	CONSTRUCT STORM DRAIN MANHOLE FOR 36" PIPE.	1/22
6	INSTALL 12" RCP STORM DRAIN PIPE.	1/22
SURFACE IMPROVEMENTS		
7	REMOVE AND REPLACE EXISTING AC WITHIN TRENCH AREA. TRENCH AREA EDGES ARE TO BE SAWCUT. AC MAY BE PULVERIZED AND REUSED AS BASE BELOW AB.	1/22
8	REMOVE AND REPLACE PEDESTRIAN CROSSWALK 12" LIMIT LINES - 10' CLEAR WIDTH - COLOR TO BE WHITE.	
9	REAPPLY BIKE LANE STRIPING AND MARKINGS. (USE PAINT)	

ESTIMATED QUANTITIES	
INSTALL 36" STORM DRAIN PIPE	147 LF
INSTALL 12" STORM DRAIN PIPE	40 LF
CONSTRUCT MANHOLE	2 EA
CONSTRUCT CATCH BASIN	1 EA
THERMOPLASTIC MARKINGS	258 SF
PAINT STRIPING	130 LF
PAINT MARKINGS	18 SF

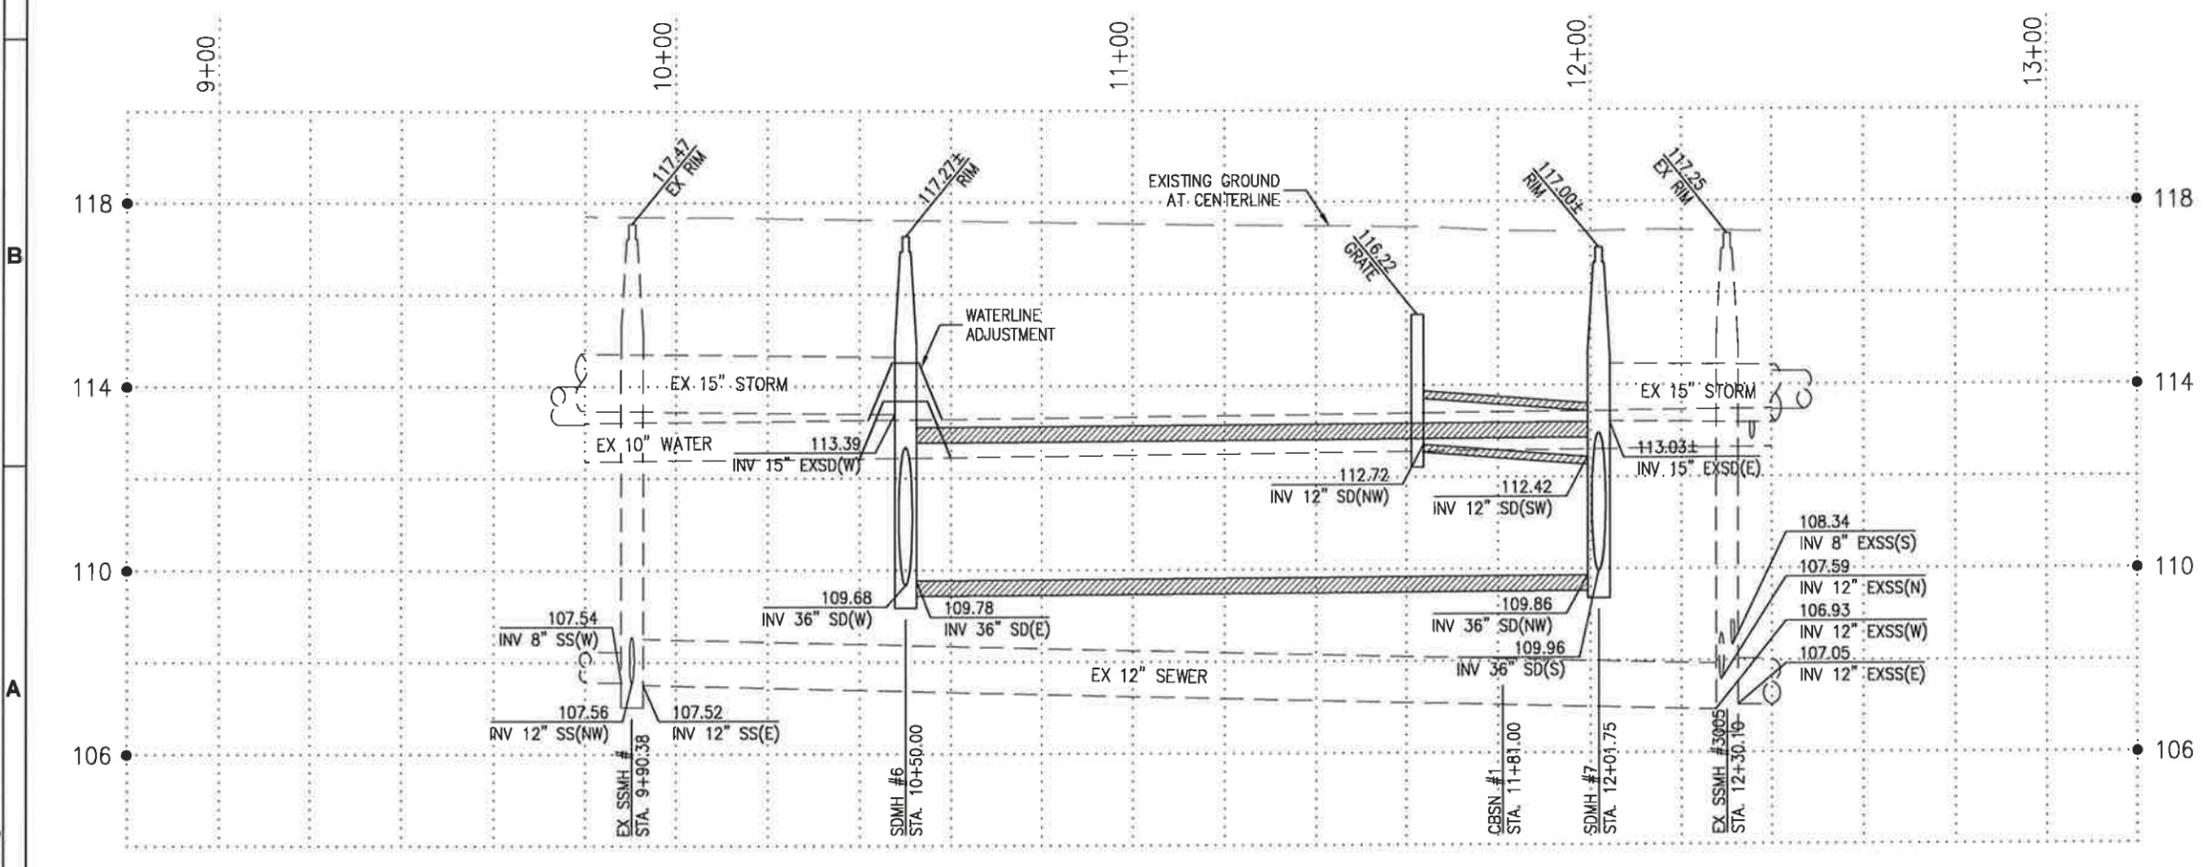

Apr 03, 2015 - 3:46pm
V:\C1\B04022\cadd\plan\854022-111.dwg

REV	DATE	DESCRIPTION	APPR
1			
2			

OWNERSHIP OF DOCUMENTS
THIS DOCUMENT, AND THE CONCEPTS AND DESIGNS PRESENTED HEREIN, AS AN INSTRUMENT OF SERVICE, IS THE PROPERTY OF GOUVEIA ENGINEERING, INC., AND IS INTENDED ONLY FOR THE SPECIFIC PURPOSE AND CLIENT FOR WHICH IT WAS PREPARED. REUSE, IN WHOLE OR IN PART, IS NOT PERMITTED WITHOUT WRITTEN AUTHORIZATION BY GOUVEIA ENGINEERING, INC.

GOUVEIA ENGINEERING, INC.
CONSULTING ENGINEERS
456 Sixth Street • Gustine, California 95322
Telephone (209) 854-3300 • Fax (209) 854-3600

CITY OF LOS BANOS
HENRY MILLER AREA STORM DRAIN AND L STREET WATERLINE
WEST I STREET
IMPROVEMENTS STA. 9+80 TO 12+60


DESIGNED BY	DATE	DRAWING
NWF, DGR	03/27/2015	C-116
DRAWN BY	DATE	SHEET
NWF, AMT, DGR	04/02/2015	16
CHECKED BY	DATE	OF 27 SHEETS
M. GOUVEIA	04/02/2015	PROJECT NUMBER
APPROVED	DATE	835.02, 840.02
M. GOUVEIA	04/03/2015	

EX SSMH 3005
RIM = 117.25
INV 12" N In = 107.59
INV 8" SE In = 108.34
INV 12" W In = 116.93
INV 12" E Out = 107.05



SDMH 7
RIM = 117.00±
INV 12" W In = 112.42
INV 36" S In = 109.96
INV 15" E Out = 113.03±
INV 36" W Out = 109.86

CONSTRUCTION NOTES		REFERENCE DETAIL
UNDERGROUND IMPROVEMENTS		
①	LOCATE AND PROTECT EXISTING GAS LINE IN PLACE.	1/22
②	INSTALL 36" RCP STORM DRAIN PIPE.	1/22
SURFACE IMPROVEMENTS		
③	REMOVE AND REPLACE EXISTING AC WITHIN TRENCH AREA. TRENCH AREA EDGES ARE TO BE SAWCUT. AC MAY BE PULVERIZED AND REUSED AS BASE BELOW AB.	1/22

ESTIMATED QUANTITIES	
INSTALL 36" RCP STORM DRAIN PIPE	275 LF

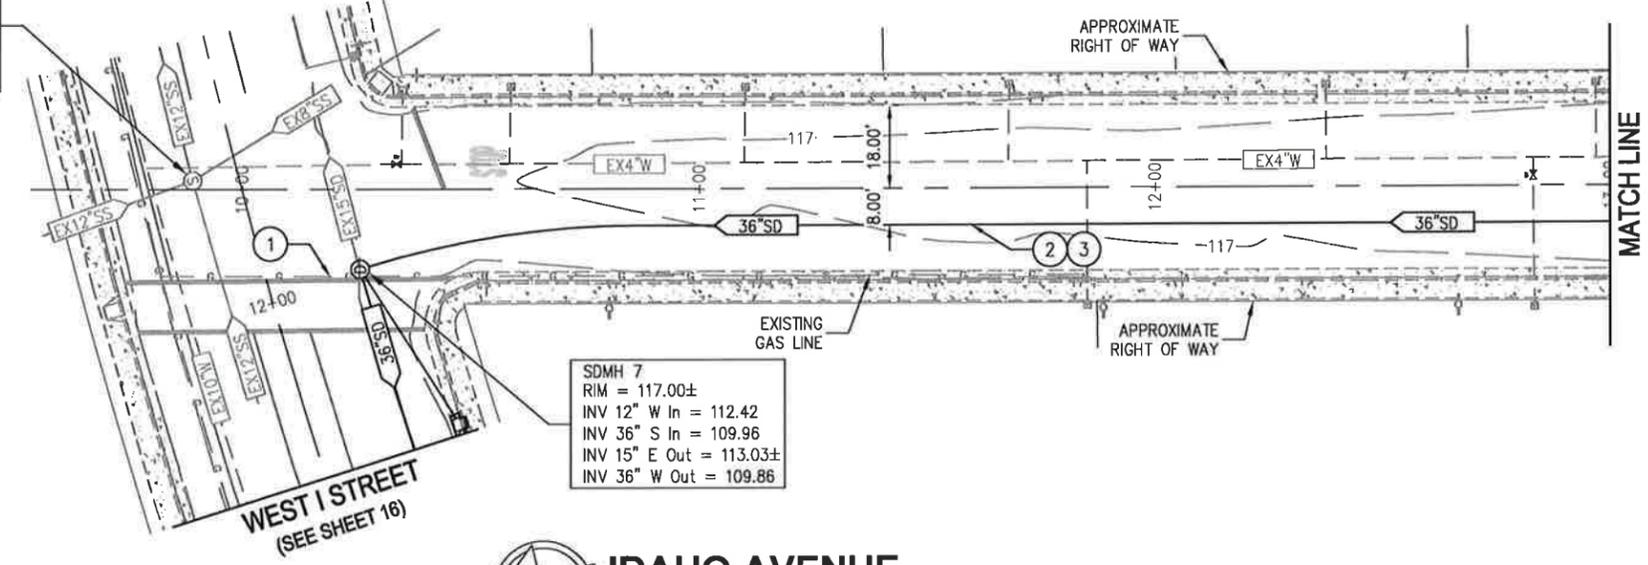

IDAHO AVENUE
STATION 9+60 - 13+00

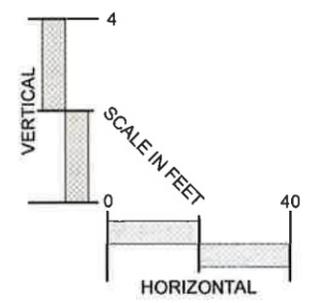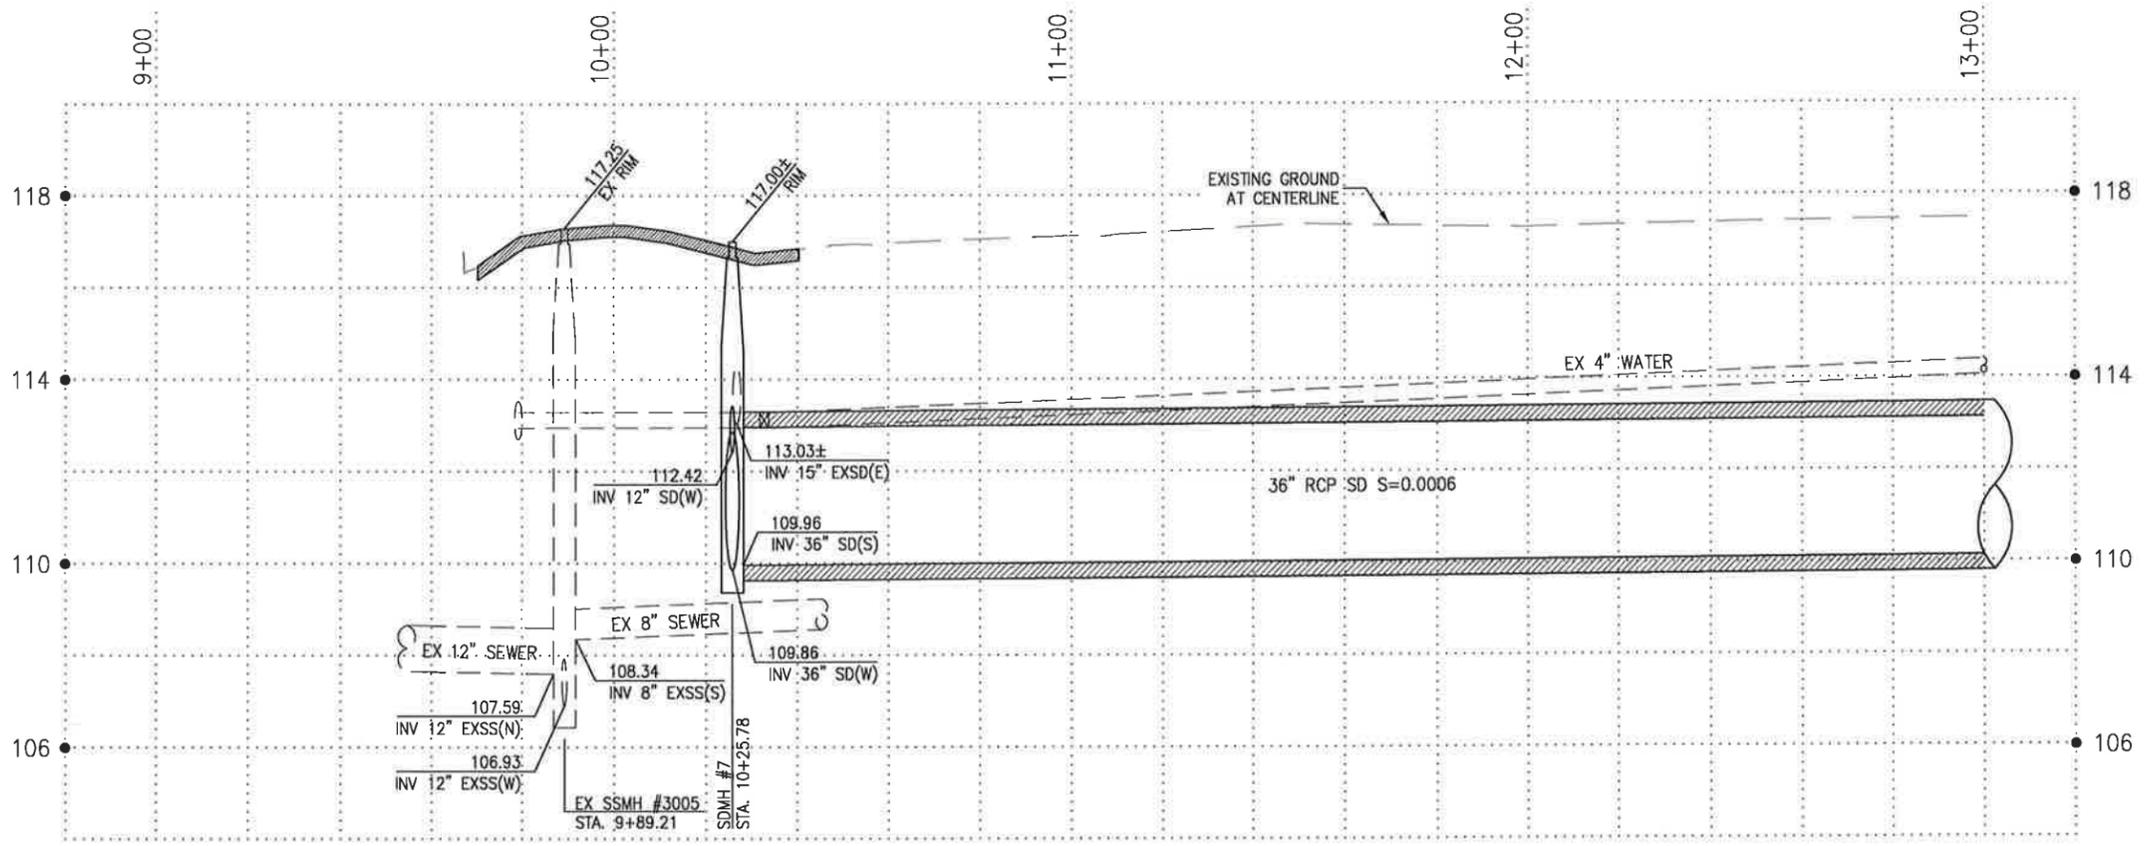

Apr 03, 2015 - 2:07 pm
V:\C\B\040702\california\84002C-117.dwg


REV	DATE	DESCRIPTION	APPR

OWNERSHIP OF DOCUMENTS
THIS DOCUMENT, AND THE CONCEPTS AND DESIGNS PRESENTED HEREIN, AS AN INSTRUMENT OF SERVICE, IS THE PROPERTY OF GOUVEIA ENGINEERING, INC., AND IS INTENDED ONLY FOR THE SPECIFIC PURPOSE AND CLIENT FOR WHICH IT WAS PREPARED. REUSE, IN WHOLE OR IN PART, IS NOT PERMITTED WITHOUT WRITTEN AUTHORIZATION BY GOUVEIA ENGINEERING, INC.

GOUVEIA ENGINEERING, INC.
CONSULTING ENGINEERS
456 Sixth Street • Gustine, California 95322
Telephone (209) 854-3300 • Fax (209) 854-3600



CITY OF LOS BANOS
HENRY MILLER AREA STORM DRAIN AND L STREET WATERLINE
IDAHO AVENUE
IMPROVEMENTS STA. 9+60 TO 13+00

DESIGNED BY NWF, DGR	DATE 03/27/2015	DRAWING C-117
DRAWN BY NWF, AMT, DGR	DATE 04/02/2015	SHEET 17
CHECKED BY M. GOUVEIA	DATE 04/02/2015	OF 27 SHEETS
APPROVED M. GOUVEIA	DATE 04/03/2015	PROJECT NUMBER 835.02, 840.02

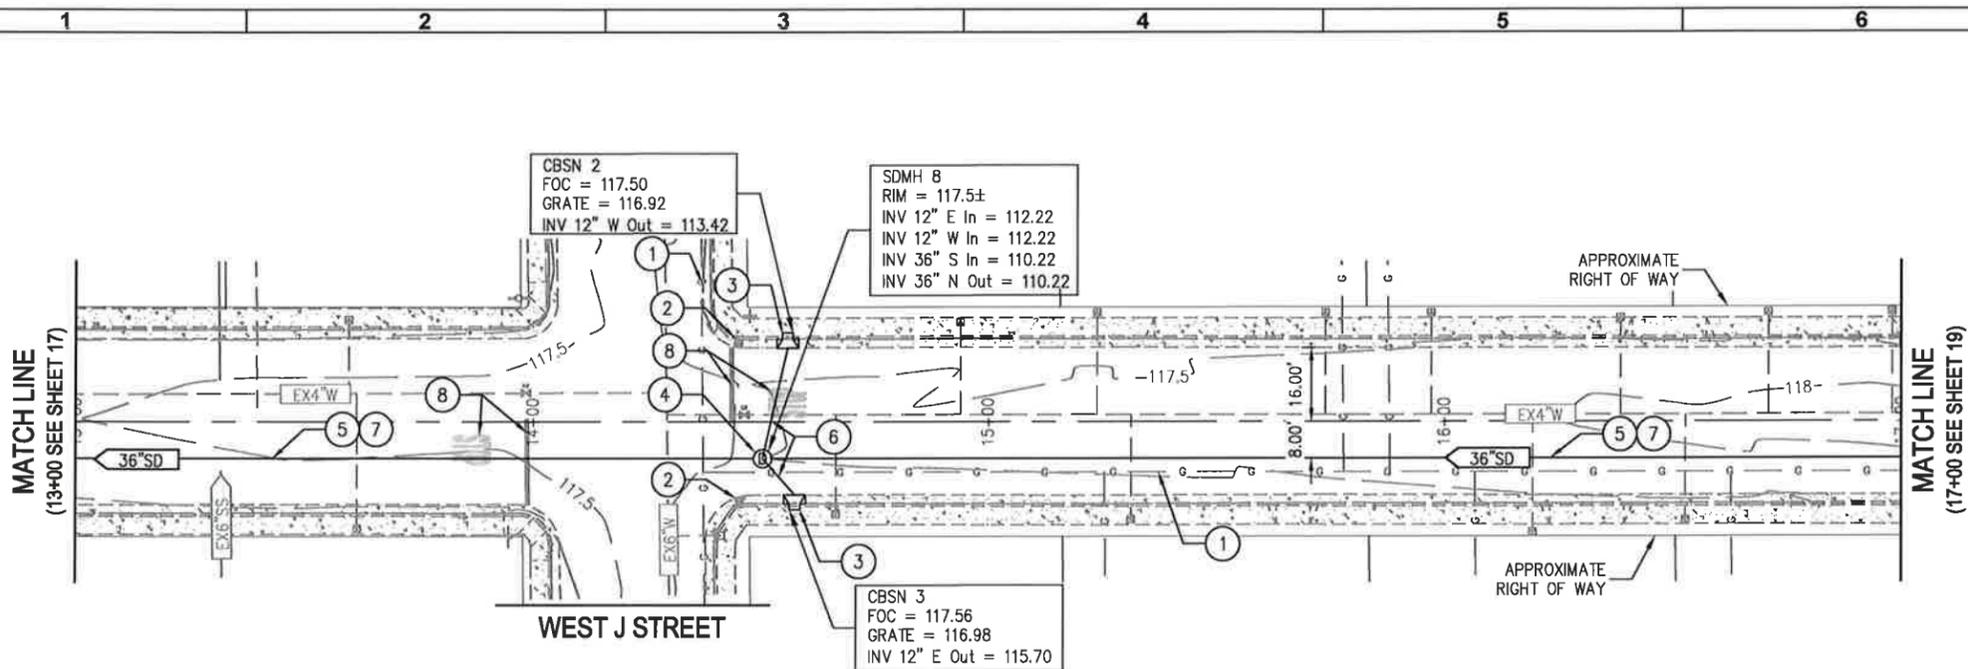

CONSTRUCTION NOTES		REFERENCE DETAIL
UNDERGROUND IMPROVEMENTS		
①	LOCATE AND PROTECT EXISTING GAS LINE IN PLACE.	
②	ABANDON EXISTING CATCH BASIN IN PLACE. REMOVE FRAME AND GRATE, FILL WITH CONCRETE TO MATCH EXISTING SURFACE ELEVATION.	3/25
③	CONSTRUCT CATCH BASIN	1/24
④	CONSTRUCT STORM DRAIN MANHOLE FOR 36" PIPE.	1/22
⑤	INSTALL 36" RCP STORM DRAIN PIPE.	1/22
⑥	INSTALL 12" RCP STORM DRAIN PIPE.	1/22
SURFACE IMPROVEMENTS		
⑦	REMOVE AND REPLACE EXISTING AC WITHIN TRENCH AREA. TRENCH AREA EDGES ARE TO BE SAWCUT. AC MAY BE PULVERIZED AND REUSED AS BASE BELOW AB.	1/22
⑧	REMOVE AND REAPPLY "STOP" MARKING AND STOP BAR.	

ESTIMATED QUANTITIES	
INSTALL 36" RCP STORM DRAIN PIPE	400 LF
INSTALL 12" RCP STORM DRAIN PIPE	35 LF
CONSTRUCT MANHOLE	1 EA
CONSTRUCT CATCH BASIN	2 EA
THERMOPLASTIC MARKINGS	81 SF

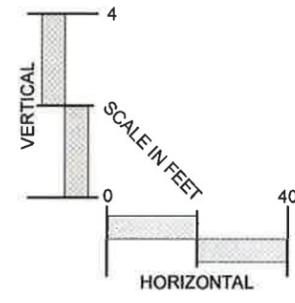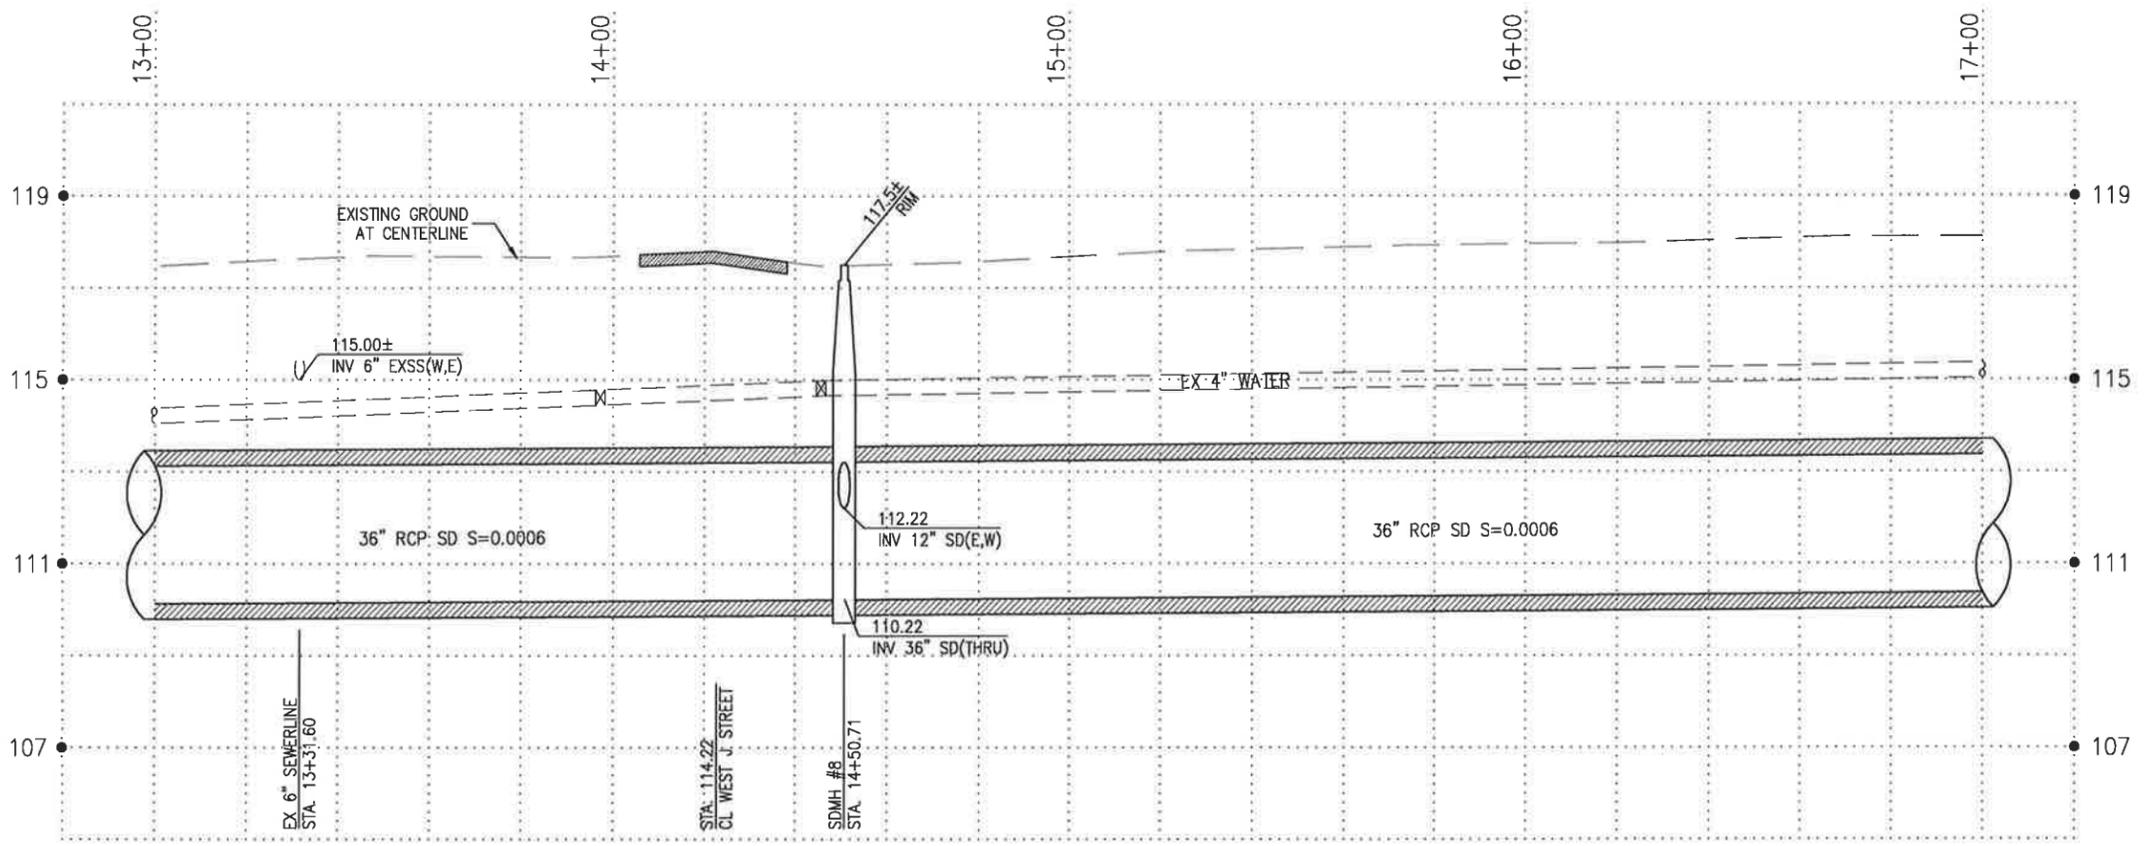

REV	DATE	DESCRIPTION	APPR
1			
2			


OWNERSHIP OF DOCUMENTS
 THIS DOCUMENT, AND THE CONCEPTS AND DESIGNS PRESENTED HEREIN, AS AN INSTRUMENT OF SERVICE, IS THE PROPERTY OF GOUVEIA ENGINEERING, INC., AND IS INTENDED ONLY FOR THE SPECIFIC PURPOSE AND CLIENT FOR WHICH IT WAS PREPARED. REUSE, IN WHOLE OR IN PART, IS NOT PERMITTED WITHOUT WRITTEN AUTHORIZATION BY GOUVEIA ENGINEERING, INC.

GOUVEIA ENGINEERING, INC.
 CONSULTING ENGINEERS
 456 Sixth Street • Gustine, California 95322
 Telephone (209) 854-3300 • Fax (209) 854-3600

CITY OF LOS BANOS
HENRY MILLER AREA STORM DRAIN AND L STREET WATERLINE
IDAHO AVENUE
IMPROVEMENTS STA. 13+00 TO 17+00

DESIGNED BY NWF, DGR	DATE 03/27/2015	DRAWING C-118
DRAWN BY NWF, AMT, DGR	DATE 04/02/2015	SHEET 18
CHECKED BY M. GOUVEIA	DATE 04/02/2015	OF 27 SHEETS
APPROVED M. GOUVEIA	DATE 04/03/2015	PROJECT NUMBER 835.02, 840.02



Apr 03, 2016 - 2:07pm
 V:\CL\BIB\02\cad\dwg\16002C-117.dwg

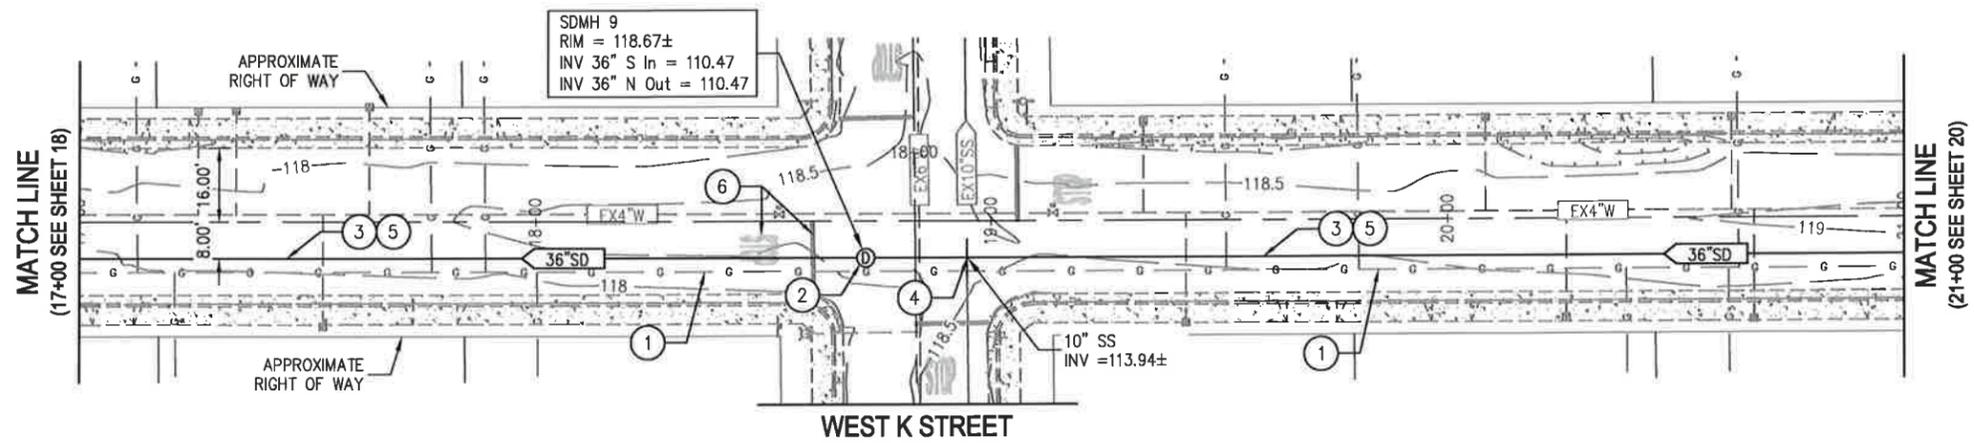

CONSTRUCTION NOTES		REFERENCE DETAIL
UNDERGROUND IMPROVEMENTS		
①	LOCATE AND PROTECT EXISTING GAS LINE IN PLACE.	1/24
②	CONSTRUCT STORM DRAIN MANHOLE FOR 36" PIPE.	1/22
③	INSTALL 36" RCP STORM DRAIN PIPE.	
④	REMOVE AN 8' SECTION OF THE EXISTING SEWER PIPE AND REPLACE WITH A SECTION OF 10" C900 PVC PIPE. THE REMOVED SECTION SHALL BE CENTERED ON THE CENTER OF THE PROPOSED 36" RCP STORM DRAIN PIPE.	
SURFACE IMPROVEMENTS		
⑤	REMOVE AND REPLACE EXISTING AC WITHIN TRENCH AREA. TRENCH AREA EDGES ARE TO BE SAWCUT. AC MAY BE PULVERIZED AND REUSED AS BASE BELOW AB.	1/22
⑥	REMOVE AND REAPPLY "STOP" MARKING AND STOP BAR.	

ESTIMATED QUANTITIES	
INSTALL 36" STORM DRAIN PIPE	400 LF
INSTALL 10" C900 SS PIPE	8 LF
CONSTRUCT MANHOLE	1 EA
THERMOPLASTIC MARKINGS	39 SF

IDAHO AVENUE
 STATION 17+00 - 21+00

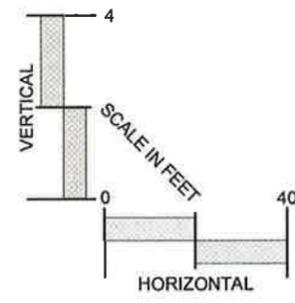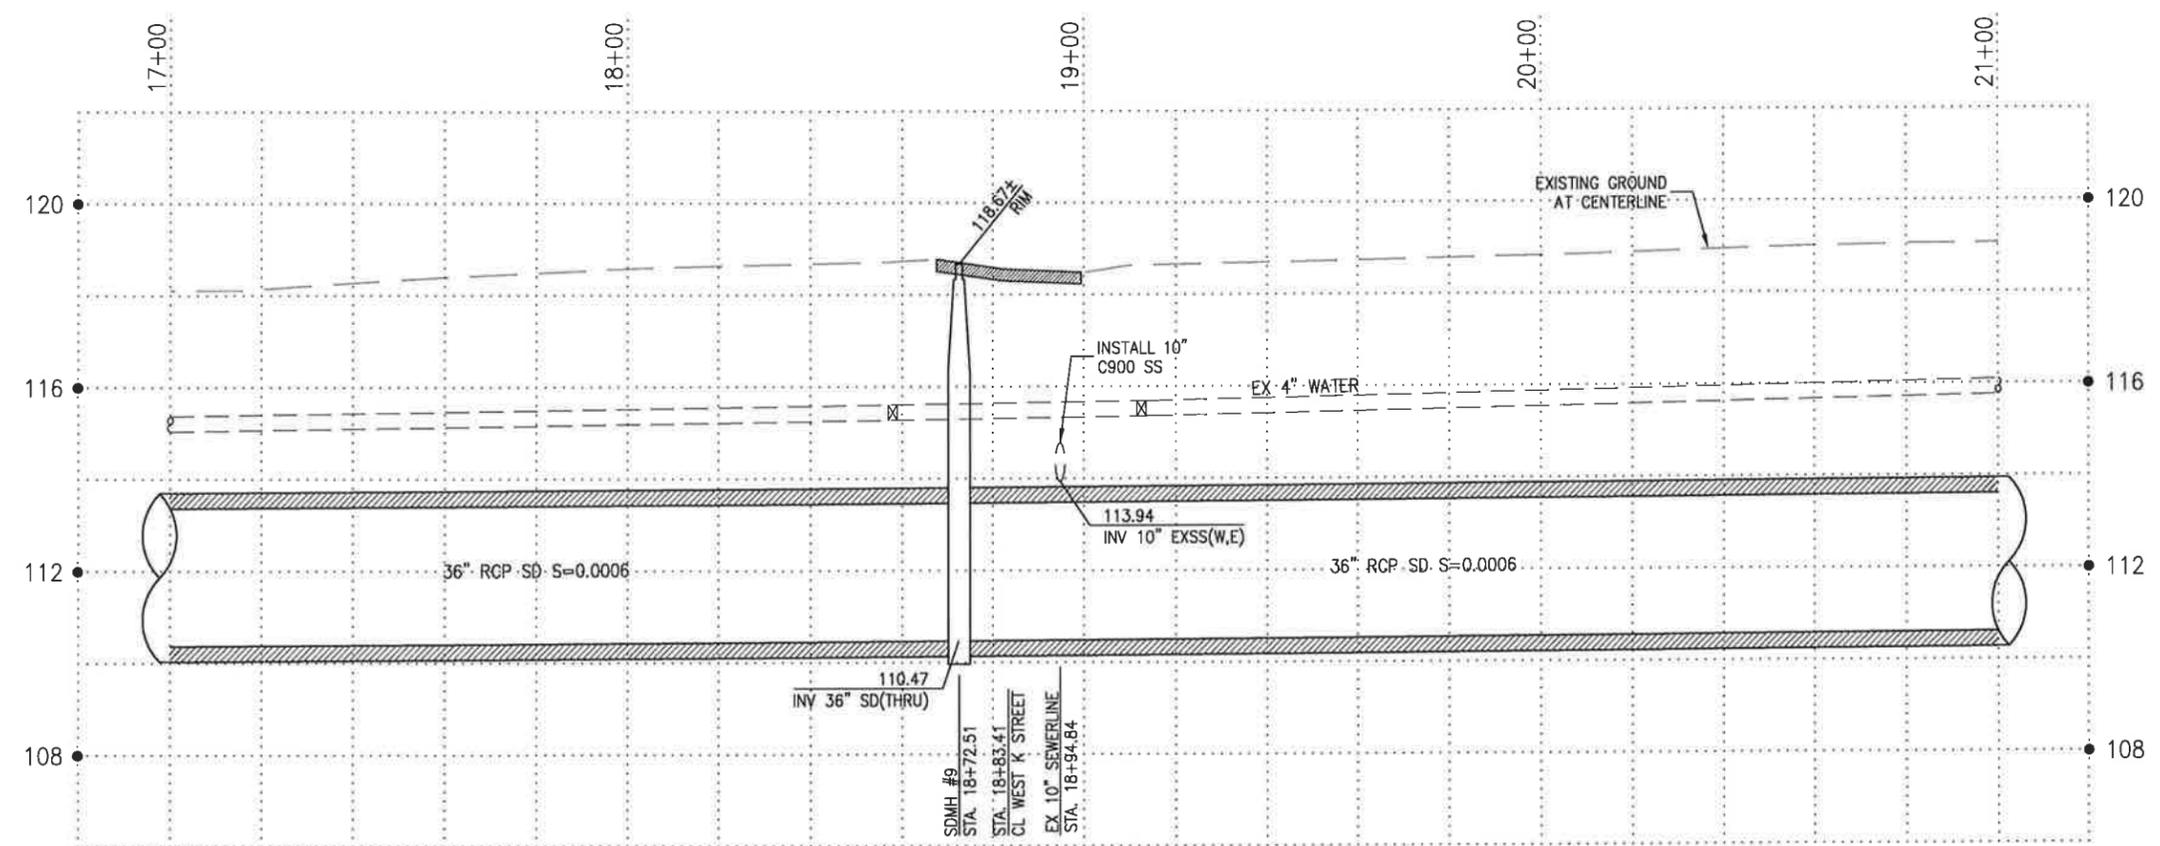

Apr 08, 2015 - 2:08pm
V:\13104022\cas\goumei\84002C-117.dwg

REV	DATE	DESCRIPTION	APPR

OWNERSHIP OF DOCUMENTS
 THIS DOCUMENT, AND THE CONCEPTS AND DESIGNS PRESENTED HEREIN, AS AN INSTRUMENT OF SERVICE, IS THE PROPERTY OF GOUVEIA ENGINEERING, INC., AND IS INTENDED ONLY FOR THE SPECIFIC PURPOSE AND CLIENT FOR WHICH IT WAS PREPARED. REUSE, IN WHOLE OR IN PART, IS NOT PERMITTED WITHOUT WRITTEN AUTHORIZATION BY GOUVEIA ENGINEERING, INC.

GOUVEIA ENGINEERING, INC.
 CONSULTING ENGINEERS
 456 Sixth Street • Gustine, California 95322
 Telephone (209) 854-3300 • Fax (209) 854-3600

CITY OF LOS BANOS
HENRY MILLER AREA STORM DRAIN AND L STREET WATERLINE
IDAHO AVENUE
IMPROVEMENTS STA. 17+00 TO 21+00


DESIGNED BY	DATE	DRAWING
NWF, DGR	03/27/2015	C-119
DRAWN BY	DATE	SHEET
NWF, AMT, DGR	04/02/2015	19
CHECKED BY	DATE	OF 27 SHEETS
M. GOUVEIA	04/02/2015	PROJECT NUMBER
APPROVED	DATE	835.02, 840.02
M. GOUVEIA	04/03/2015	

D

C

B



A

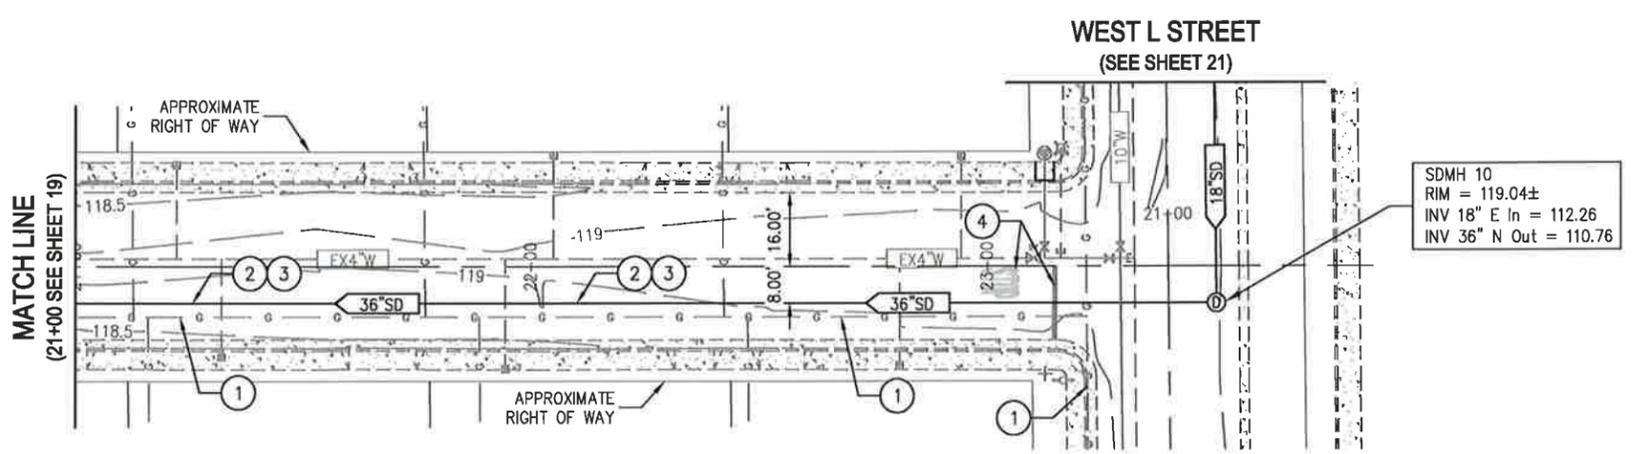

CONSTRUCTION NOTES		REFERENCE DETAIL
UNDERGROUND IMPROVEMENTS		
①	LOCATE AND PROTECT EXISTING GAS LINE IN PLACE.	1/22
②	INSTALL 36" RCP STORM DRAIN PIPE.	1/22
SURFACE IMPROVEMENTS		
③	REMOVE AND REPLACE EXISTING AC WITHIN TRENCH AREA. TRENCH AREA EDGES ARE TO BE SAWCUT. AC MAY BE PULVERIZED AND REUSED AS BASE BELOW AB.	1/22
④	REMOVE AND REAPPLY "STOP" MARKING AND STOP BAR.	

ESTIMATED QUANTITIES	
INSTALL 36" STORM DRAIN PIPE	250 LF
THERMOPLASTIC MARKINGS	38 SF

IDAHO AVENUE
STATION 21+00 - 23+80

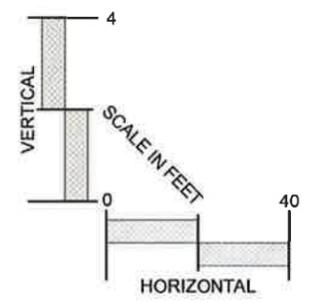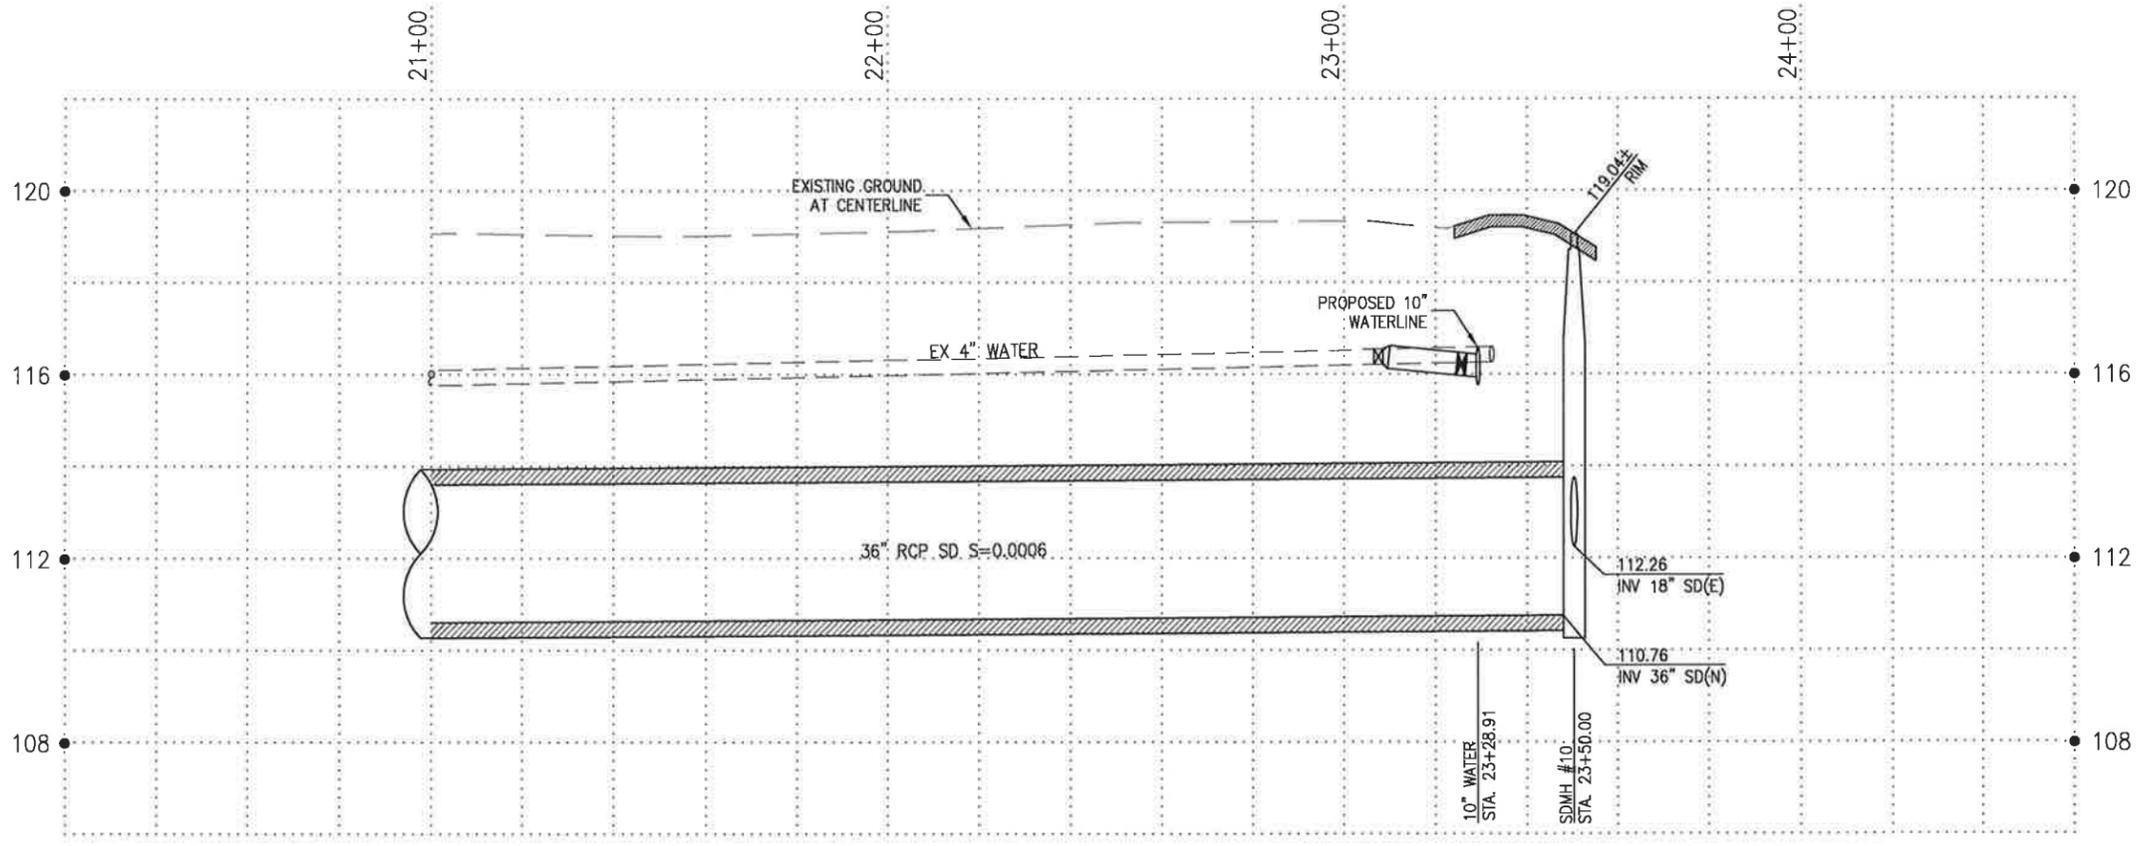

Apr 03, 2015 - 2:10pm
V:\C\B\14707\14707.dwg


REV	DATE	DESCRIPTION	APPR
1			
2			

OWNERSHIP OF DOCUMENTS
THIS DOCUMENT, AND THE CONCEPTS AND DESIGNS PRESENTED HEREIN, AS AN INSTRUMENT OF SERVICE, IS THE PROPERTY OF GOUVEIA ENGINEERING, INC., AND IS INTENDED ONLY FOR THE SPECIFIC PURPOSE AND CLIENT FOR WHICH IT WAS PREPARED. REUSE, IN WHOLE OR IN PART, IS NOT PERMITTED WITHOUT WRITTEN AUTHORIZATION BY GOUVEIA ENGINEERING, INC.

GOUVEIA ENGINEERING, INC.
CONSULTING ENGINEERS
456 Sixth Street • Gustine, California 95322
Telephone (209) 854-3300 • Fax (209) 854-3600




CITY OF LOS BANOS
HENRY MILLER AREA STORM DRAIN AND L STREET WATERLINE
IDAHO AVENUE
IMPROVEMENTS STA. 21+00 TO 23+80

DESIGNED BY NWF, DGR	DATE 03/27/2015	DRAWING C-120
DRAWN BY NWF, AMT, DGR	DATE 04/02/2015	SHEET 20
CHECKED BY M. GOUVEIA	DATE 04/02/2015	OF 27 SHEETS
APPROVED M. GOUVEIA	DATE 04/03/2015	PROJECT NUMBER 835.02, 840.02

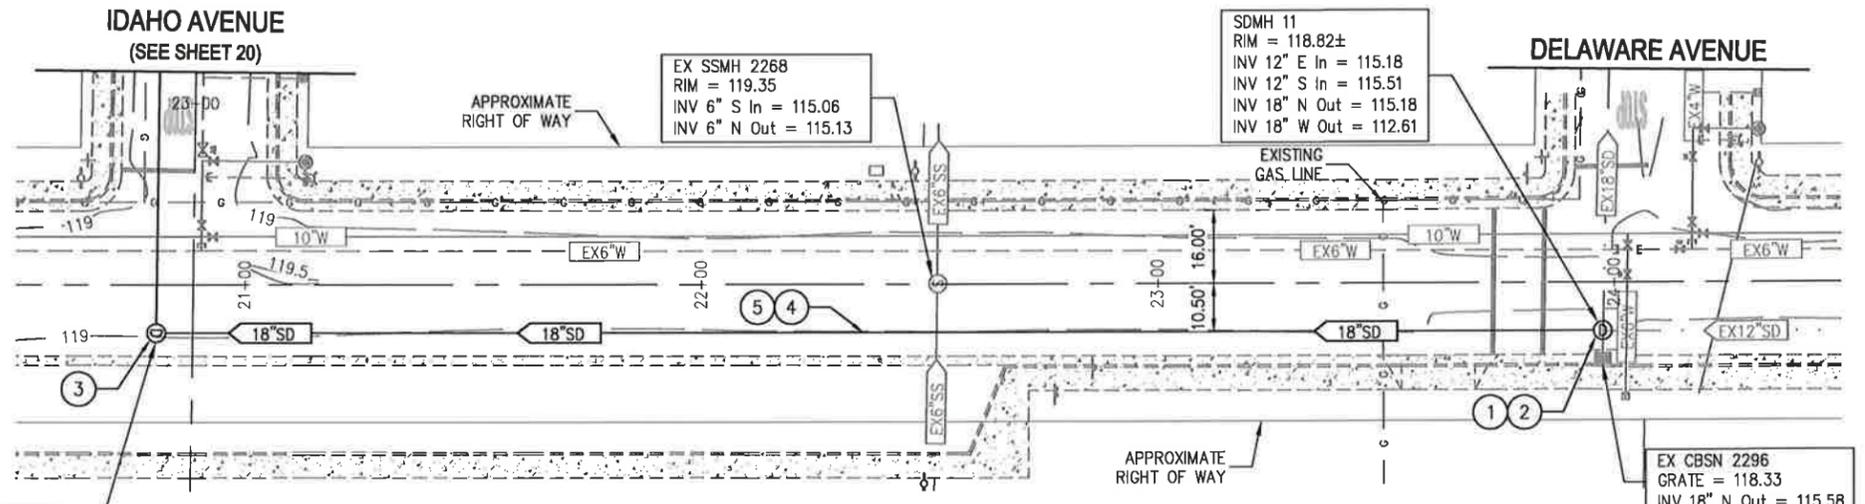

SDMH 10
RIM = 119.04±
INV 18" E In = 112.26
INV 36" N Out = 110.76

WEST L STREET
STATION 21+60 - 24+40

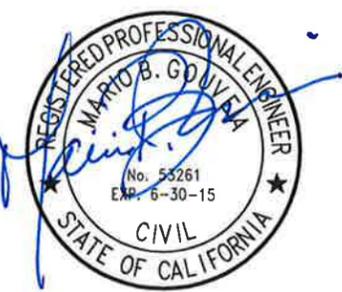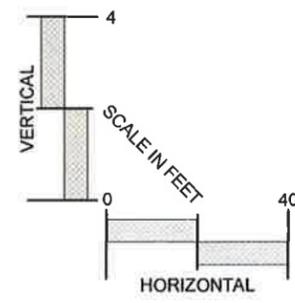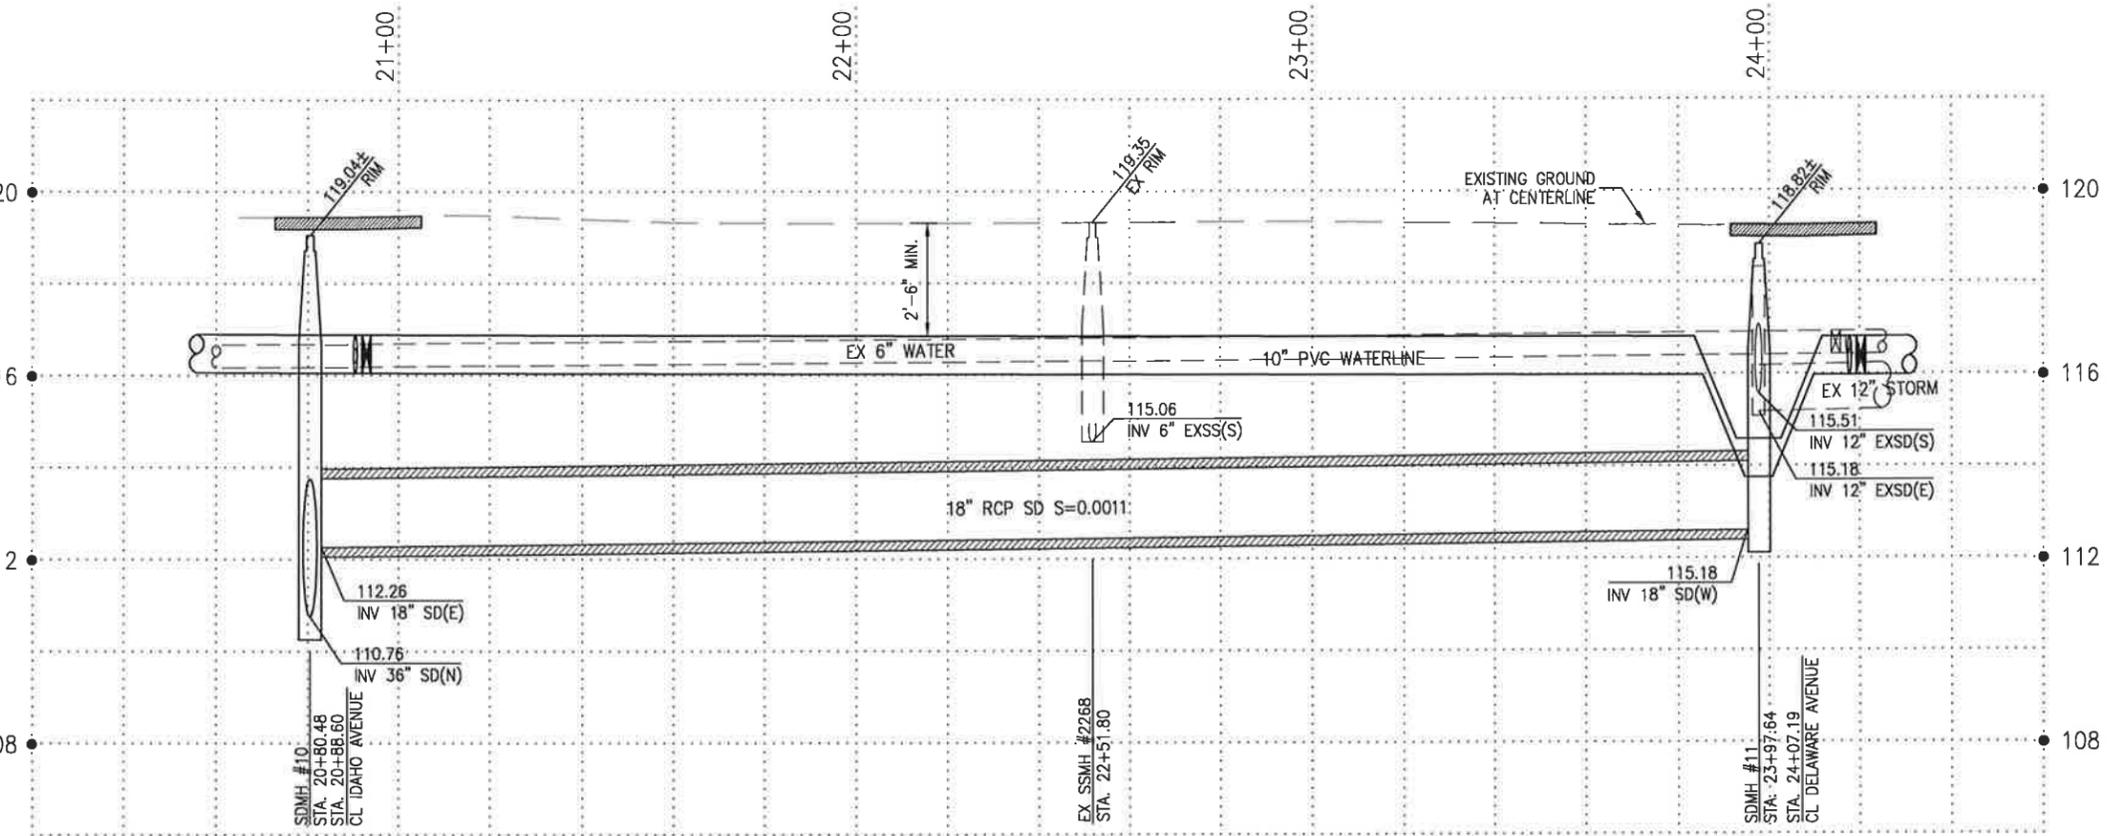

CONSTRUCTION NOTES		REFERENCE DETAIL
UNDERGROUND IMPROVEMENTS		
①	CONNECT EXISTING FACILITIES.	③ 24
②	CONSTRUCT STANDARD STORM DRAIN MANHOLE.	② 24
③	CONSTRUCT STORM DRAIN MANHOLE FOR 36" PIPE.	① 22
④	INSTALL 18" RCP STORM DRAIN PIPE.	
SURFACE IMPROVEMENTS		
⑤	REMOVE AND REPLACE EXISTING AC WITHIN TRENCH AREA. TRENCH AREA EDGES ARE TO BE SAWCUT. AC MAY BE PULVERIZED AND REUSED AS BASE BELOW AB.	① 22

ESTIMATED QUANTITIES	
INSTALL 18" RCP STORM DRAIN PIPE	320 LF
CONSTRUCT MANHOLE	2 EA

Apr 03, 2015 - 2:11pm
V:\CADD\2015\20150402\117.dwg



REV	DATE	DESCRIPTION	APPR

OWNERSHIP OF DOCUMENTS
THIS DOCUMENT, AND THE CONCEPTS AND DESIGNS PRESENTED HEREIN, AS AN INSTRUMENT OF SERVICE, IS THE PROPERTY OF GOUVEIA ENGINEERING, INC., AND IS INTENDED ONLY FOR THE SPECIFIC PURPOSE AND CLIENT FOR WHICH IT WAS PREPARED. REUSE, IN WHOLE OR IN PART, IS NOT PERMITTED WITHOUT WRITTEN AUTHORIZATION BY GOUVEIA ENGINEERING, INC.


GOUVEIA ENGINEERING, INC.
CONSULTING ENGINEERS
456 Sixth Street • Gustine, California 95322
Telephone (209) 854-3300 • Fax (209) 854-3600

CITY OF LOS BANOS
HENRY MILLER AREA STORM DRAIN AND L STREET WATERLINE
WEST L STREET
IMPROVEMENTS STA. 21+60 to 24+40

DESIGNED BY NWF, DGR	DATE 03/27/2015	DRAWING C-121
DRAWN BY NWF, AMT, DGR	DATE 04/02/2015	SHEET 21
CHECKED BY M. GOUVEIA	DATE 04/02/2015	OF 27 SHEETS
APPROVED M. GOUVEIA	DATE 04/03/2015	PROJECT NUMBER 835.02, 840.02

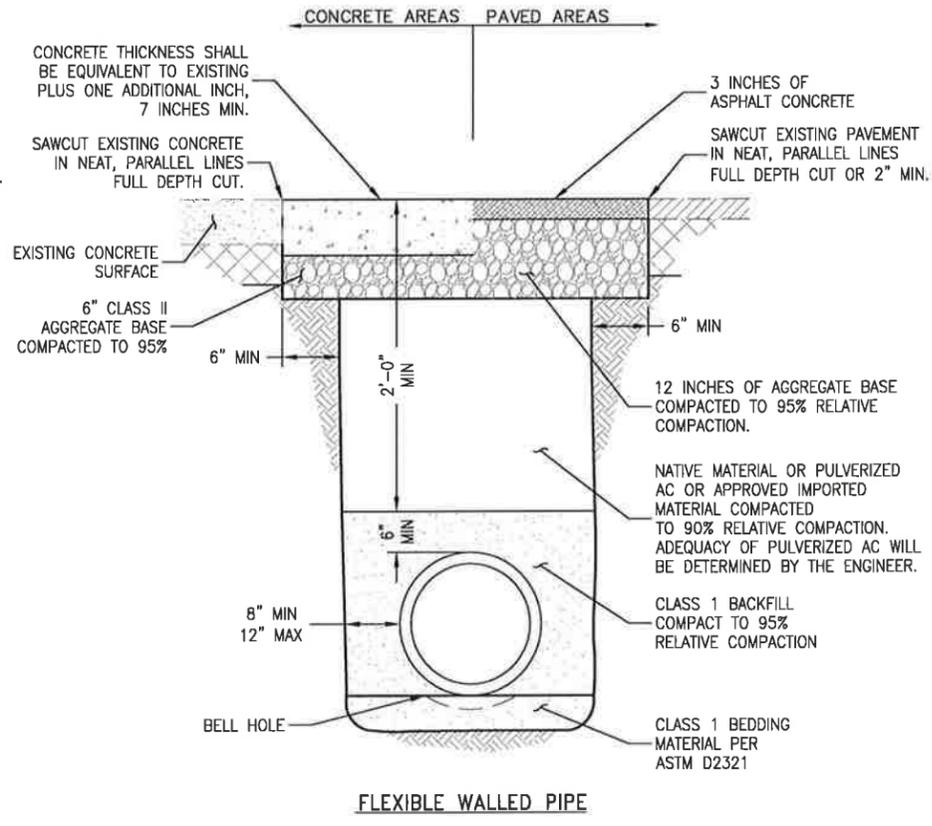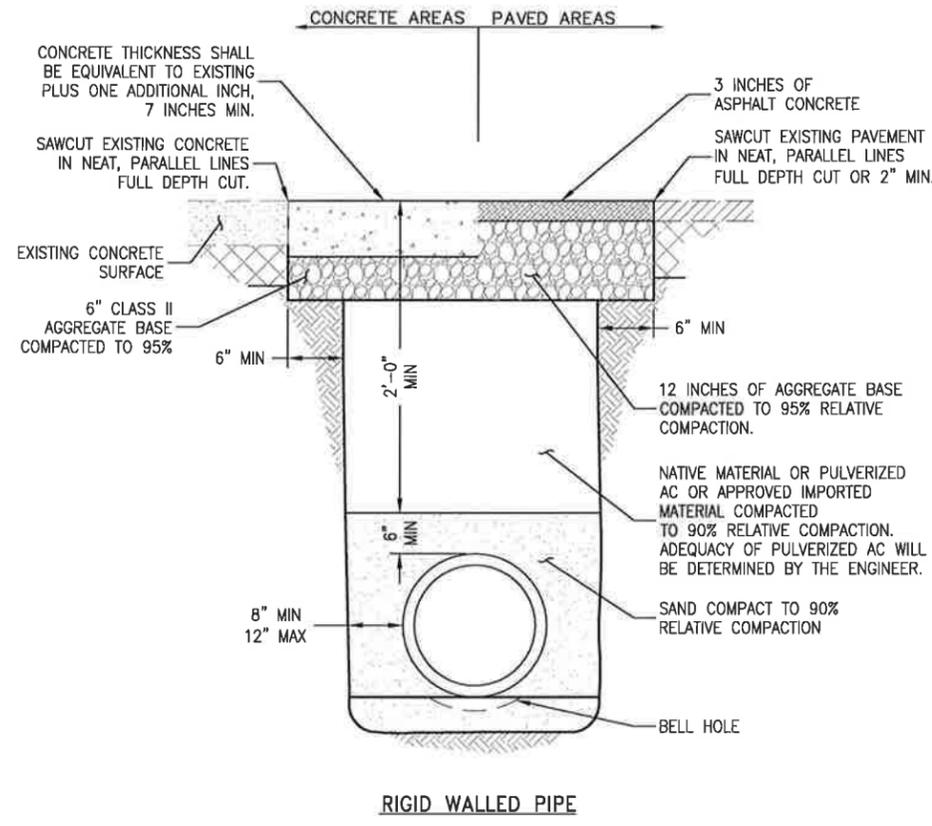

1 TRENCH BACKFILL
NOT TO SCALE

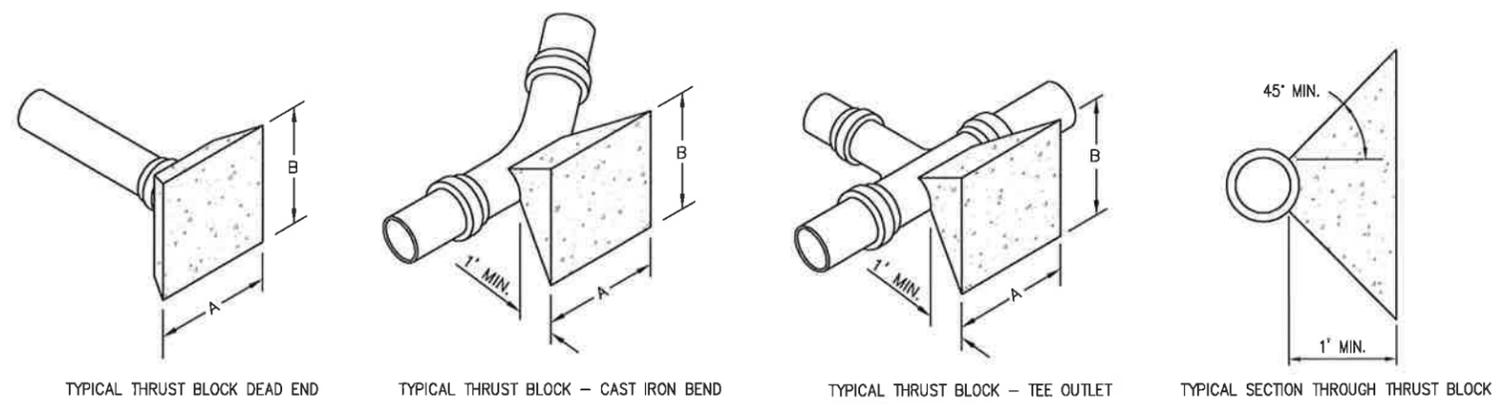

2 THRUST BLOCKS
NOT TO SCALE

FITTINGS	THRUST BLOCK AREA REQUIRED	
	ALLOWABLE SOIL BEARING VALUE 1,500 LBS. PER SQ. FT.	
6" LINE	"A"	"B"
22-1/2'	1'-6"	1'-0"
45'	2'-0"	1'-3"
90'	3'-0"	1'-6"
TEE OUTLET	2'-0"	1'-6"
DEAD END	2'-0"	1'-6"
8" LINE	"A"	"B"
22-1/2'	1'-6"	1'-6"
45'	2'-6"	1'-6"
90'	4'-0"	2'-0"
TEE OUTLET	2'-9"	2'-0"
DEAD END	2'-9"	2'-0"
10" LINE	"A"	"B"
22-1/2'	2'-3"	1'-6"
45'	3'-0"	2'-0"
90'	5'-0"	2'-6"
TEE OUTLET	3'-3"	2'-6"
DEAD END	3'-3"	2'-6"

DETAIL NOTES

- TRENCHING, PIPE BEDDING, AND BACKFILL**
- TRENCH WALL SHOWN VERTICAL FOR CLARITY, EXCAVATE PER OSHA SAFETY REQUIREMENTS.
 - SAND SHALL CONFORM TO THE FOLLOWING GRADING REQUIREMENTS

SIEVE SIZE	PERCENTAGE PASSING
#4	100
#16	0-70
#30	0-15
#200	0-5
 - FOR PVC PRESSURE PIPE PROVIDE 4" OF MANUFACTURED SAND BEDDING.
 - IF THE BOTTOM OF THE TRENCH IS SOFT OR UNSTABLE, IT SHALL BE OVER EXCAVATED A MINIMUM OF 1 FOOT BELOW GRADE AND BACKFILLED WITH APPROVED IMPORTED MATERIAL.
 - RELATIVE COMPACTION IS EXPRESSED AS A PERCENTAGE OF MAXIMUM DRY DENSITY IN ACCORDANCE WITH ASTM D1557.
 - FOR PIPE BEDDING AND BACKFILL PURPOSES, AWWA C900 PIPE SHALL BE CONSIDERED RIGID WALLED.
 - UNDER AWWA C900 PIPE, PROVIDE 4" OF MANUFACTURED SAND BEDDING MATERIAL.
 - TRENCHES NOT IN PAVED AREA SHALL BE RESTORED TO MATCH EXISTING SURFACE CONDITIONS.
 - EXISTING ROADWAY PAVEMENT SECTIONS HAVE NOT BEEN INVESTIGATED ALONG THE PIPE LINE ALIGNMENT(S).
- THRUST BLOCKS**
- ALL VALUES SHOWN ARE MINIMUM FOR A HYDROSTATIC PRESSURE OF 150 P.S.I. AND SOIL RESISTANCE OF 1,500 LBS./SQ. FT. WITH A MINIMUM PIPELINE COVER OF 2'-6".
 - REDUCTION OF THE THRUST BLOCK SURFACE AREA WILL BE CONSIDERED UPON SUBMITTAL OF APPROVED SOIL BEARING TEST RESULTS GREATER THAN 1,500 LBS./SQ. FT.
 - ALL THRUST BLOCKS SHALL BE POURED AGAINST UNDISTURBED SOIL.
 - THRUST BLOCKS SHOWN ARE FOR HORIZONTAL THRUST RESTRAINT. FOR VERTICAL THRUST RESTRAINT, DETAILS SHALL BE PROVIDED BY THE DESIGN ENGINEER.



Apr 03, 2015 - 2:12pm
V:\C:\B9\09\2015\04\03\01\002C-122.dwg


REV	DATE	DESCRIPTION	APPR
1			
2			

OWNERSHIP OF DOCUMENTS
THIS DOCUMENT, AND THE CONCEPTS AND DESIGNS PRESENTED HEREIN, AS AN INSTRUMENT OF SERVICE, IS THE PROPERTY OF GOUVEIA ENGINEERING, INC., AND IS INTENDED ONLY FOR THE SPECIFIC PURPOSE AND CLIENT FOR WHICH IT WAS PREPARED. REUSE, IN WHOLE OR IN PART, IS NOT PERMITTED WITHOUT WRITTEN AUTHORIZATION BY GOUVEIA ENGINEERING, INC.


GOUVEIA ENGINEERING, INC.
CONSULTING ENGINEERS
456 Sixth Street • Gustine, California 95322
Telephone (209) 854-3300 • Fax (209) 854-3600

CITY OF LOS BANOS
HENRY MILLER AREA STORM DRAIN AND L STREET WATERLINE
TRENCH BACKFILL AND THRUST BLOCK DETAILS

DESIGNED BY NWF, DGR	DATE 03/27/2015	DRAWING C-122
DRAWN BY NWF, AMT, DGR	DATE 04/02/2015	SHEET 22
CHECKED BY M. GOUVEIA	DATE 04/02/2015	OF 27 SHEETS
APPROVED M. GOUVEIA	DATE 04/03/2015	PROJECT NUMBER 835.02, 840.02

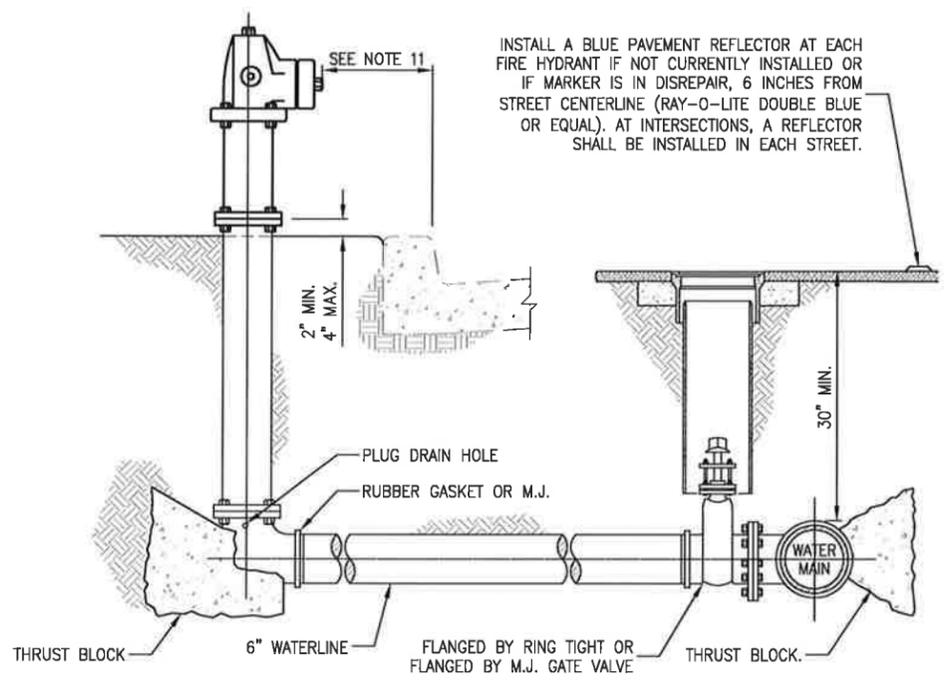

NEW FIRE HYDRANT ASSEMBLY

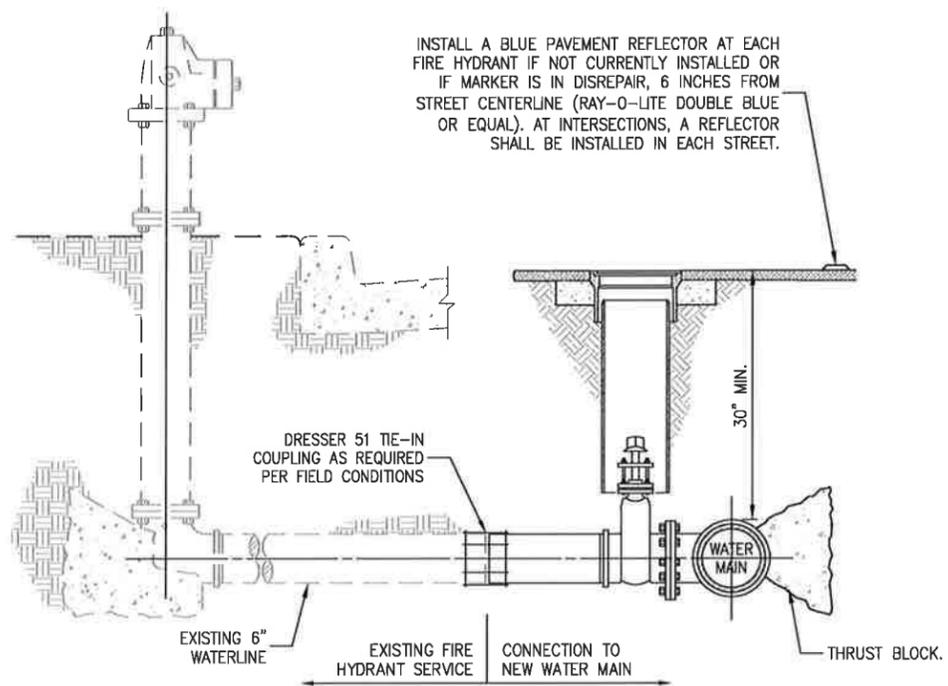


EXISTING FIRE HYDRANT TRANSFER


DETAIL NOTES

- FIRE HYDRANTS**
1. WRAP THE FIRE HYDRANT AND WATER MAIN FITTINGS WITH 6-MIL PLASTIC PRIOR TO POURING THRUST BLOCKS.
 2. FIRE HYDRANTS SHALL BE AVK 2700.
 3. HYDRANT SHALL BE INSTALLED SUCH THAT THE NOZZLE CAP IS 6" BEHIND THE BACK OF THE SIDEWALK. IF FIRE HYDRANTS ARE INSTALLED WITHIN PARKWAY THE NOZZLE CAP SHALL BE 12" BEHIND THE BACK OF CURB.
 4. HYDRANT SHALL BE FACTORY PAINTED WITH A SILVER ENAMEL FINISH COAT.
- VALVES**
5. SAME INSTALLATION APPLIES TO BUTTERFLY VALVES.
 6. IF VALVE OPERATING NUT IS INSTALLED DEEPER THAT 2'-6", ATTACH PERMANENT EXTENSION AS APPROVED BY PUBLIC WORKS DIRECTOR.
- WATER SERVICE CONNECTIONS**
7. SERVICE TUBING SHALL BE 1" CLASS 160 POLYETHYLENE (PE3406, SDR7, PR160 PSI, CTS). NO JOINTS OR SPLICES ARE PERMITTED BETWEEN THE CORPORATION STOP AND THE METER VALVE.

1 FIRE HYDRANT DETAILS
NOT TO SCALE

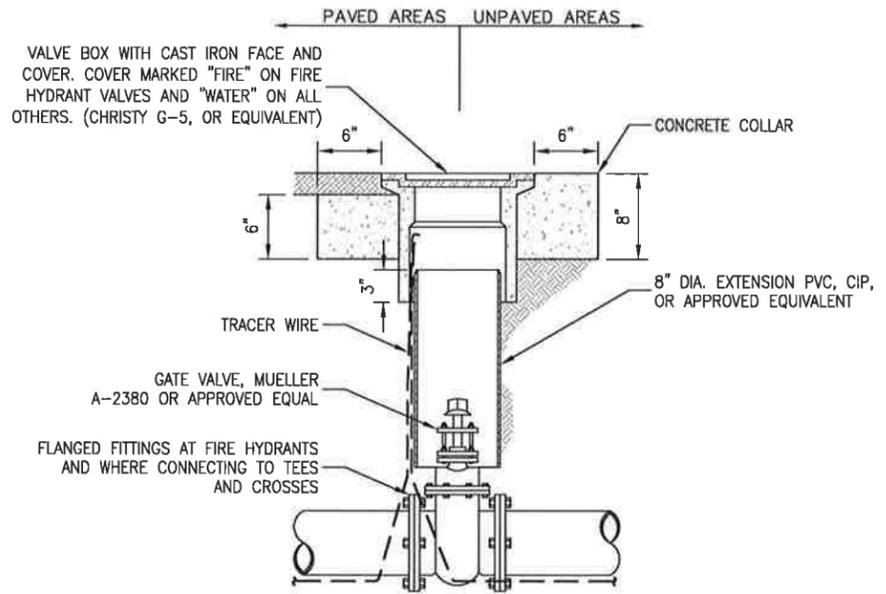

2 VALVE BOX INSTALLATION
NOT TO SCALE

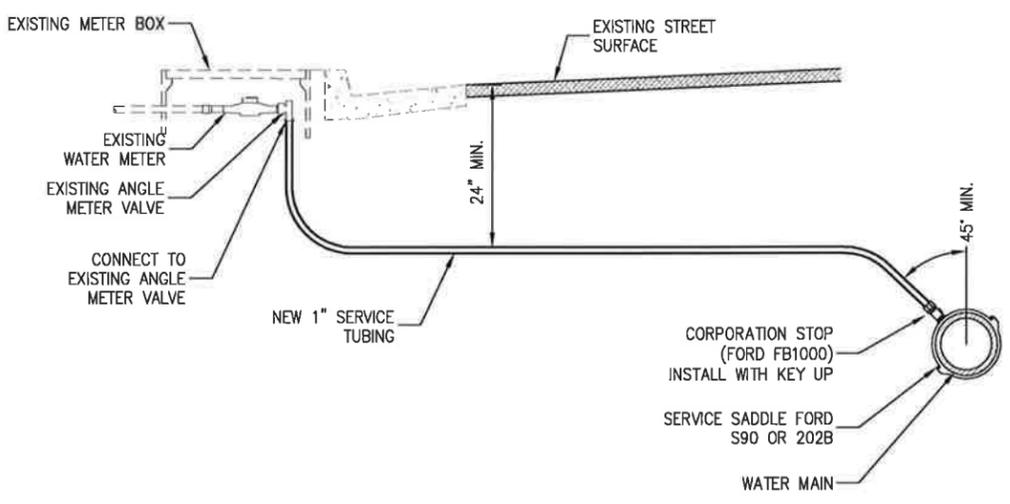

3 RESIDENTIAL WATER SERVICE CONNECTION
NOT TO SCALE



Apr 03, 2015 - 2:12pm
V:\CADD\0222\cadd\gouvie\040222-122.dwg


REV	DATE	DESCRIPTION	APPR

OWNERSHIP OF DOCUMENTS
THIS DOCUMENT, AND THE CONCEPTS AND DESIGNS PRESENTED HEREIN, AS AN INSTRUMENT OF SERVICE, IS THE PROPERTY OF GOUVEIA ENGINEERING, INC., AND IS INTENDED ONLY FOR THE SPECIFIC PURPOSE AND CLIENT FOR WHICH IT WAS PREPARED. REUSE, IN WHOLE OR IN PART, IS NOT PERMITTED WITHOUT WRITTEN AUTHORIZATION BY GOUVEIA ENGINEERING, INC.


GOUVEIA ENGINEERING, INC.
CONSULTING ENGINEERS
456 Sixth Street • Gustine, California 95322
Telephone (209) 854-3300 • Fax (209) 854-3600

CITY OF LOS BANOS
HENRY MILLER AREA STORM DRAIN AND L STREET WATERLINE
WATER DETAILS


DESIGNED BY NWF, DGR	DATE 03/27/2015	DRAWING C-123
DRAWN BY NWF, AMT, DGR	DATE 04/02/2015	SHEET 23
CHECKED BY M. GOUVEIA	DATE 04/02/2015	OF 27 SHEETS
APPROVED M. GOUVEIA	DATE 04/03/2015	PROJECT NUMBER 835.02, 840.02

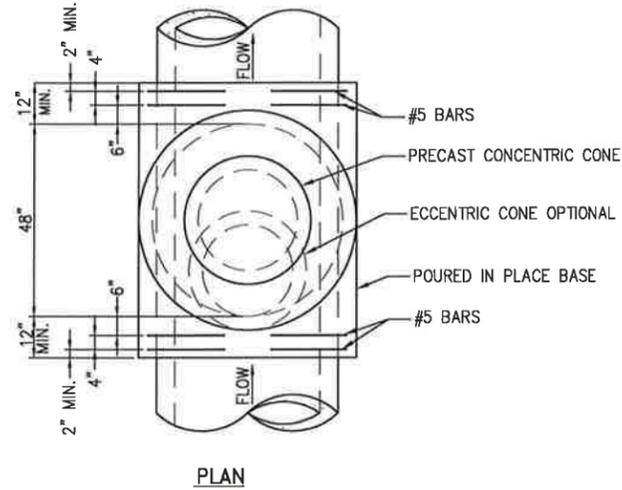


PLAN

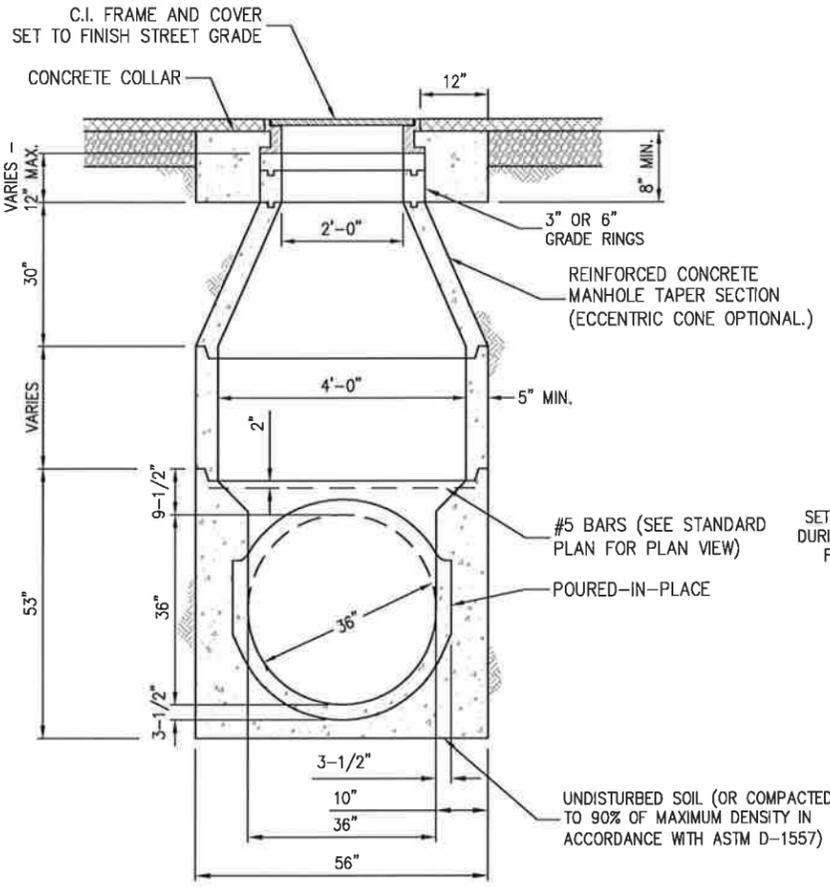


1 36" STORM DRAIN MANHOLE
NOT TO SCALE

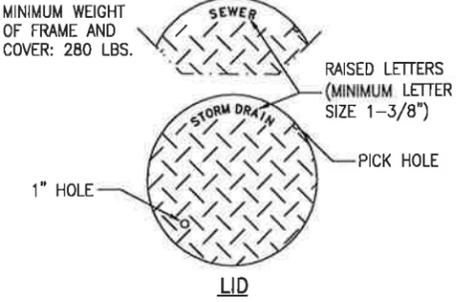


LID



PLAN

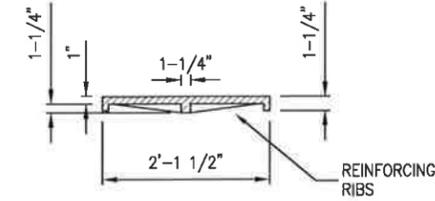


SECTION

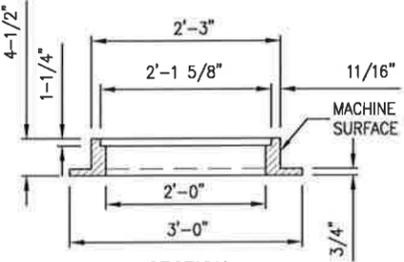


SECTION


2 MANHOLE FRAME AND COVER
NOT TO SCALE

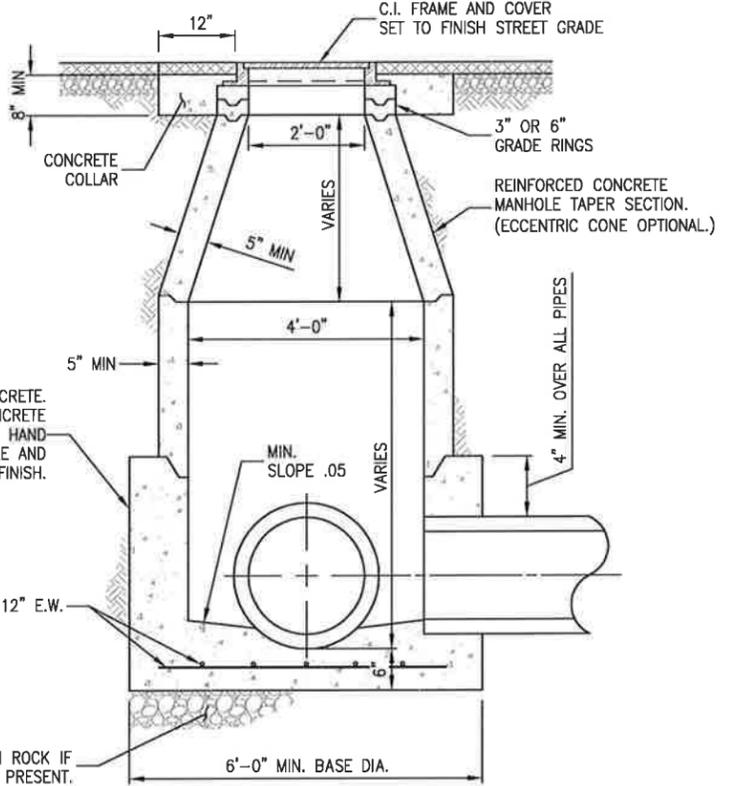

3 STORM DRAIN MANHOLE
NOT TO SCALE

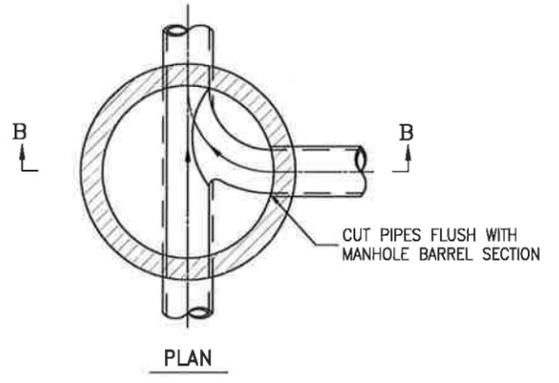

PLAN

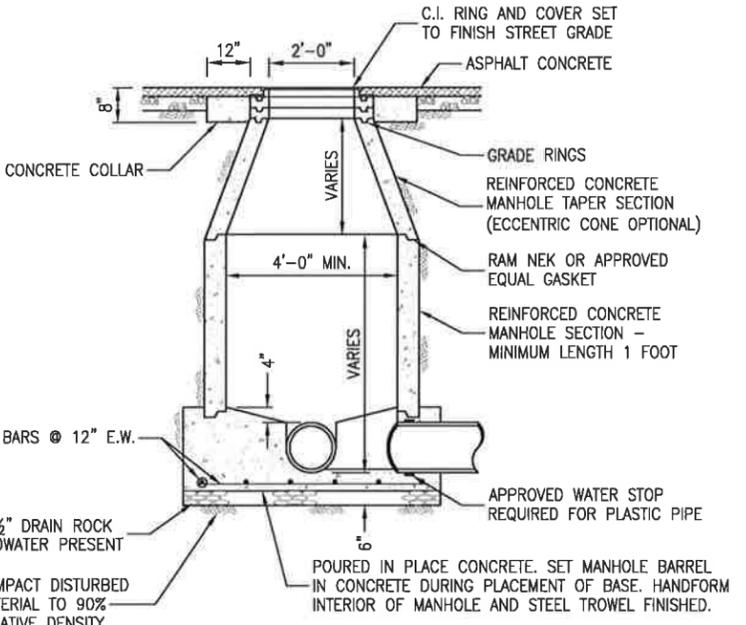

SECTION "B-B"

4 SEWER MANHOLE
NOT TO SCALE



Apr 03, 2015 - 2:12pm V:\CL\B9469\2\cad\plan\04002C-122.dwg

REV	DATE	DESCRIPTION	APPR



OWNERSHIP OF DOCUMENTS
THIS DOCUMENT, AND THE CONCEPTS AND DESIGNS PRESENTED HEREIN, AS AN INSTRUMENT OF SERVICE, IS THE PROPERTY OF GOUVEIA ENGINEERING, INC., AND IS INTENDED ONLY FOR THE SPECIFIC PURPOSE AND CLIENT FOR WHICH IT WAS PREPARED. REUSE, IN WHOLE OR IN PART, IS NOT PERMITTED WITHOUT WRITTEN AUTHORIZATION BY GOUVEIA ENGINEERING, INC.

GOUVEIA ENGINEERING, INC.
CONSULTING ENGINEERS
456 Sixth Street • Gustine, California 95322
Telephone (209) 854-3300 • Fax (209) 854-3600

CITY OF LOS BANOS
HENRY MILLER AREA STORM DRAIN AND L STREET WATERLINE
MANHOLES, FRAME AND COVER DETAILS


DESIGNED BY	DATE	DRAWING
NWF, DGR	03/27/2015	C-124
DRAWN BY	DATE	SHEET
NWF, AMT, DGR	04/02/2015	24
CHECKED BY	DATE	OF 27 SHEETS
M. GOUVEIA	04/02/2015	PROJECT NUMBER
APPROVED	DATE	835.02, 840.02
M. GOUVEIA	04/03/2015	

CASTING FRAME AND COVER
 6" SOUTH BAY FOUNDRY NO. SBF 1248 OR EQUAL.
 8" SOUTH BAY FOUNDRY NO. SBF 1247 OR EQUAL.

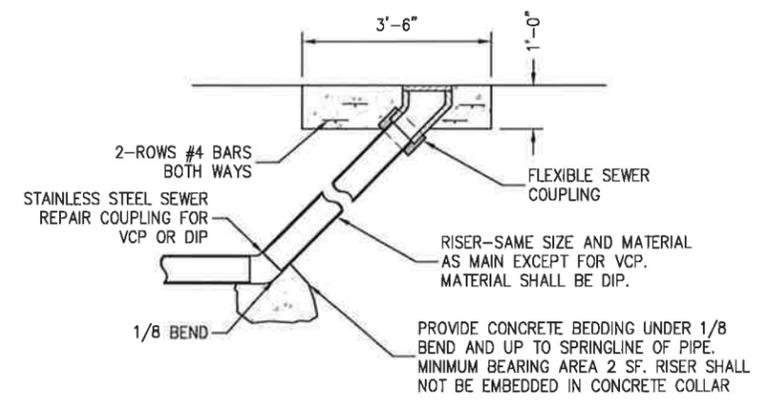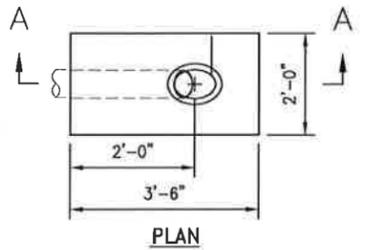


SECTION "A-A"


1 SEWER CLEANOUT
 NOT TO SCALE

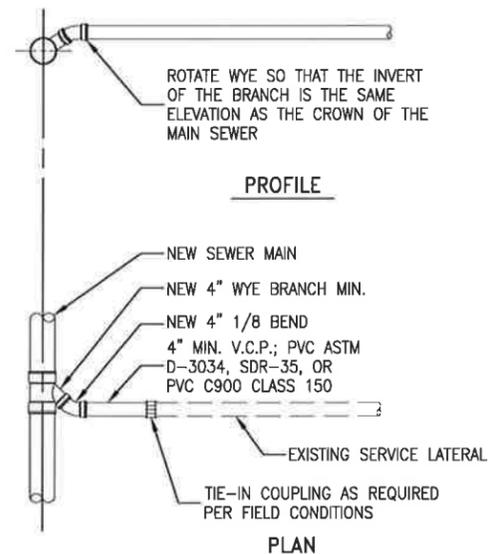


2 4-INCH SEWER SERVICE
 NOT TO SCALE

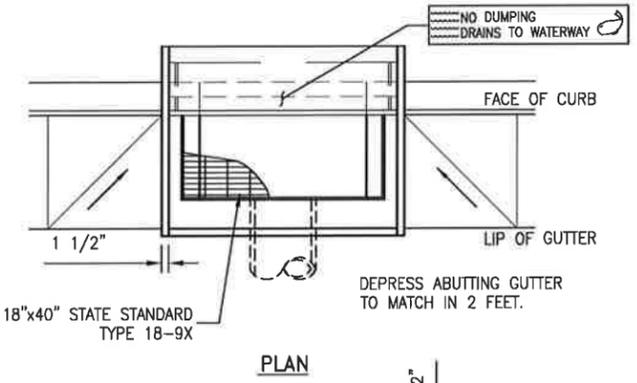

PLAN

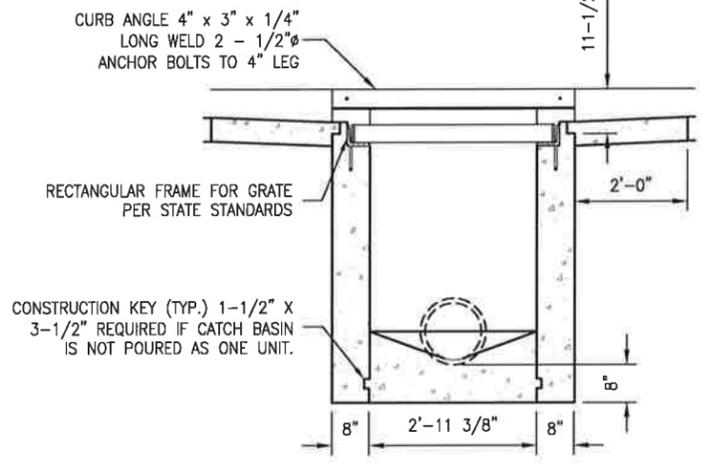

FRONT SECTION

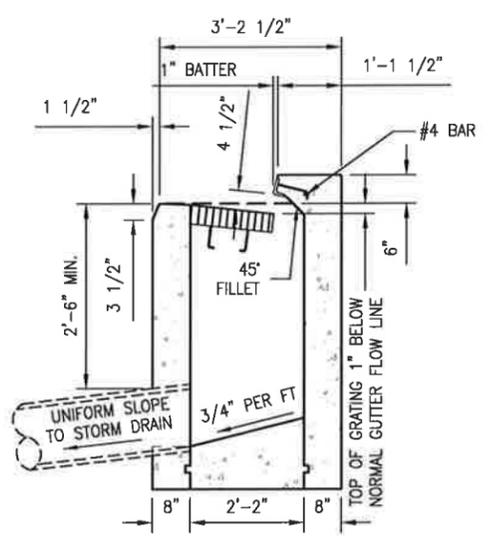

SIDE SECTION

3 TYPE 'A' CATCH BASIN
 NOT TO SCALE

DETAIL NOTES

SANITARY SEWER

1. LATERAL SHALL HAVE SAME BEDDING AND BACKFILL AS SEWER MAIN. TRENCH WIDTH FOR 4" OR SMALLER SHALL BE SUFFICIENT TO ALLOW MECHANICAL COMPACTION OF BACKFILL AROUND CONDUIT.
2. SEWER SERVICE SHALL HAVE A MINIMUM 2 FEET OF COVER AND 1/4 INCH PER FOOT (MIN.) SLOPE.
3. WHEN THE LATERAL SEWER DEPTH IS SUCH THAT 2 FEET COVER CANNOT BE MET, THE LATERAL MUST BE ENCASED IN CONCRETE IN THE TRAVEL RIGHT OF WAY PVC PIPE MEETING THE REQUIREMENTS OF AWWA C900 CLASS 150 MUST BE USED.

CATCH BASIN

4. ALL METAL SHALL BE HOT DIP GALVANIZED AFTER FABRICATION.
5. WALL AND FLOOR REINFORCING NOT REQUIRED IF INVERT IS LESS THAN 8' DEEP, OTHERWISE USE NO. 4 BARS AT 12" EACH WAY, CENTERED IN WALLS.
6. PREFORMED THERMOPLASTIC STORMDRAIN MARKING BY PREMARK. (5" X 29" WHITE BACKGROUND WITH BLUE LETTERING.) INSTALL ON TOP OF CURB AND CENTERED ON CATCH BASIN.



Call before you dig.



Apr 03, 2015 - 2:13pm V:\CADD\2015\20150402\150402C-122.dwg



REV	DATE	DESCRIPTION	APPR
1			
2			
3			
4			
5			
6			
7			
8			

OWNERSHIP OF DOCUMENTS
 THIS DOCUMENT, AND THE CONCEPTS AND DESIGNS PRESENTED HEREIN, AS AN INSTRUMENT OF SERVICE, IS THE PROPERTY OF GOUVEIA ENGINEERING, INC., AND IS INTENDED ONLY FOR THE SPECIFIC PURPOSE AND CLIENT FOR WHICH IT WAS PREPARED. REUSE, IN WHOLE OR IN PART, IS NOT PERMITTED WITHOUT WRITTEN AUTHORIZATION BY GOUVEIA ENGINEERING, INC.


GOUVEIA ENGINEERING, INC.
 CONSULTING ENGINEERS
 456 Sixth Street • Gustine, California 95322
 Telephone (209) 854-3300 • Fax (209) 854-3600

CITY OF LOS BANOS
HENRY MILLER AREA STORM DRAIN AND L STREET WATERLINE
SEWER SERVICE AND
STORM DRAIN CATCH BASIN DETAILS


DESIGNED BY NWF, DGR	DATE 03/27/2015	DRAWING C-125
DRAWN BY NWF, AMT, DGR	DATE 04/02/2015	SHEET 25
CHECKED BY M. GOUVEIA	DATE 04/02/2015	OF 27 SHEETS
APPROVED M. GOUVEIA	DATE 04/03/2015	PROJECT NUMBER 835.02, 840.02

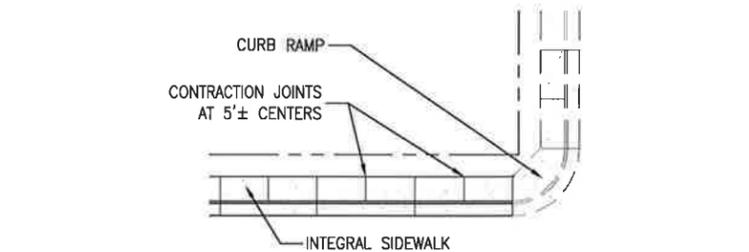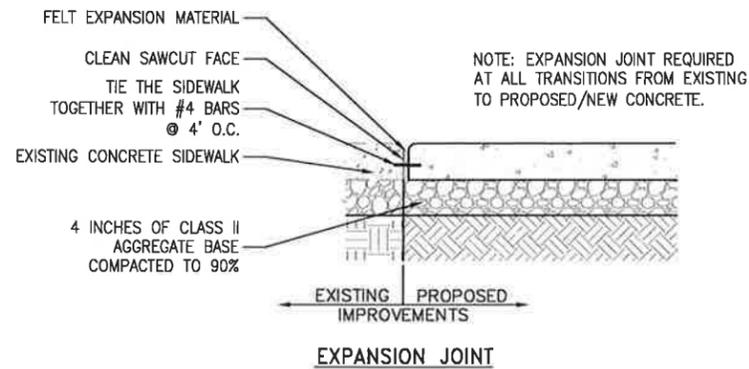


2 CURB AND GUTTER
NOT TO SCALE

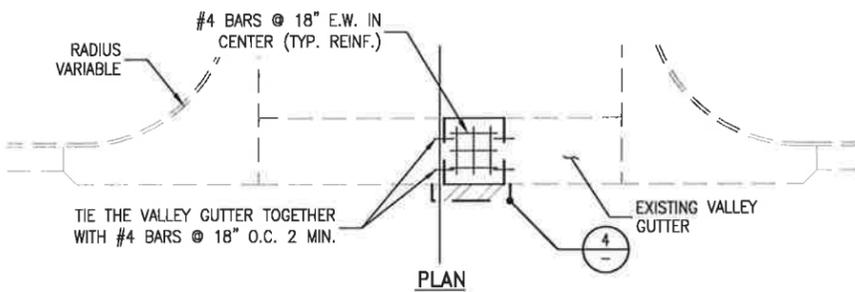

3 VALLEY GUTTER REPAIRS
NOT TO SCALE

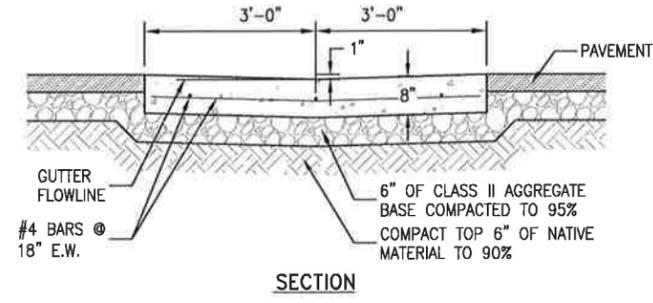


4 PAVEMENT REPAIRS
NOT TO SCALE

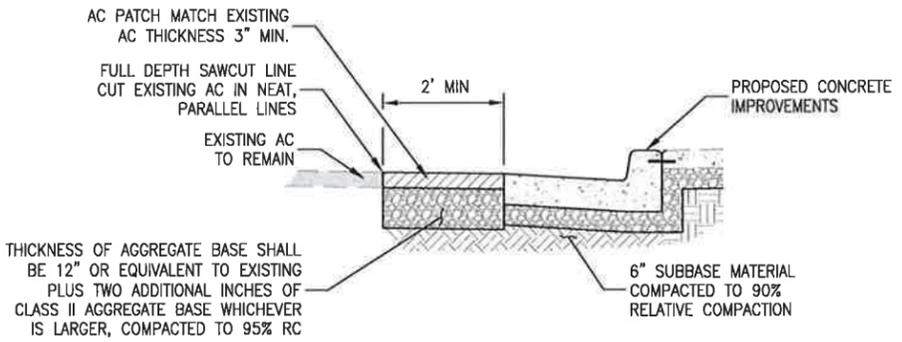


5 STREET SIGN INSTALLATION
NOT TO SCALE



- DETAIL NOTES**
1. SOIL DENSITIES ARE EXPRESSED AS A PERCENTAGE OF MAXIMUM DRY DENSITY IN ACCORDANCE WITH ASTM D 1557.
 2. WHEN REMOVING SIDEWALK, CONCRETE SHALL BE REMOVED TO THE NEAREST CONTRACTION JOINT.
 3. CITY SHALL APPROVE SUBGRADE AND AGGREGATE BASE PRIOR TO PLACEMENT OF CONCRETE.
 4. ON SIDEWALK, CURB AND GUTTER REPLACEMENT, 6 INCHES OF CLASS II AGGREGATE BASE COMPACTED TO 90% AND 95% RESPECTIVELY OVER UNDISTURBED NATIVE MATERIAL SUBBASE MAY BE USED IN LIEU OF 4 INCHES OF CLASS II AGGREGATE BASE OVER 6 INCHES OF COMPACTED NATIVE MATERIAL SUBBASE.
 5. IMMEDIATELY PRIOR TO PLACEMENT OF CONCRETE THE GEOTECHNICAL ENGINEER SHALL CERTIFY THE MOISTURE CONTENT OF THE NATIVE MATERIAL SUBBASE HAS A MOISTURE CONTENT OF NOT LESS THAN 3% ABOVE OPTIMUM TO A DEPTH OF 18 INCHES. IN ADDITION, AGGREGATE BASE SHALL HAVE A MOISTURE CONTENT AS SPECIFIED BY THE DIRECTOR.

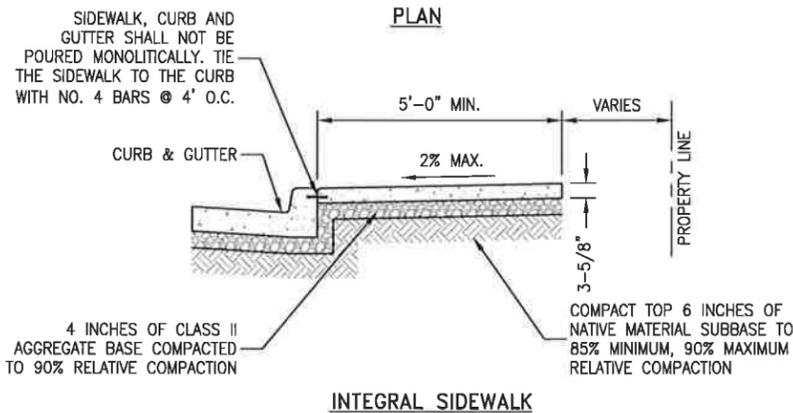

INTEGRAL SIDEWALK

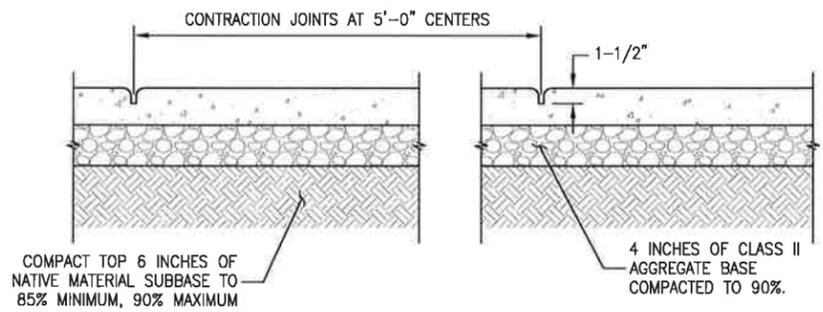

LONGITUDINAL SECTIONS

1 SIDEWALK CONSTRUCTION DETAILS
NOT TO SCALE

Apr 03, 2015 - 2:13pm V:\CADD\02\cad\gouveia\04002C-122.dwg


REV	DATE	DESCRIPTION	APPR

OWNERSHIP OF DOCUMENTS
THIS DOCUMENT, AND THE CONCEPTS AND DESIGNS PRESENTED HEREIN, AS AN INSTRUMENT OF SERVICE, IS THE PROPERTY OF GOUVEIA ENGINEERING, INC., AND IS INTENDED ONLY FOR THE SPECIFIC PURPOSE AND CLIENT FOR WHICH IT WAS PREPARED. REUSE, IN WHOLE OR IN PART, IS NOT PERMITTED WITHOUT WRITTEN AUTHORIZATION BY GOUVEIA ENGINEERING, INC.

GOUVEIA ENGINEERING, INC.
CONSULTING ENGINEERS
456 Sixth Street • Gustine, California 95322
Telephone (209) 854-3300 • Fax (209) 854-3600



CITY OF LOS BANOS
HENRY MILLER AREA STORM DRAIN AND L STREET WATERLINE
SURFACE CONSTRUCTION DETAILS

DESIGNED BY NWF, DGR	DATE 03/27/2015	DRAWING C-126
DRAWN BY NWF, AMT, DGR	DATE 04/02/2015	SHEET 26
CHECKED BY M. GOUVEIA	DATE 04/02/2015	OF 27 SHEETS
APPROVED M. GOUVEIA	DATE 04/03/2015	PROJECT NUMBER 835.02, 840.02

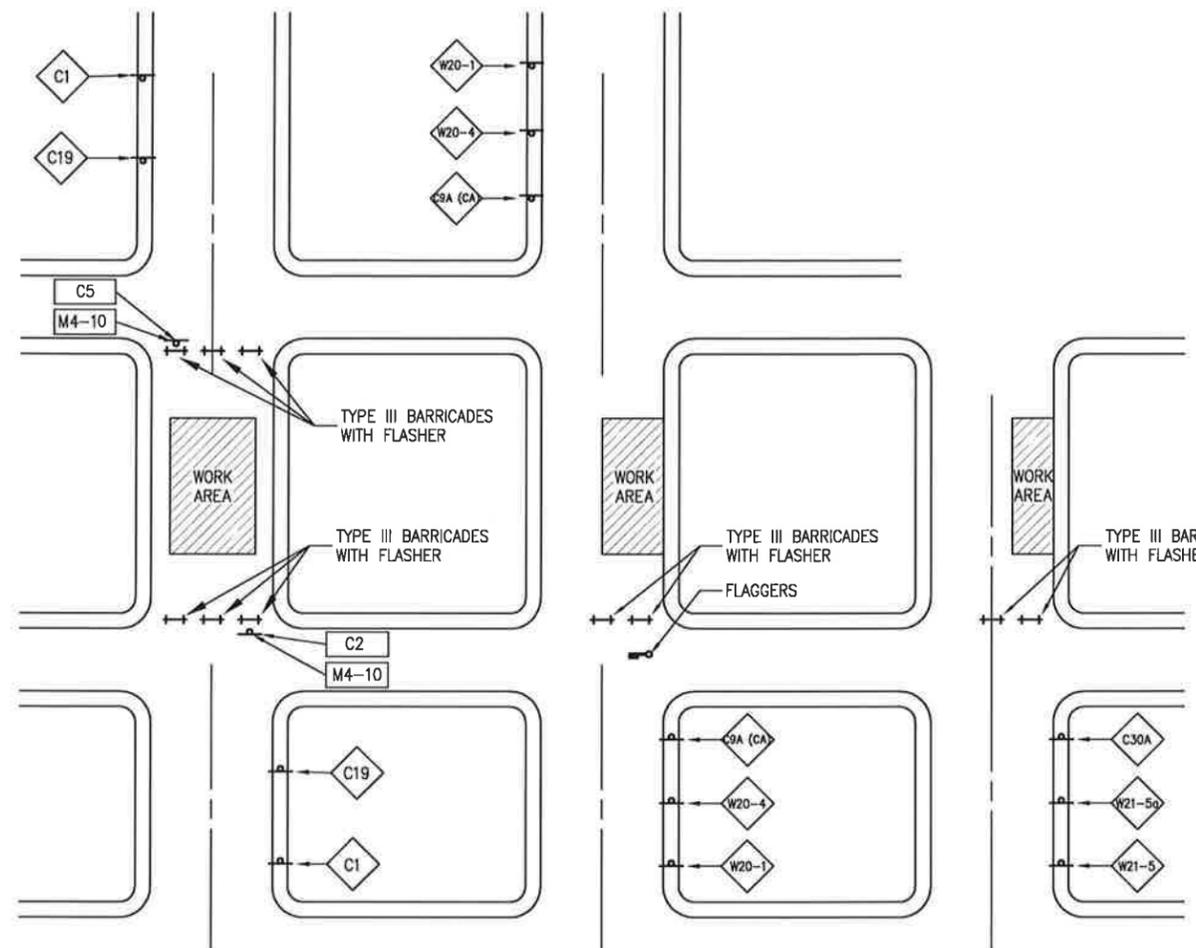


1 TYPICAL ROAD CLOSURE 2 TYPICAL LANE CLOSURE 3 TYPICAL SHOULDER CLOSURE

1 CLOSURE DETAILS
NOT TO SCALE

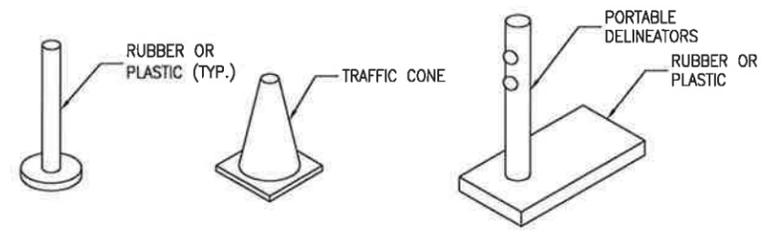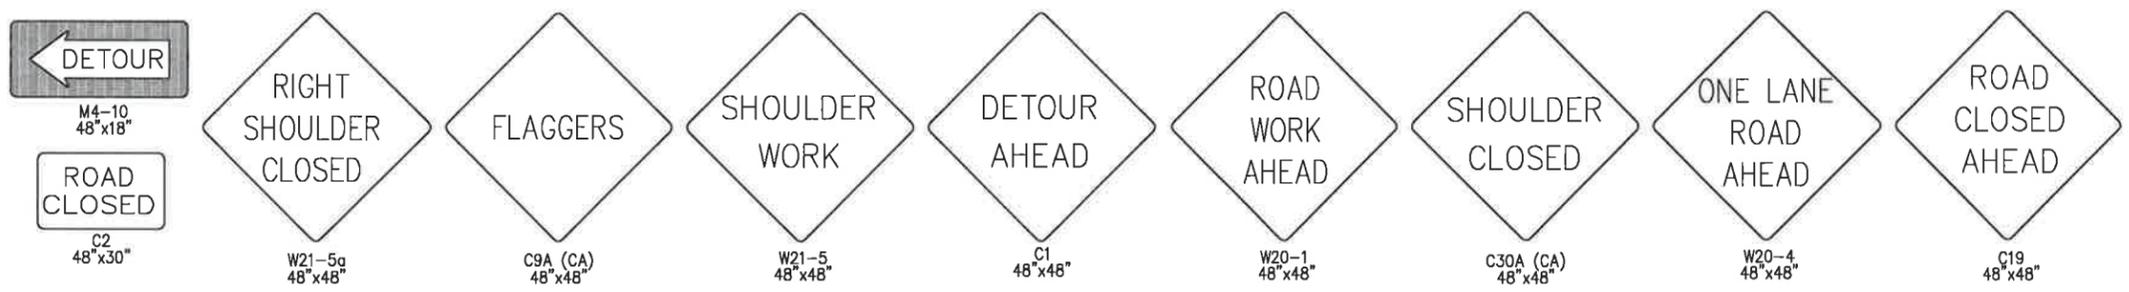

3 TRAFFIC DELINEATORS
NOT TO SCALE

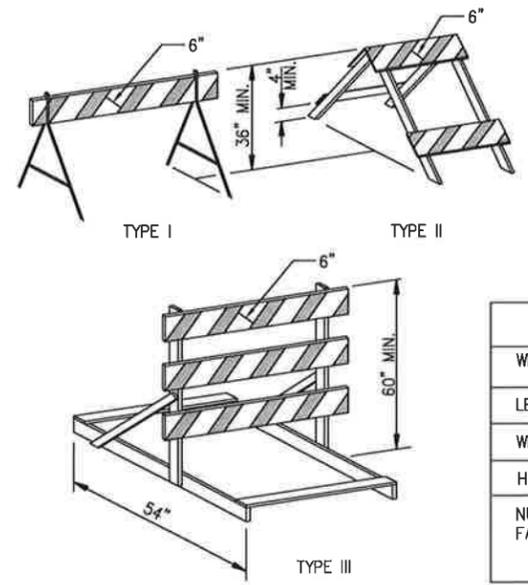

4 PORTABLE BARRICADES
NOT TO SCALE

NOTES

- PLACEMENT OF BARRICADES SHALL NOT PRECLUDE ENTRANCE OF EMERGENCY VEHICLES.
- ADDITIONAL DETOUR SIGNS MAY BE REQUIRED BY THE CITY ENGINEER.
- REFLECTORS AS REQUIRED BY THE CITY ENGINEER OR PUBLIC WORKS DIRECTOR.

REFERENCE DETAIL

OR SIGN PER
 TYPE III BARRICADE PER

BARRICADE AND PORTABLE FLASHER SUPPORT CHARACTERISTICS

TYPE	1	2	3	PORTABLE FLASHER SUPPORT
WIDTH OF RAIL	8" - 12"	8" - 12"	8" - 12"	TOP - 8" - 12" BOTTOM - 4" MIN.
LENGTH OF RAIL	2' MIN.	32" - 4'	3' MIN.	31" MAX.
WIDTH OF STRIPE	6"	6"	6"	4" OR 6"
HEIGHT	3' MIN.	3' MIN.	5' MIN.	30" MIN.
NUMBER OF RAIL FACES REFLECTORIZED	2	4	3 IF FACING TRAFFIC IN ONE DIRECTION. 6 IF FACING TRAFFIC IN TWO DIRECTIONS.	2 IF TOP RAIL IS 12" WIDE. 4 IF TOP RAIL IS LESS THAN 12" WIDE



Apr 03, 2015 - 2:13pm V:\CL\002\02\cad\goumei\04062-C-122.dwg

REV	DATE	DESCRIPTION	APPR

OWNERSHIP OF DOCUMENTS
THIS DOCUMENT, AND THE CONCEPTS AND DESIGNS PRESENTED HEREIN, AS AN INSTRUMENT OF SERVICE, IS THE PROPERTY OF GOUVEIA ENGINEERING, INC., AND IS INTENDED ONLY FOR THE SPECIFIC PURPOSE AND CLIENT FOR WHICH IT WAS PREPARED. REUSE, IN WHOLE OR IN PART, IS NOT PERMITTED WITHOUT WRITTEN AUTHORIZATION BY GOUVEIA ENGINEERING, INC.

GOUVEIA ENGINEERING, INC.
CONSULTING ENGINEERS
456 Sixth Street • Gustine, California 95322
Telephone (209) 854-3300 • Fax (209) 854-3600

CITY OF LOS BANOS
HENRY MILLER AREA STORM DRAIN AND L STREET WATERLINE
TRAFFIC CONTROL DETAILS

DESIGNED BY NWF, DGR	DATE 03/27/2015	DRAWING C-127
DRAWN BY NWF, AMT, DGR	DATE 04/02/2015	SHEET 27
CHECKED BY M. GOUVEIA	DATE 04/02/2015	OF 27 SHEETS
APPROVED M. GOUVEIA	DATE 04/03/2015	PROJECT NUMBER 835,02, 840,02

GOUVEIA ENGINEERING

Pre-Bid Conference
Meeting Minutes

City of Los Banos

Henry Miller Area Storm Drain and L Street Waterline

Conference held at Intersection of West I Street and L Street, in Los Banos on April 14, 2015.

Owner: City of Los Banos
Project Engineer: Gouveia Engineering, Inc.

PRE-BID MEETING MINUTES

1. All questions or RFI's must be submitted in writing to Greg Pimentel.
2. Plansheets are full scale when printed on 11 x 17.
 - *Item discussed and there were no questions or comments.*
3. This project is subject to California State Prevailing Wage Rates.
 - *Contractor must be registered with D.I.R. before project is awarded.*
4. Time for completion is 55 working days.
 - *Item discussed and there were no questions or comments.*
5. Special attention must be paid to all of the Work shown on the Plans and being described in the Special Provisions 24. Bid Item Descriptions.

The intent of bid item descriptions is to assist the Contractor in preparing the bid. Bid item descriptions may not address the entire scope of work under each item and do not relieve the Contractor's obligation to perform the entire work in conformance with the Contract Documents.

 - *Item discussed and there were no questions or comments.*
6. Construction in front of school to be completed during summer break.
 - *Contractor was referred to Special Provisions 4, Special Construction Requirements.*

7. Asphalt concrete trench repair is included in all related bid items.
 - *Trenches within 18" of the lip of gutter require the AC patch to extend to the lip of gutter.*
 - *If parallel trench repairs are within 18" of each other, the asphalt concrete repair shall extend to include the area between trench repairs.*
8. Water Services – trenching and transfers.
 - *New continuous poly service line is to be ran from new corp. stop at new waterline to the angle valve at the existing water meter.*
 - *Service transfer may require trenching if new poly cannot be pulled.*
9. Contractor has to maintain water and sewer services.
 - *Some down time is anticipated as services are transferred; the goal is to minimize inconvenience to residents. Contractor is responsible to notify residents and the Public Works Department 48 hours prior to the disruption of service.*
10. Hot tap at the intersection of I Street and L Street will be required to be cut in.
 - *Item discussed. Item will be clarified on Addendum No. 1.*
11. Hot tap at I Street and 4th Street, includes water valve in bid item.
 - *Item discussed and there were no questions or comments.*
12. Discuss fire hydrant connections. Connect to 2 existing hydrants. Two hydrants currently supplied by 4" line, replace hydrant and waterline, after hydrant connection reduce to 4" and connect to existing facilities. Work includes AC trench repair, water valve, piping, and concrete.
 - *Item discussed and there were no questions or comments.*
13. School domestic (not fire) service transfer. Replace 4" line with 6" waterline, install water valve, reduce to 4" and connect to existing at the meter. Work includes AC trench repair, concrete repair, piping and water valve.
 - *Item was discussed and sheet 6 of the planset was referenced. There were no questions or comments.*
14. One sign to be relocated.
 - *Item discussed and there were no questions or comments.*

15. When the proposed waterline connects to an existing waterline a 10” tee or 10” cross is to be used along with a reducer, reducing the proposed line to the same size as the existing followed by a valve sized to match the smaller size line.

➤ *Item discussed and there were no questions or comments.*

16. Underground electrical crossing in front of school, connects from power pole to PG&E Vault, new waterline will be adjusted accordingly.

➤ *Item discussed and sheet 5 of the planset was referenced. There were no questions or comments.*

17. Approximately 1000 feet of C-900 Class 200 is required on L Street east of Arizona Avenue.

➤ *Item discussed and there were no questions or comments.*

18. Existing gas line alignment on L Street is based on PG&E maps. If actual built location is in conflict with the proposed waterline then the new waterline may be adjusted accordingly.

➤ *Item discussed and there were no questions or comments.*

19. One existing water service transfer shown on sheet 8 at approx. 34+75 will be trenched.

➤ *The Contractor is required to dig up the corp. stop and shut it off at the water main.*

20. At the intersection of Delaware Avenue and L Street where the proposed storm drain is connecting to existing storm drain, there may be an existing manhole buried.

➤ *Item discussed and sheet 21 of the planset was referenced. There were no questions or comments.*

21. At the intersection of Idaho Avenue and K Street, where the proposed storm drain line crosses the existing sewer line, a section of the sewer line is to be removed and replaced with C-900 pipe.

➤ *Item discussed and sheet 19 of the planset was referenced. There were no questions or comments.*

22. A section of the existing 15” storm drain line on West I Street will be replaced with the proposed 36” line, changing the direction of flow.
- *Item discussed and sheet 16 of the planset was referenced. There were no questions or comments.*
23. The proposed sewer lines and sewer laterals on Texas Avenue.
- *Existing service location and depth is unknown.*
 - *Schedule of values will be used to adjust costs if assumed quantities vary from the existing field conditions. Manholes, cleanouts, lateral transfers, and AC repairs are included in the lump sum cost.*
24. Water main and water services adjustments related to the storm drain work.
- *Some service locations are unknown.*
 - *Discussed in depth.*
 - *Waterlines will need to be shut off and adjusted accordingly. Water service adjustments may require new poly to be ran from existing corp. stop to existing water meter. All costs related to these adjustments including the excavation and AC trench repairs are to be accounted for in the lump sum cost.*
 - *Water main adjustments were pointed out and shall be routed above storm drain.*
25. Existing 12” sewer line on Texas Avenue between West I Street and Pine Street is shown on city maps with a lamphole. This lamphole could not be found in the field.
- *Item discussed and there were no questions or comments.*
 - *It is not anticipated that this line will be in conflict with the proposed improvements.*
26. At the intersection of Texas Avenue and Pine Street, the existing sewer line will pass through proposed storm drain manhole. Replace sewer line with SDR-35. The storm drain manhole will be constructed with a sump to allow possible debris to pass through.
- *Item discussed and there were no questions or comments.*
27. Near the intersection at H Street and Texas Avenue, the existing waterline appears to be dipped and may require adjustment to clear the proposed SD pipe.
- *Item discussed and there were no questions or comments.*

28. The existing manhole and storm drain lines at the intersection of Texas Avenue and H Street.

➤ *Item discussed and there were no questions or comments.*

Additional Contractor Questions and Answers

- 1. Damaged stop markings and stop bars are to be completely removed and replaced.*
- 2. Yellow thermoplastic crosswalks – remove and replace the entire marking. A lead compliance plan is required for this project.*
- 3. Traffic Control measures may be left overnight.*
- 4. Excess spoils will become property of the Contractor. Refer to Technical Specifications, Section 1 Demolition.*
- 5. Open trenches need to have a cold mix surface patch or traffic rated plates before the end of the work day. Refer to sheet 2 General Notes.*
- 6. Precast manholes for 36” pipe may be submitted for review.*
- 7. New waterline on L Street includes vertical adjustments to avoid existing utilities.*
- 8. Water table is typically between 10’-14’ down.*

Note:

The project site was “walked” and items were discussed in the field at the location that was appurtenant to the item.

ADDENDUM NO. 1

Date of Addendum: April 23, 2015

Project: Henry Miller Area Storm Drain and L Street Waterline

Owner: City of Los Banos

Bid Date: May 1, 2015

To: Prospective Bidders

From: Gouveia Engineering
456 Sixth Street
Gustine, CA 95322

1. This Addendum forms a part of the Bidding Documents and will be incorporated into the Contract Documents, as applicable. All other conditions of the Contract Documents remain unchanged. The following changes, additions, or deletions as set forth herein shall apply to the Contract Documents and shall be made a part thereof and shall be subject to all the requirements thereof as though originally shown and/or specified.
2. The Contract Documents are hereby modified to effect the following changes:
 - a. Special Provisions Item **23. Submittals** shall be changed to include the following items as required submittals to be submitted by the Contractor:
 - i. Thermoplastic
 - ii. Pavement Paint
 - iii. Sign Posts
 - b. The City of Los Banos will accept high density polyethylene pipe (HDPE) non-pressure pipe, for the storm drain line portion of the project. Refer to attached specification (Attachment 1).
 - c. The following items shall be changed to address the modification to the waterline connection at the intersection of West I Street and L Street as installation of a hot tap at this location will no longer be allowed.
 - i. Construction Note 4 on sheet 4 of the Project Plans shall be revised to read: Connect to existing waterline. Remove the existing 6" waterline as required to install a 10" Tee with a 10" to 6" Reducer on the North leg and a 10" to 6" Reducer and 6" water valve on the South leg (Attachment 2).
 - ii. The Quantities of Items 5, 6, and 8 on the Bid Schedule have been revised. Replace Bid Schedule with attached Revised Bid Schedule.

- d. An additional waterline adjustment will be added to Bid Item 25. This adjustment will include adjusting the fire hydrant service line and installation of a new 6" valve. The Fire Hydrant is located on the Northeast corner at the intersection of Texas Avenue and Pine Street (Station 20+65) with a service line that crosses the proposed 36" Storm Drain Line. The following items will be changed to reflect this addition.
 - i. The Bid Item Description for Bid Item 25 – Water Main and Water Service Adjustments, shall be modified to include all work and materials required to reroute the existing fire hydrant service line to avoid any conflict with the proposed Storm Drain Line and installation of a 6" Isolation valve for the fire hydrant service.
 - ii. Plan sheet 14 shall be modified to include the adjustment of this fire hydrant service and the installation of a 6" isolation valve (Attachment 3).

- e. The following is a modification to Bid Item 12 providing additional clarification.
 - i. The Bid Item Description for Bid Item 12 – Transfer Existing Residential Water Service, shall be modified to include all work and materials required to locate the point of connection, excavate, shut-off the corp. stop, and AC repairs to California Avenue. The existing water meter box may be reused if undamaged.

3. Bids shall be submitted in accordance with this Addendum. All Bidders MUST acknowledge receipt of this Addendum by signing and returning this Addendum with your Bid.

Gouveia Engineering

Firm Name: _____


 By: Mario B. Gouveia, PE

By: _____

Title: _____

Date: _____

HIGH DENSITY POLYETHYLENE PIPE (HDPE) NON-
PRESSURE PIPE562 -1 GENERAL

The Contractor shall construct non-pressure HDPE pipelines with rubber gasket joints at all locations shown on the Drawings. HDPE shall be used only for storm drainage applications.

562-2 MATERIALS

Gravity HDPE pipe shall meet the following requirements:

- A. General - Pipe shall have a smooth interior and annular exterior corrugations. 4" through 10" shall meet AASHTO M252, Type S. 12- through 60-inch shall meet AASHTO M294, ASTM F2306.
- B. Material Properties – Pipe required to meet AASHTO M252/M294 or ASTM F2306 shall contain virgin materials for pipe and fitting production shall be high-density polyethylene conforming with the minimum requirements of cell classification 424420C for 4-inch through 10-inch diameters, and 435400C for 12-inch through 60-inch diameters, as defined and described in the latest version of ASTM D3350, except that carbon black content should not exceed 5%. The 12-inch through 60-inch virgin pipe material shall comply with the notched constant ligament-stress (NCLS) test as specified in Section 9.5 and 5.1 of AASHTO M294 and ASTM F2306 respectively.

In non-gravity low head applications or in areas of high groundwater a special pressure rated resin may be required to ensure long term performance of the pipe.

- C. Joint Performance – Pipe shall be joined with a bell and spigot and shall be watertight according to the requirements of ASTM D3212. Gaskets shall be made of polyisoprene meeting the requirements of ASTM F477. Gaskets shall be installed by the pipe manufacturer and covered with a removable, protective wrap to ensure the gasket is free from debris. A joint lubricant available from the manufacturer shall be used on the gasket and bell during assembly. 12-inch through 60-inch diameters shall have a reinforced bell with a bell tolerance device. The bell tolerance device shall be installed by the manufacture. Joints used in high groundwater applications shall be designed to include two gaskets that can be fully inserted into the bell.
- D. Fittings – Fittings shall conform to AASHTO M252, AASHTO M294, or ASTM F2306. Fabricated fittings shall be welded at all accessible interior and exterior junctions.

562-3 INSTALLATION

Installation shall be in accordance with ASTM D2321 and the manufacturers published installation guidelines, with the exception that minimum cover in non-city right of way installation for 4-inch through 48-inch diameters shall be one foot, and for 54-inch and 60-inch diameters, the minimum cover shall be 2 feet in single run applications. Minimum cover in city right of way applications shall be 2 feet 6-inches as specified in Section 3-43. HDPE drainage pipe shall be installed in accordance with ASTM Designation D-2321 using Class I or II embedment materials and City Standard Details BF-1 through BF-2. Jetting or flooding of backfill is not permitted.

If groundwater is encountered, piping shall be installed as per manufacturer's installation standards for installation in groundwater. If extreme groundwater conditions exist the City Engineer shall make determinations as to the proper installation and use of piping.

Unstable trench wall conditions exist if any of the following conditions occur:

- The excavation for the trench is below or within 3 feet of groundwater.
- The soil moisture content of the trench sidewall is 4% or more above optimum moisture content at the time of excavation.
- The relative compaction of the trench wall, in undisturbed material, is 75% or less of "Maximum Dry Density" in accordance with ASTM Designation D-1557.

562-4 INSPECTION


After cleaning and flushing HDPE pipelines a mandrel shall be applied as specified in Section 511-3.2. Any over-deflected pipe shall be re-laid. (The use of rounding devices is not acceptable.)

After the piping passes the mandrel test the pipeline shall be inspected with the use of a video camera. Video of pipelines shall be performed as described in Section 511-4.

This testing requirement shall apply to installations in both city right of way and non-city right of way.




NTS

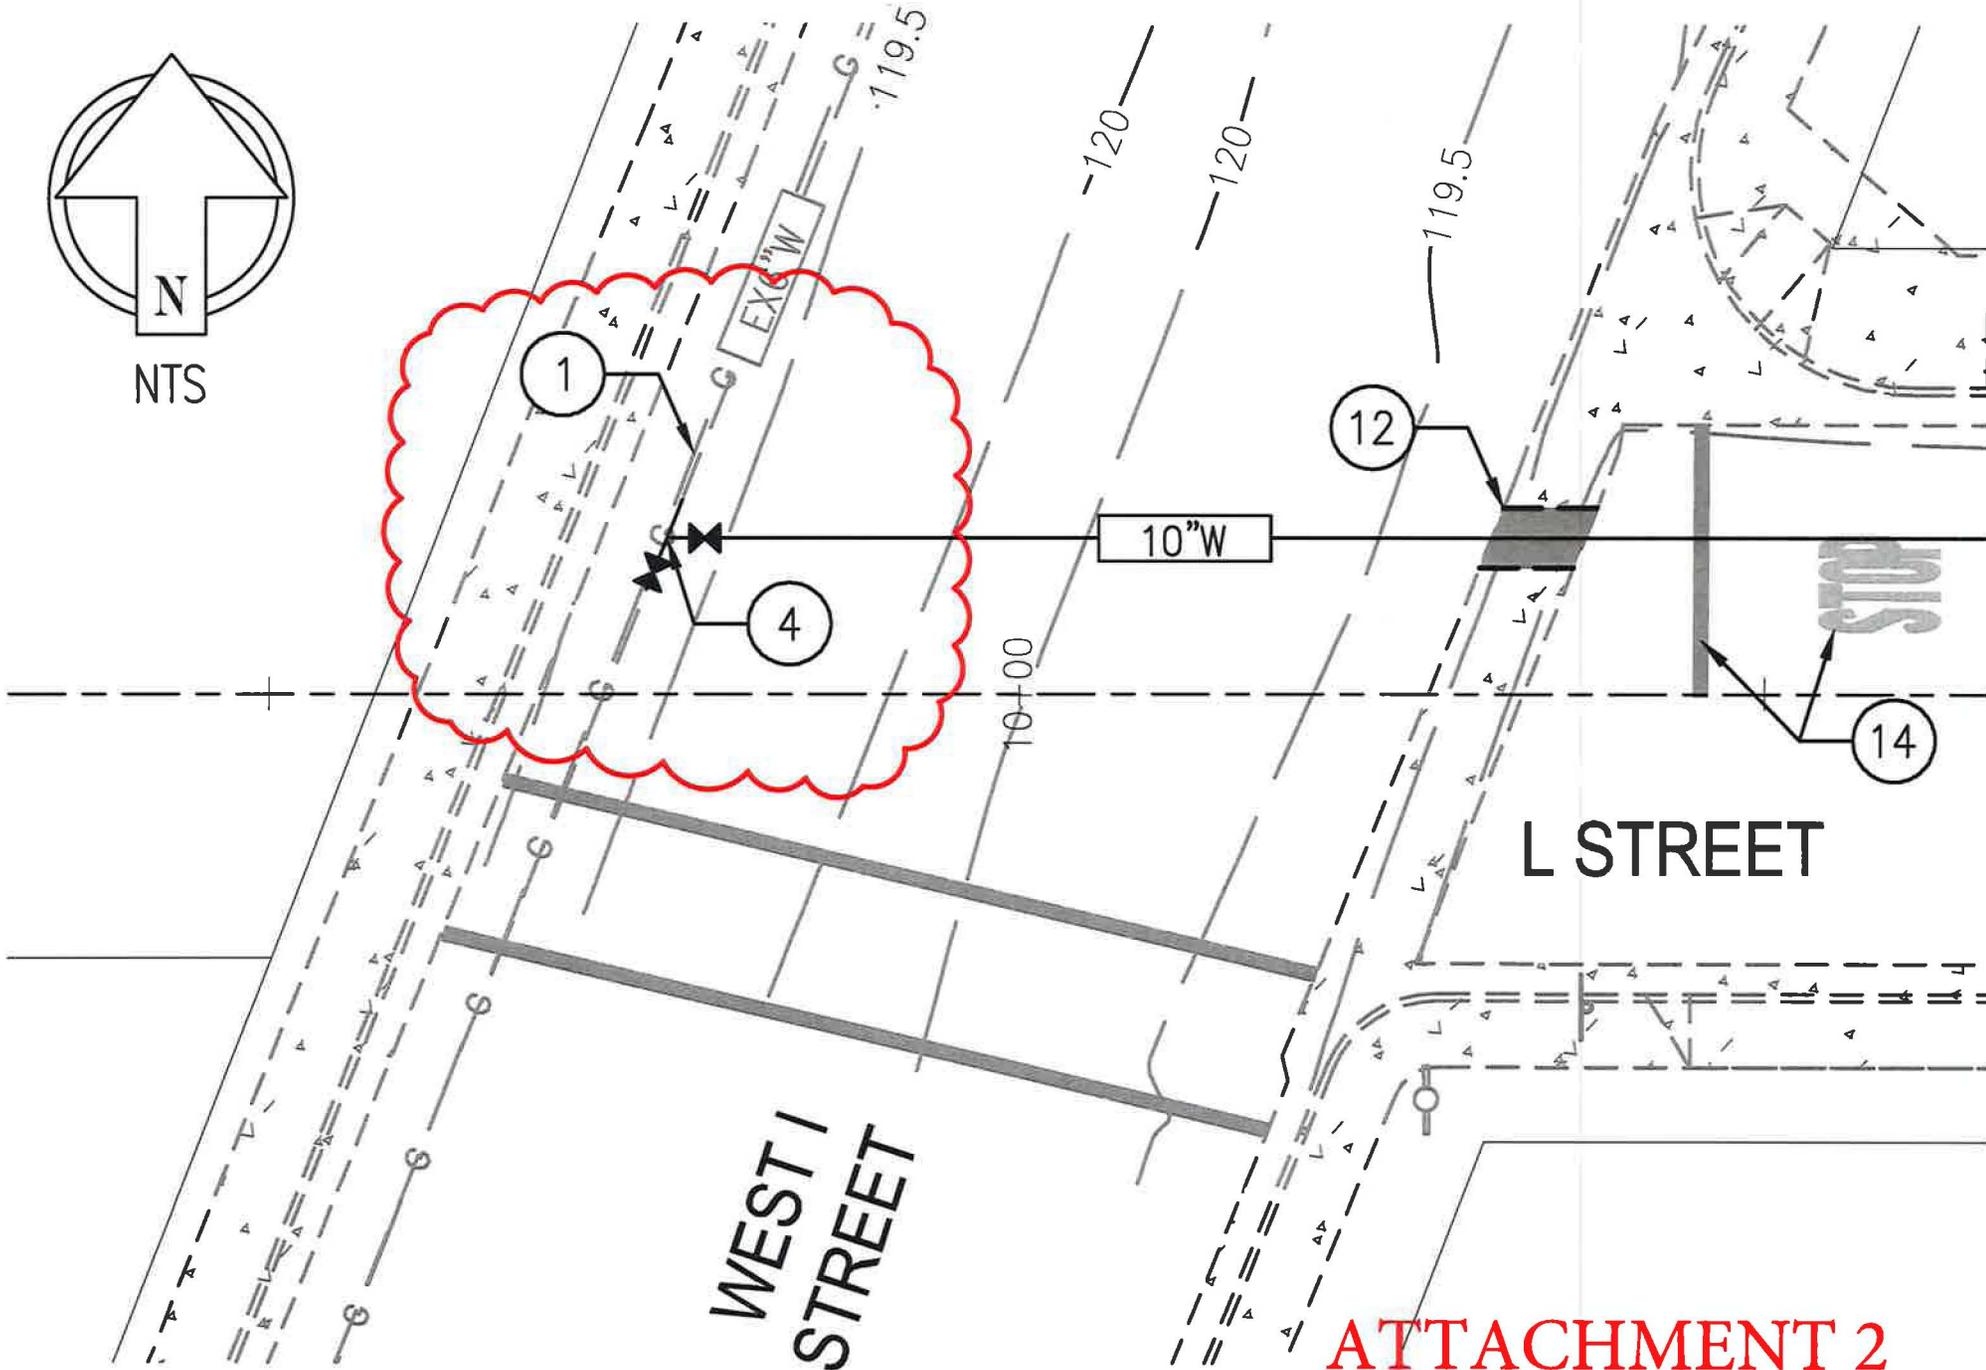

ATTACHMENT 2

ATTACHMENT 3

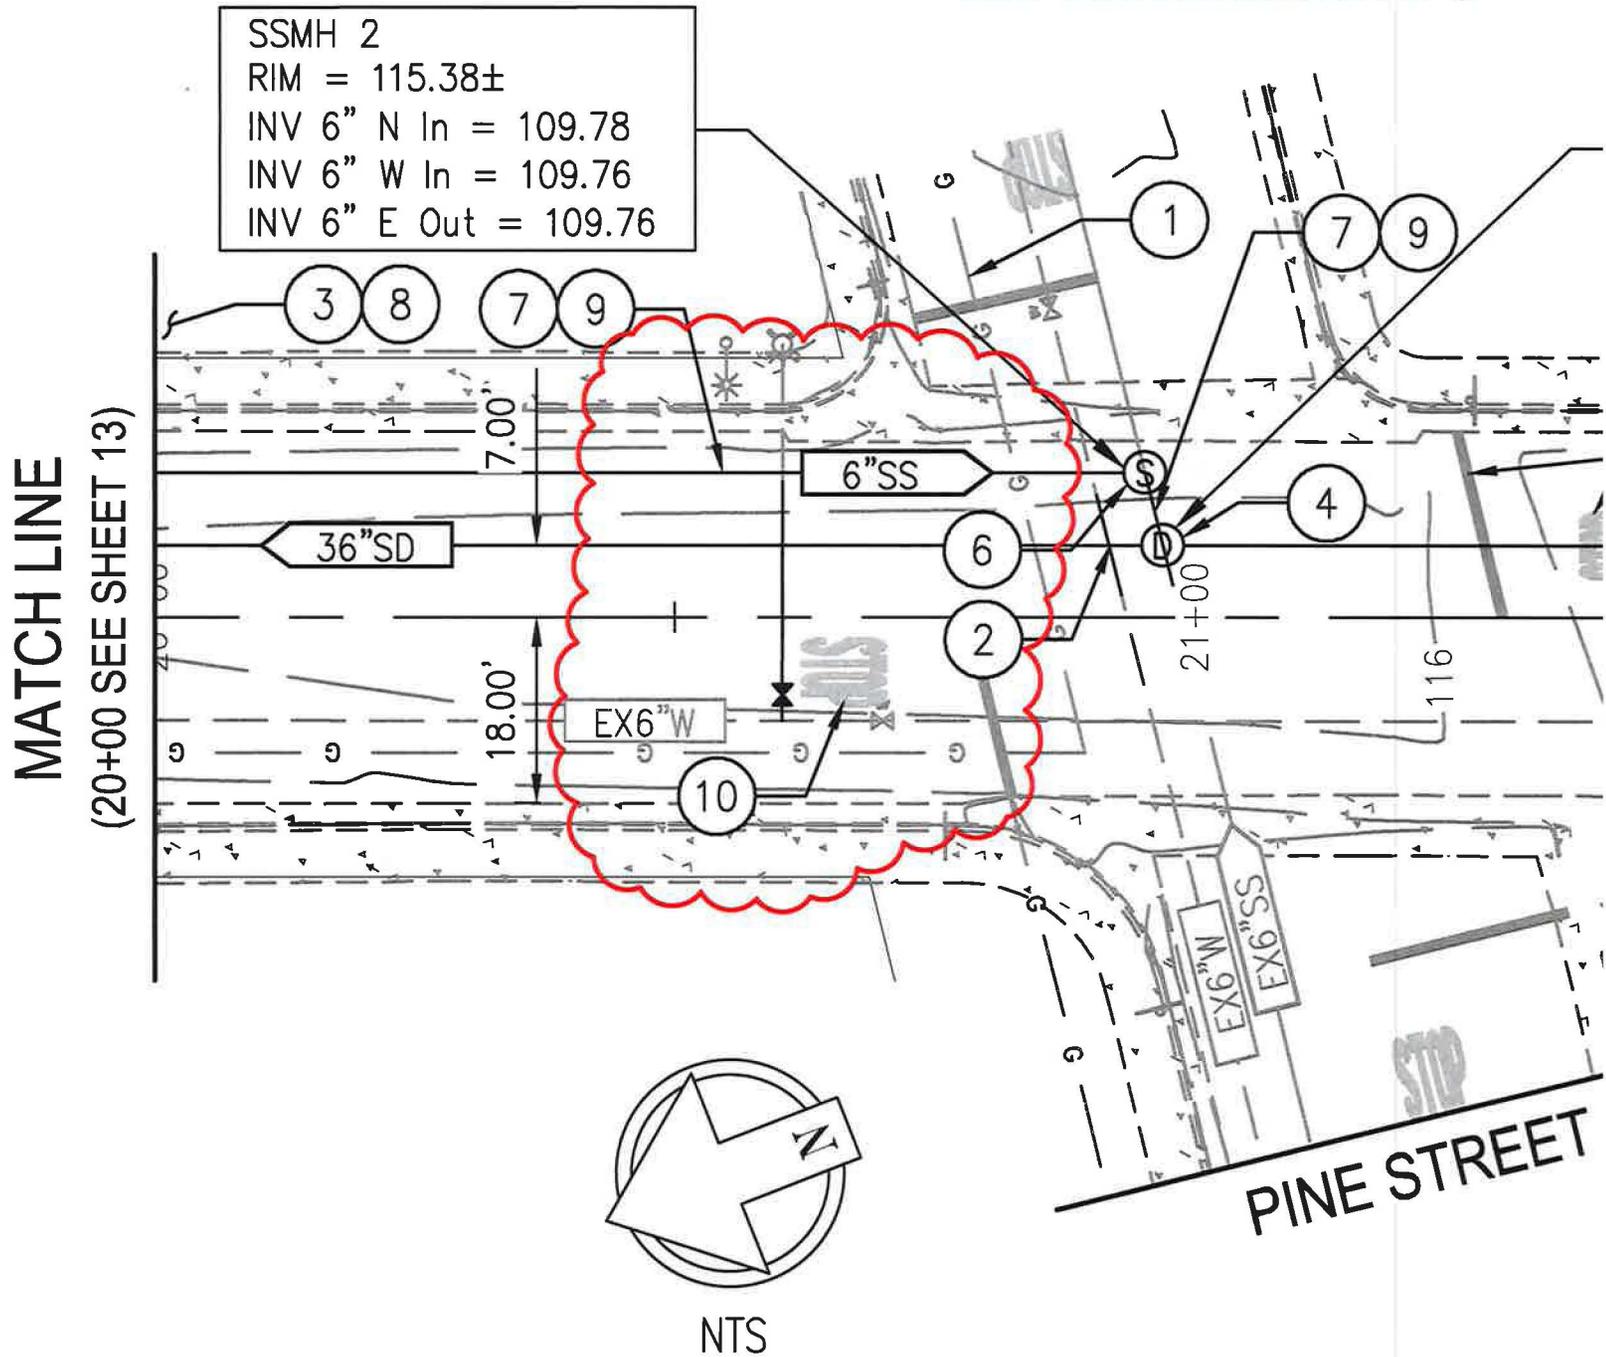

Revised Bid Schedule
For
HENRY MILLER AREA STORM DRAIN AND L STREET WATERLINE

BIDDER agrees to perform all the WORK described in the CONTRACT DOCUMENTS for the following unit and lump sum prices and understands that the quantity of WORK shown is approximate only. The schedule shall be completed by the BIDDER with the unit and lump sum prices entered in numerals. The extensions shall be made by the BIDDER. In case of discrepancy between the unit prices and the extension thereof, the unit price shall be considered as correct when evaluating BIDS.

ITEM NO.	ITEM	QUANTITY AND UNIT	UNIT PRICE	AMOUNT
L STREET WATERLINE				
1	Mobilization	1 LS	\$	\$
	<i>* (Item 1 Not to Exceed \$12,000.00)</i>			<i>* (See Note)</i>
2	Traffic Control	1 LS	\$	\$
	<i>** (Item 2 Not to Exceed \$18,000.00)</i>			<i>** (See Note)</i>
3	Furnish and Install 10" Waterline	3,325 LF	\$	\$
4	Furnish and Install 6" Waterline	40 LF	\$	\$
5	Furnish and Install 10" Water Valve	13 EA	\$	\$
6	Furnish and Install 6" Water Valve	16 EA	\$	\$
7	Furnish and Install 4" Water Valve	1 EA	\$	\$
8	Hot Taps	1 EA	\$	\$
9	Furnish & Install Fire Hydrant Assembly	4 EA	\$	\$
10	Transfer Existing Fire Hydrant Connection	2 EA	\$	\$
11	Transfer School Fire Service	1 EA	\$	\$
12	Transfer Existing Residential Water Service	18 EA	\$	\$
13	Remove and Re-Install Sign	1 EA	\$	\$
14	Furnish and Apply Thermoplastic Markings	1 LS	\$	\$
15	Construction Staking	1 LS	\$	\$

HENRY MILLER AREA STORM DRAIN

16	Mobilization	1	LS	\$	\$
					<i>*** (See Note)</i>
<i>*** (Item 16 Not to Exceed \$18,000.00)</i>					
17	Traffic Control	1	LS	\$	\$
					<i>**** (See Note)</i>
<i>**** (Item 17 Not to Exceed \$23,000.00)</i>					
18	Furnish and Install 36" Storm Drain Pipe	3,198	LF	\$	\$
19	Furnish and Install 18" Storm Drain Pipe	340	LF	\$	\$
21	Furnish and Install 12" Storm Drain Pipe	160	LF	\$	\$
22	Furnish and Install Storm Drain Manhole	11	EA	\$	\$
22	Construct Storm Drain Catch Basin	3	EA	\$	\$
23	Sheeting, Shoring, and Bracing	1	LS	\$	\$
24	Sewer Line Installation and Sewer Service Reconnections	1	LS	\$	\$
25	Water Main and Water Service Adjustments	1	LS	\$	\$
26	Furnish and Apply Thermoplastic and Paint Markings and Striping	1	LS	\$	\$
27	Construction Staking	1	LS	\$	\$
				TOTAL:	\$

Note: The representations made herein are made under penalty of perjury. Any information contained in the BID which is proven false shall be considered nonresponsive and this BID shall be rejected.